



P0K1.232.3K.B.010.M.U


Platinum sensor with inverted wires and metallized backside

For medium temperatures

Benefits & Characteristics

- Excellent long-term stability
- Low self-heating
- Fast response time
- Metallized backside for increased thermal coupling
- Inverted leads

Illustration¹⁾

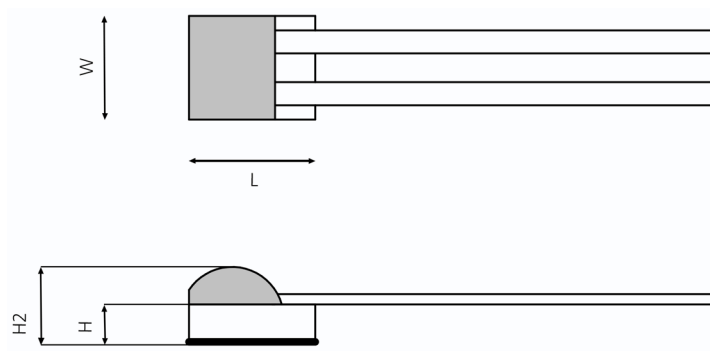

Technical Data

| | |
|---|--|
| Operating temperature range: | -200 °C to +300 °C |
| Nominal resistance: | 100 Ω at 0 °C |
| Characteristics curve: | 3850 ppm/K |
| Long-term stability: | < 0.04 % at 1000 h at maximal operating temperature |
| Tolerance class (dependent on temperature range): | IEC 60751 F0.3 B (IST AG reference) |
| Connection: | Ni-wire Au-coated, Ø 0.2 mm, 10 mm long, contacts inversed |
| Dimensions (L x W x H / H2): | 2.2 x 2.0 x 0.65 / 1.1 |
| Tolerance (chip): | L ±0.2 mm, W ±0.2 mm, H ±0.1 mm, H2 ±0.3 mm |
| Special: | Metallized backside and inverted wires |



Product Photo



Order Information

| | | |
|-----------------------|--------------|------------------------|
| Description: | Item number: | Former main reference: |
| P0K1.232.3K.B.010.M.U | 101045 | 010.02394 |

Additional Documents

| | |
|-------------------|----------------|
| Application Note: | Document name: |
| | ATP_E |



Innovative Sensor Technology IST AG, Stegrütistrasse 14, 9642 Ebnat-Kappel, Switzerland
Phone: +41 71 992 01 00 | Fax: +41 71 992 01 99 | Email: info@ist-ag.com | www.ist-ag.com

All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Typing errors and mistakes reserved • Product specifications are subject to change without notice • All rights reserved