

## Specification Sheet

Part Number: MB4A10C2


For use with HellermannTyton T18 - T50 cable ties to provide stability when securing bundles.

4-way opening allows cable ties to be installed parallel or perpendicular to bundles.

The rubber-based adhesive is an economical choice ideal for indoor applications, with a static load weight of 1.1 lb.

Two predrilled holes extend mounting options and solutions.

Extended adhesive liner is easy to remove quickly.

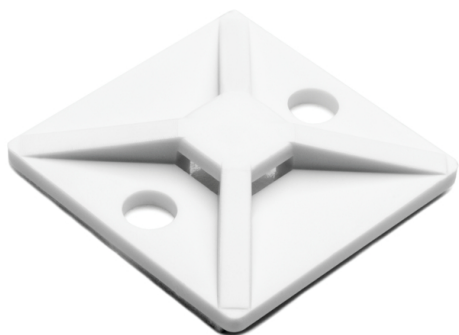

Rubber Adhesive Cable Tie Mount, 1.12" x 1.12", Use With T18-T50 Cable Tie, PA66, White, 100/pkg

Article Number 151-28421

Type MB4A

Color White (WH)

Quantity Per bag

Product Description MB4A adhesive mounts are for use with HellermannTyton T18 - T50 Series cable ties to provide stability when securing bundles. The rubber adhesive-backed mounts can be used to secure a bundle and have two predrilled holes to extend mounting options.

|                                       |  |
|---------------------------------------|--|
| Short Description                     | Rubber Adhesive Cable Tie Mount, 1.12" x 1.12", Use With T18-T50 Cable Tie, PA66, White, 100/pkg |
| Global Part Name                      | MB4A-PA66-WH   |
| Length L (Imperial)                   | 1.12   |
| Length L (Metric)                     | 28.5   |
| Fixation Method                       | Screw Mounting and Adhesive  |
| Width W (Imperial)                    | 1.12   |
| Width W (Metric)                      | 28.5   |
| Cable Ties                            | T18 - T50  |
| Height H (Imperial)                   | .22  |
| Height H (Metric)                     | 5.6  |
| Cable Tie Width Max (Imperial)        | 0.18   |
| Cable Tie Width Max (Metric)          | 4.6  |
| Mounting Hole Diameter D (Imperial)   | 0.18   |
| Mounting Hole Diameter D (Metric)     | 4.6 mm   |
| Mounting Hole Diameter D Max (Metric) | 4.6  |

|                                  |   |
|----------------------------------|---|
| Mounting Hole Centers (Imperial) | 0.8   |
| Material                         | Polyamide 6.6 (PA66)                            |
| Material Shortcut                | PA66  |
| Adhesive                         | Synthetic rubber with base of polyethylene foam |
| Flammability                     | UL 94 V-2 (excluding adhesive)                  |
| Adhesive Operating Temperature   | 0°F to +150°F (-18 °C to +66 °C)                |
| Operating Temperature            | -40°F to +185°F (-40°C to +85°C)                |
| Reach Compliant (Article 33)     | No  |
| ROHS Compliant                   | Yes   |
| Package Quantity (Imperial)      | 100   |
| Package Quantity (Metric)        | 100   |
| Customs Number                   | 3926909988                                      |

