



.88 [22.2] DIA. KNOCKOUT  
(3) PLACES FOR  
WIRING CONNECTIONS

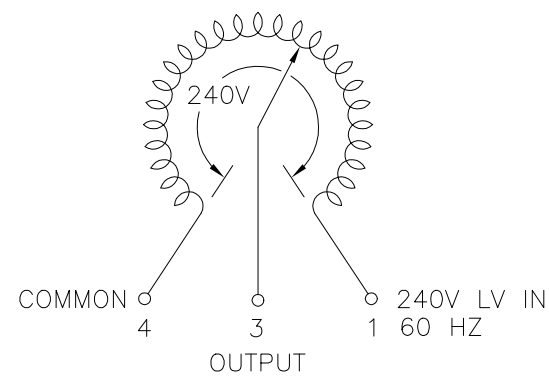

SCHMATIC  
VIEW FROM BASE END  
FUSE RECOMMENDED BUT NOT SUPPLIED

SPECIFICATIONS										
WIRING	INPUT		OUTPUT				SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS		
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD	CONSTANT IMPEDANCE LOAD	FOR INCREASING VOLTAGE AS VIEWED FROM BASE END		INPUT	JUMPER	OUTPUT
SINGLE PHASE	240	60	0-240	MAX. AMPS	MAX. KVA	MAX. AMPS	MAX. KVA	CW	1-4	4-3
				5.0	1.20	7.0	1.68	CCW	1-4	1-3
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ±			UNITS			TITLE: SPEC. CONTROL DRAWING				
DECIMALS			IN [mm]			VARIABLE TRANSFORMER				
.XX .0000 .06			1"			MODEL: 1220BCT				
.XXX .005			ALL DIMENSIONS APPLY AFTER PLATING			DRAWN BY: S.A. SMITH				
MATERIAL:			DATE: 9/26/97			FIRST USED ON:			DO NOT SCALE DWG.	
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.			CHECKER:			WEIGHT APPROX. 10.25 LBS			CAGE CODE 83008	
			ENGINEER:			SCALE 1=1			DWG. NO. 031-3306	
						SHEET 1 OF 1			D	

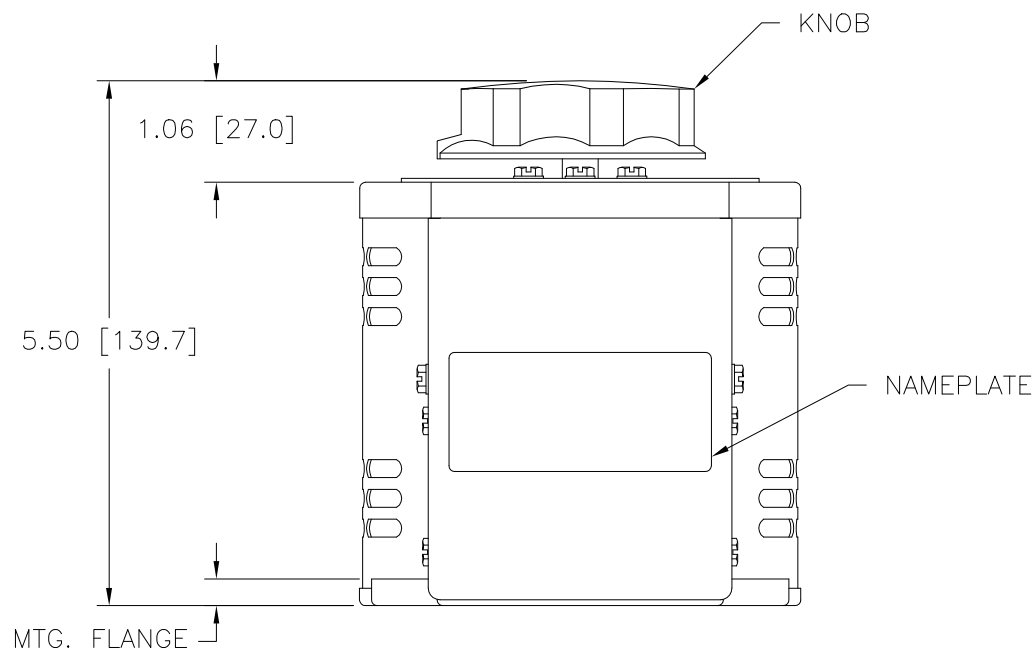

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Staco:](#)

[1220BCT](#)