



96KVM-H17V8U-XX

Drawer Features & Display Benefits

- ▶ 1U 17" FHD LCD console drawer w/ combo DB-15 8-port KVM
- ▶ Support Full HD with 1080p resolution
- ▶ Green LED-backlit panel technology
- ▶ 104-key keyboard with touchpad
- ▶ New enhanced aesthetics with molded front handle
- ▶ Short depth design of 580mm



Specifications

• LCD Panel

| | |
|------------------------|----------------------|
| Size (diagonal) : | 17.3" widescreen TFT |
| Max resolution : | 1920 x 1080 |
| Brightness (cd/m2) : | 400 |
| Backlight : | LED |
| Colors : | 16.7 M, 8-bit |
| Contrast ratio (typ) : | 600 : 1 |
| Viewing angle (H/V) : | 160° x 140° |
| Active area (mm) : | 382 x 215 |
| MTBF (hrs) : | 50,000 |
| Video input : | VGA |

• Keyboard layout : USA English

• Weight

| | |
|---------|---------------------|
| Net : | 11.6 kgs / 25.5 lbs |
| Gross : | 17.5 kgs / 38.5 lbs |

• Casing Color : Black (RAL 9005)

• Dimensions

| | |
|-----------|---|
| Product : | 441.6 x 580 x 44 mm / 17.4 x 22.8 x 1.73 inch |
| Packing : | 590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch |

• Power Input : Auto-sensing 100 to 240VAC, 50 / 60Hz

• Power Consumption with KVM integration

| | |
|---------------------|----------|
| Screen on : | Max. 55W |
| Power saving mode : | Max. 34W |


• Environmental

| | |
|--------------------------|------------------------------------|
| Operating temperature : | 0 to 55°C degree |
| Storage temperature : | -20 to 60°C degree |
| Operating humidity : | 20~90%, non-condensing |
| Storage humidity : | 5 ~90%, non-condensing |
| Operating altitude : | 16,000 ft |
| Non-operating altitude : | 40,000 ft |
| Shock : | 10G acceleration (11ms duration) |
| Vibration : | 5~500Hz 1G RMS random vibration |

• Regulatory

| | |
|-----------------|-------------------------|
| Safety : | FCC & CE certified |
| Environmental : | RoHS2 & REACH compliant |

Combo DB-15 KVM



KVM port : 8 x combo DB-15 connector

Server Support

Video : Resolution up to 1920 x 1080 / 1920 x 1200


KVM Switching : via Front button, OSD menu & hotkeys

Connectivity : Combo 4-in-1 KVM cable

Combo KVM Cable : CE-6, 6 feet combo KVM cable (bundle 8 pcs)
CE-10, 10 feet combo KVM cable (optional)
CE-15, 15 feet combo KVM cable (optional)
(Server end : VGA + USB or PS/2)
(KVM port : VGA)

Standard Keyboard

Ge G keyboard integrated with touchpad

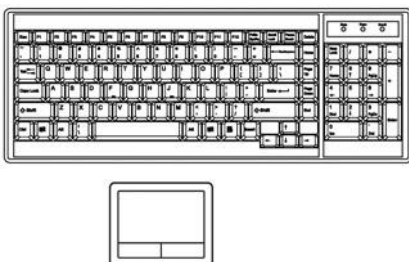

Optional layouts

| | | | | | |
|------|----------------|---------|-------------|-------------|----------|
| | | | | | |
| EMEA | United Kingdom | Germany | France | Spain | Norway |
| | | | | | |
| | Italy | Russia | Switzerland | Netherlands | Portugal |
| Asia | | | | | |
| | China | Japan | Korea | Arabia | Turkey |

Ordering Part Number

| Model | Plug Type |
|-----------------|---------------|
| 96KVM-H17V8U-EU | European Plug |
| 96KVM-H17V8U-IN | Indian Plug |
| 96KVM-H17V8U-US | US Plug |
| 96KVM-H17V8U-UK | UK Plug |