


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0015913400](#)
Status: **Active**
Overview: C-Grid Connector Products
Description: 2.54mm Pitch C-Grid Breakaway Header, Surface Mount, Dual Row, Vertical, 40 Circuits, 0.76µm Gold (Au) Selective Plating, without PCB Locator Pegs

Documents:

3D Model	Application Specification 713080001-AS-000 (PDF)
3D Model (PDF)	Packaging Specification 713080001-PK-000 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-71308-001 (PDF)	

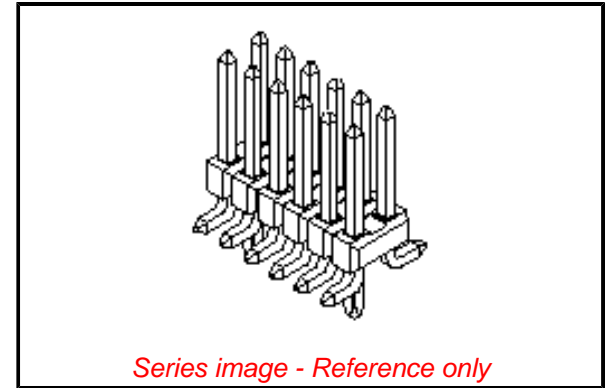

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	71308
Application	Board-to-Board, Signal, Wire-to-Board
Component Type	PCB Header
Overview	C-Grid Connector Products
Product Name	C-Grid
Taxonomy	PCB Headers and Receptacles
UPC	800753977730

Physical

Breakaway	Yes
Circuits (Loaded)	40
Circuits (maximum)	40
Color - Resin	Black
Durability (mating cycles max)	50
Flammability	94V-0
Glow-Wire Capable	No
Lock to Mating Part	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	2.589/g
Number of Rows	2
Orientation	Vertical
PCB Locator	No
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface	2.54mm
Plating min - Mating	0.813µm
Plating min - Termination	2.032µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	Yes
Temperature Range - Operating	-40° to +120°C
Termination Interface: Style	Surface Mount

Electrical

Current - Maximum per Contact	3.0A
-------------------------------	------

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[71308 Series](#)

Mates With

C-Grid Surface Mount Right-Angle PCB Receptacle [71979](#) . C-Grid Surface Mount Vertical PCB Receptacle [71395](#) . C-Grid Through-hole Vertical PCB Receptacle [71850](#) . C-Grid Shunt Terminal Housing [7859](#)

Voltage - Maximum 250V

Solder Process Data

Duration at Max. Process Temperature (seconds) 030

Lead-free Process Capability REFLOW

Max. Cycles at Max. Process Temperature 003

Process Temperature max. C 260

Material Info

Engineering Number 71308-0240N

Reference - Drawing Numbers

Application Specification 713080001-AS-000

Packaging Specification 713080001-PK-000

Product Specification PS-71308-001

Sales Drawing 713080000-SD-000

This document was generated on 01/05/2023

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION