

## LOW POWER DUAL OPERATIONAL AMPLIFIERS

HWD358

### General Description

The HWD358 consists of two independent, high gain and internally frequency compensated operational amplifiers, it is specifically designed to operate from a single power supply. Operation from split power supply is also possible and the low power supply current drain is independent of the magnitude of the power supply voltages.

### Features

- Internally frequency compensation
- Large voltage gain
- Low input bias current
- Low input offset voltage
- Large output voltage swing
- Wide power supply voltage range:  
Single supply 3V to 18V  
or dual supplies  $\pm 1.5V$  to  $\pm 9V$
- Low supply current drain: 500uA
- Compatible with industry standard 358

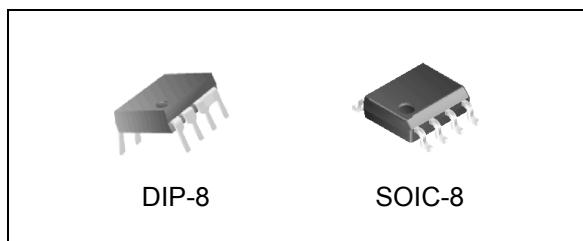



Figure 1. Package Types of HWD358

### Applications

- Battery Charger
- Cordless Telephone
- Switching Power Supply

### Pin Configuration

M Package/P Package  
(SOIC-8/DIP-8)

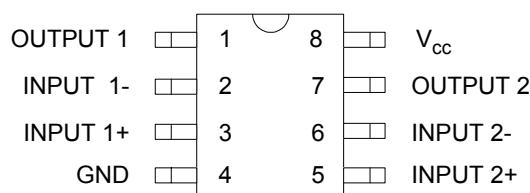

Top View

Figure 2. Pin Configuration of HWD358

## Functional Block Diagram

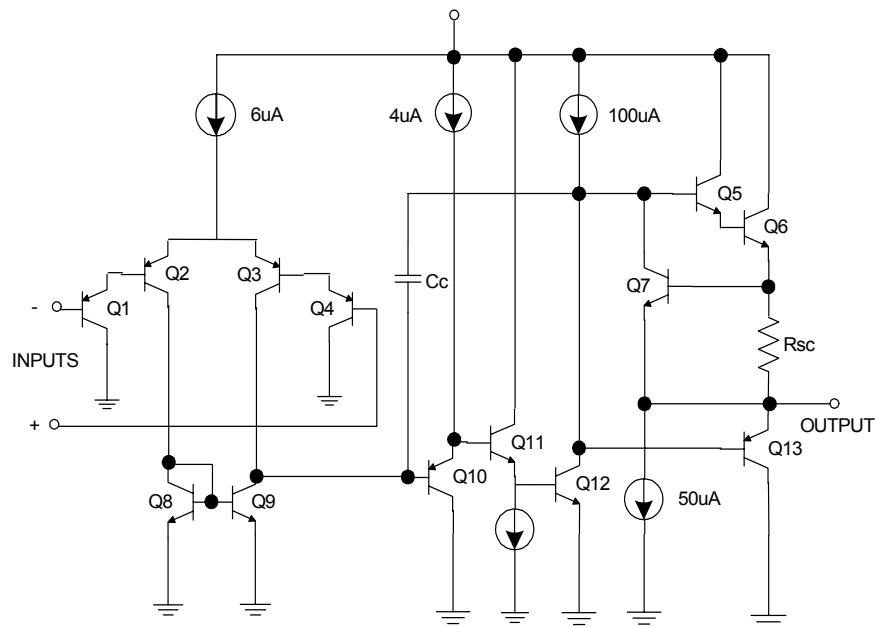


Figure 3. Functional Block Diagram of HWD358  
(Each Amplifier)

## **Ordering Information**

Package	Temperature Range	Part Number	Packing Type
SOIC-8	-40°C~85°C	HWD358M	Tube/Reel
DIP-8		HWD358P	Tube

**Absolute Maximum Ratings (Note 1)**

(Operation temperature range applies unless otherwise specified.)

Parameter	Symbol	Value		Unit
Power Supply Voltage	V <sub>CC</sub>	20		V
Differential Input Voltage	V <sub>ID</sub>	20		V
Input Voltage	V <sub>IC</sub>	-0.3 to 20		V
Input Current (V <sub>IN</sub> <-0.3V) (Note 2)	I <sub>IN</sub>	50		mA
Output Short-Circuit to Ground (One Amplifier) (Note 3) V <sub>CC</sub> ≤ 12V and T <sub>A</sub> = 25°C		Continuous		
Power Dissipation	P <sub>D</sub>	DIP-8	830	mW
		SOIC-8	550	
Operating Temperature Range	T <sub>OP</sub>	-40 to 85		°C
Storage Temperature Range	T <sub>STG</sub>	-65 to 150		°C
Lead Temperature (Soldering, 10 Seconds)		260		°C
ESD (Machine Mode)		200		V

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operation Ratings" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Note 2: This input current will only exist when the voltage at any of the input leads is driven negative. It is due to the collector-base junction of the input PNP transistors becoming forward biased and thereby acting as input diode clamps. In addition to this diode action, there is also lateral NPN parasitic transistor action on the IC chip. This transistor action can cause the output voltages of the op amps to go to the V<sub>CC</sub> voltage level (or to ground for a large overdrive) for the time duration that an input is driven negative. This is not destructive and normal output states will re-establish when the input voltage, which was negative, again returns to a value greater than -0.3V (at 25°C)

Note 3: Short circuits from the output to V<sub>CC</sub> can cause excessive heating and eventual destruction. When considering short circuits to ground, the maximum output current is approximately 40mA independent of the magnitude of V<sub>CC</sub>. At values of supply voltage in excess of +12V, continuous short-circuits can exceed the power dissipation ratings and cause eventual destruction. Destructive dissipation can result from simultaneous shorts on all amplifiers.

## LOW POWER DUAL OPERATIONAL AMPLIFIERS

HWD358

**Electrical Characteristics**V<sub>CC</sub>=5V, GND=0, T<sub>A</sub>=25°C unless otherwise specified.

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Input Offset Voltage	V <sub>IO</sub>	V <sub>O</sub> :1.4V, R <sub>S</sub> : 0Ω, V <sub>CC</sub> : 5V to 15V		2	5	mV
Input Bias Current (Note 4)	I <sub>BIAS</sub>	I <sub>IN+</sub> or I <sub>IN-</sub> , V <sub>CM</sub> =0V		20	200	nA
Input Offset Current	I <sub>IO</sub>	I <sub>IN+</sub> or I <sub>IN-</sub> , V <sub>CM</sub> =0V		5	50	nA
Input Common Mode Voltage Range (Note 5)	V <sub>IR</sub>	V <sub>CC</sub> =15V	0		V <sub>CC</sub> -1.5	V
Supply Current	I <sub>CC</sub>	R <sub>L</sub> =∞, Over full temperature range on all OP Amps	V <sub>CC</sub> =15V V <sub>CC</sub> =5V	0.7 0.5	1.5 1.2	mA
Large Signal Voltage Gain	G <sub>V</sub>	V <sub>CC</sub> =15V, R <sub>L</sub> ≥2K, V <sub>0</sub> =1V to 11V	80	90		dB
Common Mode Rejection Ratio	CMRR	V <sub>CM</sub> =0V to (V <sub>CC</sub> -1.5)V	70	90		dB
Power Supply Rejection Ration	PSRR	V <sub>CC</sub> =5V to 15V	70	90		dB
Channel Separation (Note 6)	CS	f=1KHz to 20KHz		-120		dB
Output Current	Source	I <sub>SOURCE</sub>	V+=1V, V-=0V, V <sub>CC</sub> =15V, V <sub>0</sub> =2V	20	45	mA
	Sink	I <sub>SINK</sub>	V+=0V, V-=1V, V <sub>CC</sub> =15V, V <sub>0</sub> =2V	10	20	mA
			V+=0V, V-=1V, V <sub>CC</sub> =15V, V <sub>0</sub> =200mV	12	50	uA
Short Circuit to Ground	I <sub>SC</sub>	V <sub>CC</sub> =15V		45	60	mA
Output Voltage Swing	V <sub>OH</sub>	V <sub>CC</sub> =15V, R <sub>L</sub> =2K	12			V
		V <sub>CC</sub> =15V, R <sub>L</sub> =10K	12.5	13.5		
	V <sub>OL</sub>	V <sub>CC</sub> =5V, R <sub>L</sub> =10K		5	20	mV

Note 4: The direction of the input current is out of the IC due to the PNP input stage. This current is essentially constant, independent of the state of the output so no loading change exists on the input lines.

Note 5: The input common-mode voltage of either input signal voltage should not be allowed to go negatively by more than 0.3V (at 25°C). The upper end of the common-mode voltage range is V<sub>CC</sub> - 1.5V (at 25°C), but either or both inputs can go to +18V without damages, independent of the magnitude of the V<sub>CC</sub>.

Note 6: Due to proximity of external components, insure that coupling is not originating via stray capacitors between these external parts. This typically can be detected as this type of capacitance increases at higher frequencies.

## Typical Characteristics

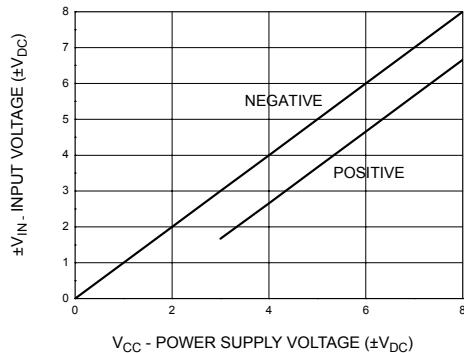


Figure 4. Input Voltage Range

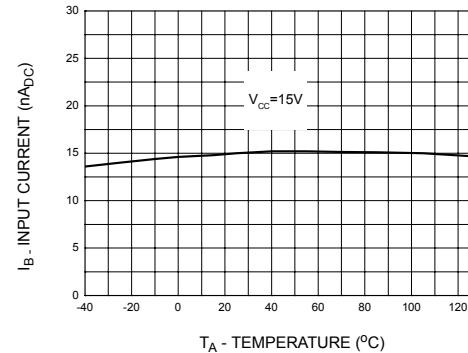


Figure 5. Input Current

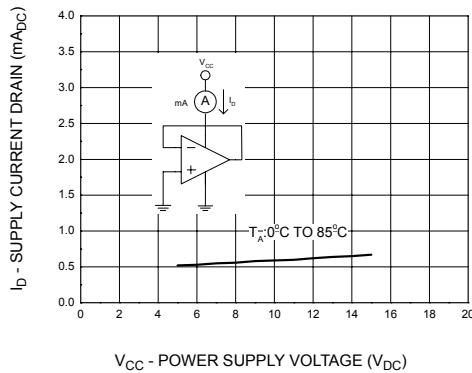


Figure 6. Supply Current

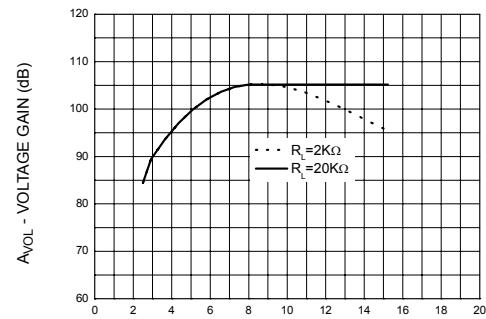


Figure 7. Voltage Gain

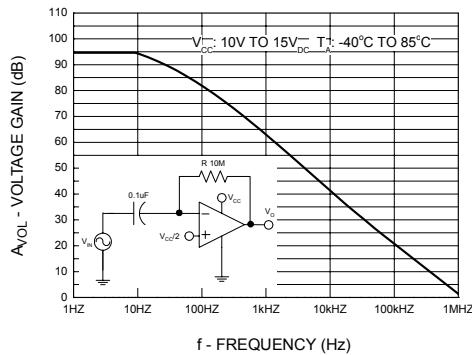


Figure 8. Open Loop Frequency Response

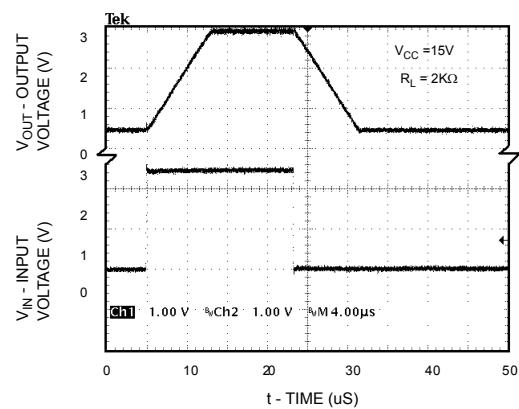


Figure 9. Voltage Follower Pulse Response

## Typical Characteristics (Continued)

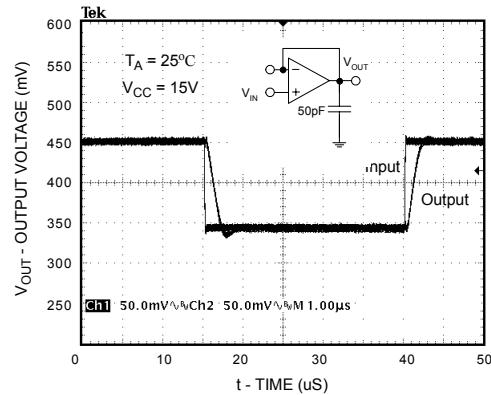


Figure 10. Voltage Follower Pulse Response (Small Signal)

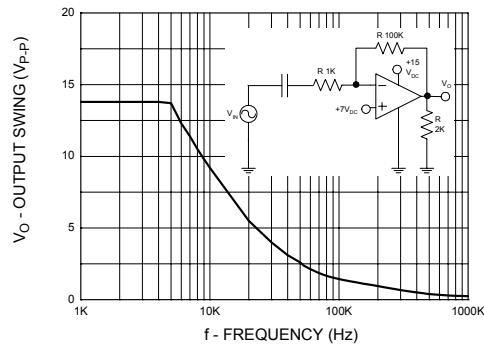


Figure 11. Large Signal Frequency Response

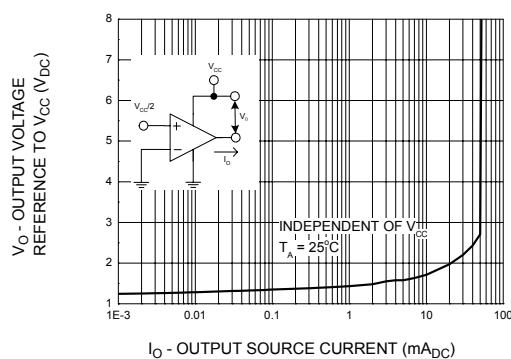


Figure 12. Output Characteristics Current Sourcing

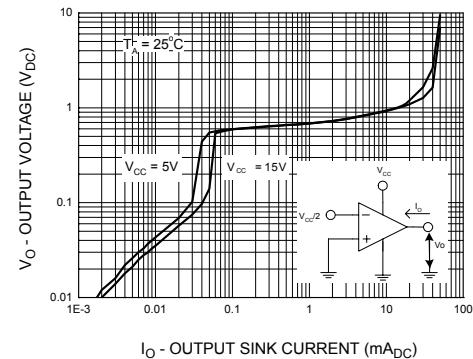


Figure 13. Output Characteristics Current Sinking

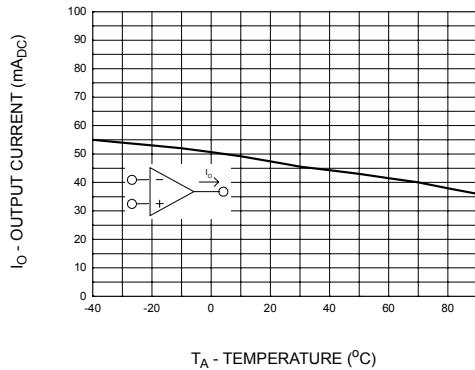


Figure 14. Current Limiting

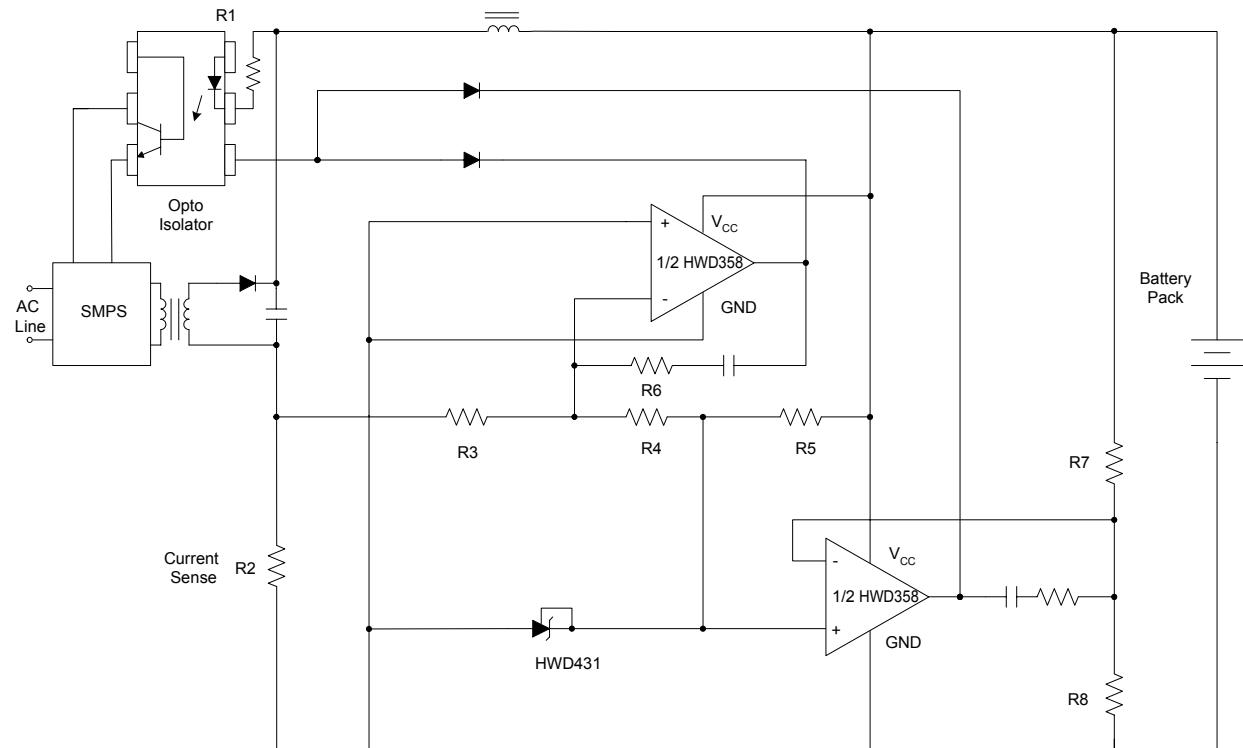
**Typical Application**

Figure 15. Battery Charger

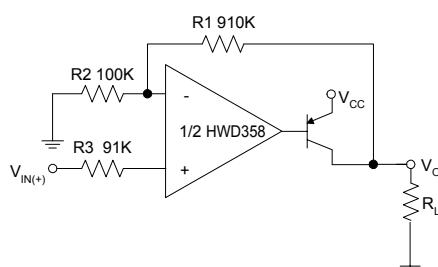


Figure 16. Power Amplifier

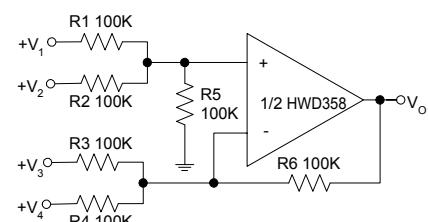


Figure 17. DC Summing Amplifier

## Typical Application (Continued)

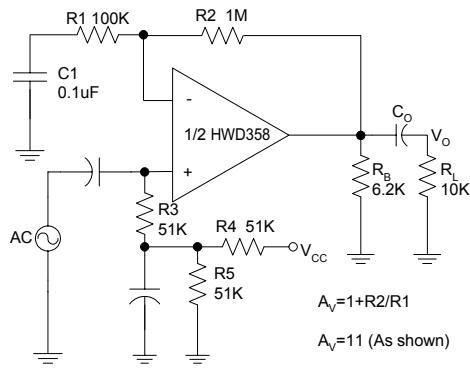


Figure 18. AC Coupled Non-Inverting Amplifier

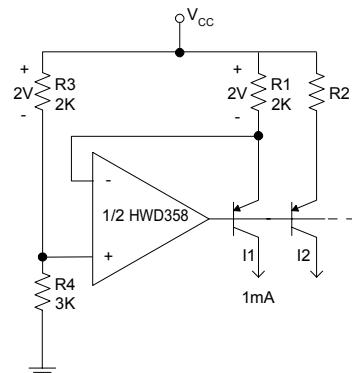


Figure 19. Fixed Current Sources

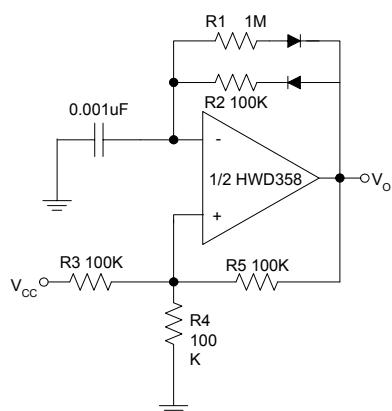


Figure 20. Pulse Generator




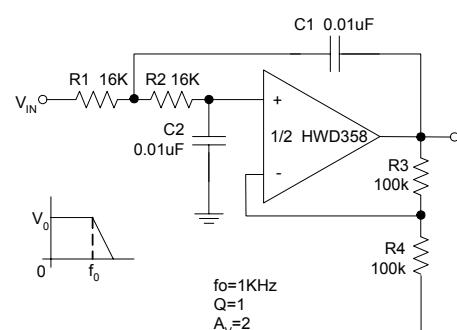


Figure 21. DC Coupled Low-Pass Active Filter

**Mechanical Dimensions**

**DIP-8**

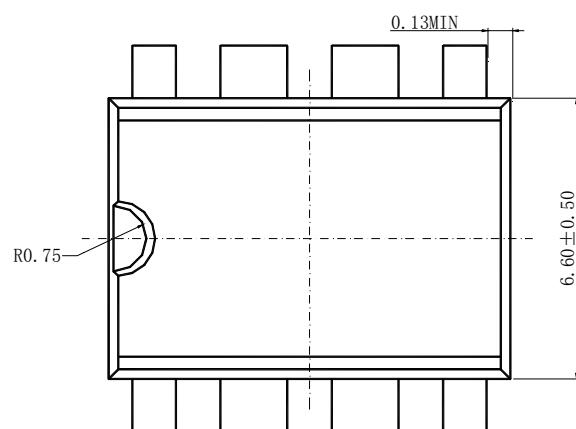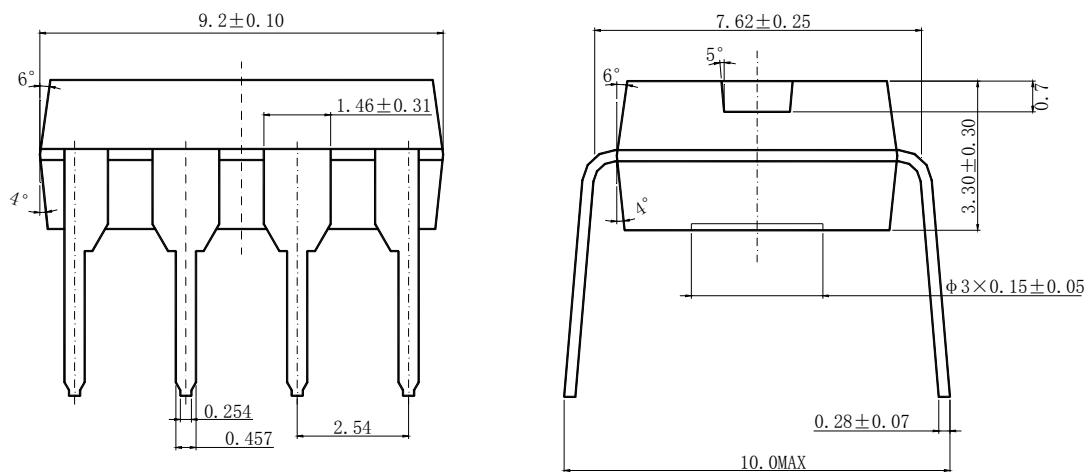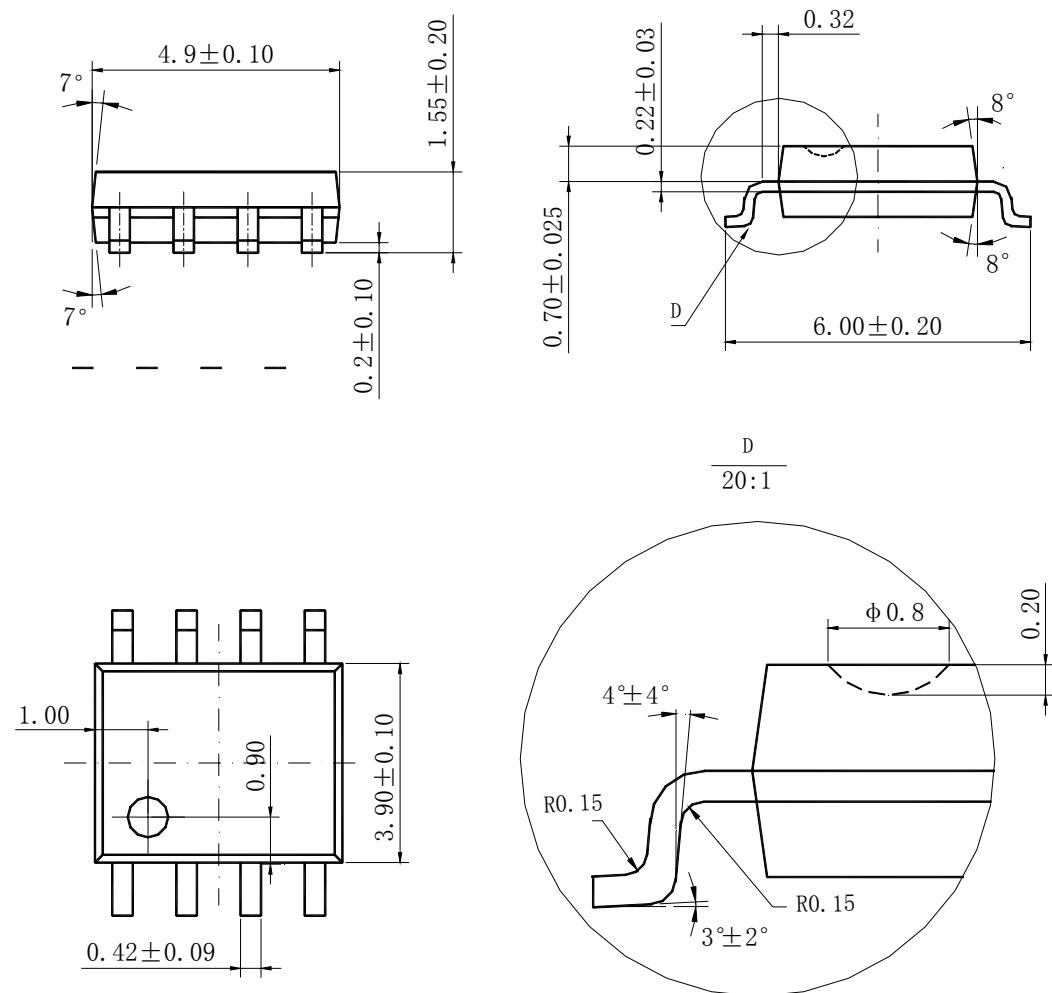

**Mechanical Dimensions (Continued)****SOIC-8**

---

## **Chengdu Sino Microelectronics System Co.,Ltd**

([Http://www.csmsc.com](http://www.csmsc.com))



### **Headquarters of CSMSC**

Address: 2<sup>nd</sup> floor, Building D,  
Science & Technology  
Industrial Park, 11 Gaopeng  
Avenue, Chengdu High-Tech  
Zone, Chengdu City, Sichuan  
Province, P.R.China

PC: 610041

Tel: +86-28-8517-7737

Fax: +86-28-8517-5097

### **Shenzhen Office:**

Address: Room 1110-1112, Building  
A, Zhongshen Garden,  
Caitian Rd., Futian District,  
Shenzhen, P.R.China

PC: 518000

Tel: +86-775-8299-5768

+86-775-8299-2622

Fax: +86-775-8299-6142

+86-775-8299-1022

### **Beijing Office:**

Address: Room 505, No. 6 Building,  
Zijin Garden, 68 Wanquanhe  
Rd., Haidian District,  
Beijing, P.R.China

PC: 100000

Tel: +86-10-8265-8662

Fax: +86-10-8265-8663

### **Shanghai Office:**

Address: Room B-906, High-Tech  
King World, Beijing East  
Rd., Shanghai, P.R.China

PC: 200001

Tel: +86-21-5308-2272 ext. 210

+86-21-5308-2273 ext. 210

Fax: +86-21-5308-2863