


NJM022

The NJM022 is a dual low-power operational amplifier which was designed to replace higher-power devices in many applications without sacrificing system performance. High input impedance, low supply currents, and low equivalent input noise voltage over a wide range of operating supply voltages result in an extremely versatile operational amplifier for use in a variety of analog applications including battery-operated circuit. Internal frequency compensation, absence of latch-up, high slew rate, and output short-circuit protection assure ease of use.

2

■ Absolute Maximum Ratings (Ta=25°C)

Supply Voltage	V ⁺ /V ⁻	±18V
Input Voltage (note)	V _{IC}	±15V
Differential Input Voltage	V _{ID}	±30V
Power Dissipation	P _D (D-Type) (M,E-Type) (L-Type)	500mW 300mW 800mW
Operating Temperature Range	T _{opr}	-20~+75°C
Storage Temperature Range	T _{stg}	-40~+125°C

■ Package Outline


NJM022D



NJM022M



NJM022E



NJM022L


(note) For supply voltage less than ±15V, the absolute maximum input voltage is equal to the supply voltage.

■ Recommended Operating Condition


Supply Voltage V⁺/V⁻ ±2~±18V

■ Electrical Characteristics (Ta=25°C, V⁺/V⁻=±15V)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Offset Voltage	V _{IO}	R _S ≤10kΩ	—	1	5	mV
Input Offset Current	I _{IO}	—	—	15	80	nA
Input Bias Current	I _{IB}	—	—	100	250	nA
Large Signal Voltage Gain	A _V	R _L ≥10kΩ, V _O =±10V	60	80	—	dB
Common Mode Rejection Ratio	CMR	R _S ≤10kΩ	60	72	—	dB
Response Time (Rise Time)	t _R	V _{IN} =20mV, R _L =10kΩ, C _L =100pF	—	0.3	—	μs
Slew Rate	SR	V _{IN} =10V, R _L =10kΩ, C _L =100pF	—	0.5	—	V/μs
Input Common Mode Voltage Range	V _{ICM}	—	±12	±13	—	V
Supply Voltage Rejection Ratio	SVR	R _S ≤10kΩ	74	94	—	dB
Equivalent Input Noise Voltage	V _{NI}	A _V =20dB, f=1kHz	—	50	—	nV/√Hz
Short-circuit Output Current	I _{OS}	—	—	±6	—	mA
Quiescent Current	I _{QC}	—	—	130	250	μA

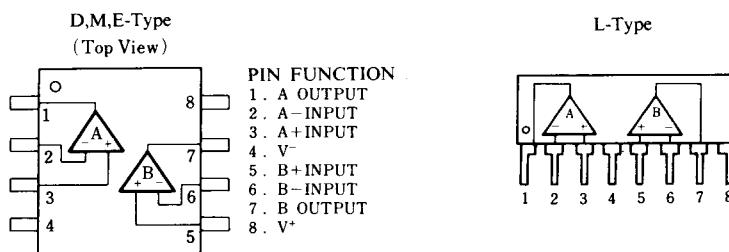
■ Connection Diagram

■ Equivalent Circuit (1/2 Shown)

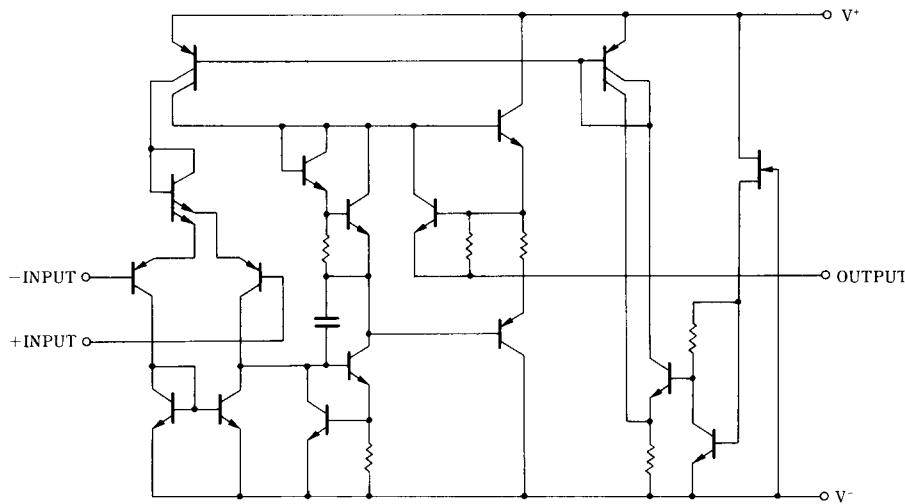


■ Typical Characteristics

Voltage Gain, Phase vs. Frequency

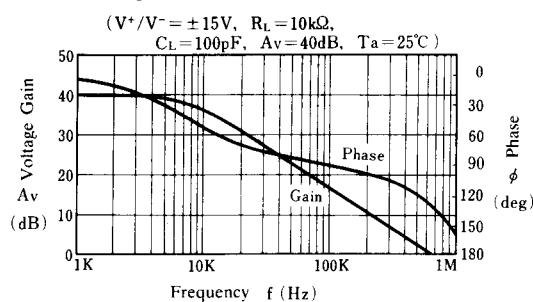


Voltage Gain vs. Temperature

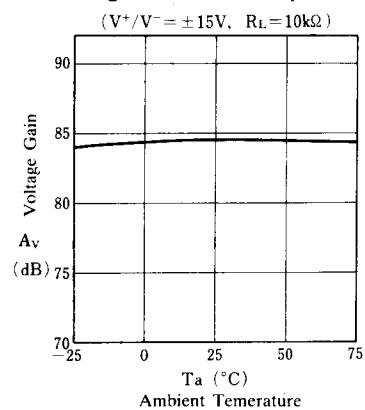


■ Typical Characteristics

Power Dissipation vs. Supply Voltage

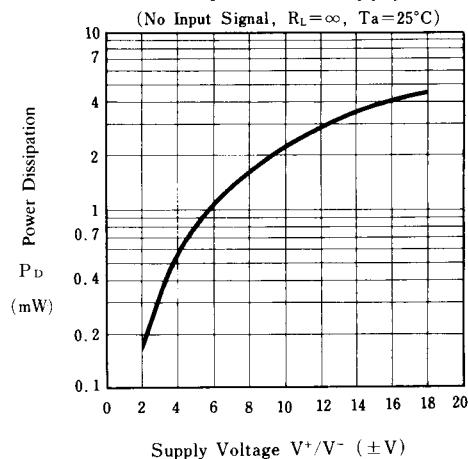


Maximum Output Voltage Swing vs. Frequency

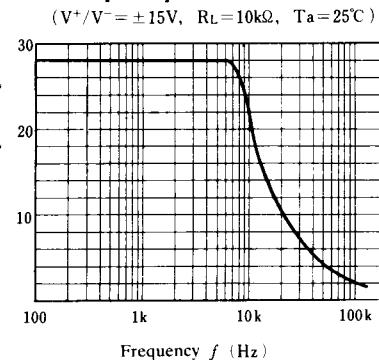


Maximum Output Voltage Swing vs. Supply Voltage

($R_L = 10k\Omega$, $T_a = 25^\circ C$)

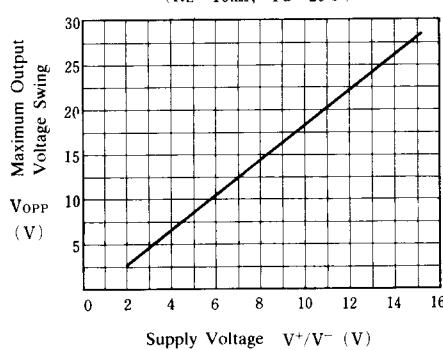

Maximum Output Voltage Swing vs. Load Resistance

($V^+/V^- = \pm 15V$, $T_a = 25^\circ C$)

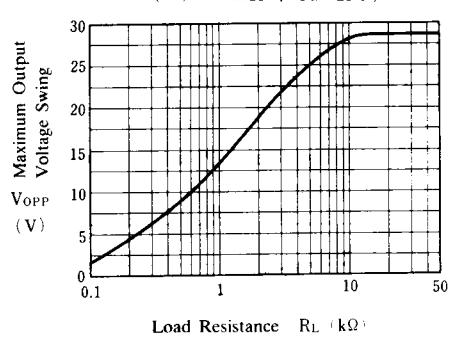

Supply Current vs. Supply Voltage

(No Input Signal, $R_L = \infty$, $T_a = 25^\circ C$)

