

MGA-25203

5.1-5.9GHz 3x3mm WiFi and WiMAX Power Amplifier



Data Sheet

Description


Avago Technologies MGA-25203 linear power amplifier is designed for mobile and fixed wireless data applications in the 5.1 to 5.9 GHz frequency ranges. The PA is optimized for IEEE 802.11a/b/g/n WLAN and 802.16 WiMAX applications. The PA exhibits flat gain and good match while providing linear power efficiency to meet stringent mask conditions. It utilizes Avago Technologies proprietary GaAs Enhancement-mode pHEMT technology for superior performance across voltage and temperature levels.

The MGA-25203 is packaged in a 3x3x1 mm size for space-constrained applications.

Applications

- Portable WiFi and WiMAX applications
- WiFi and WiMAX Access points

Functional Block Diagram

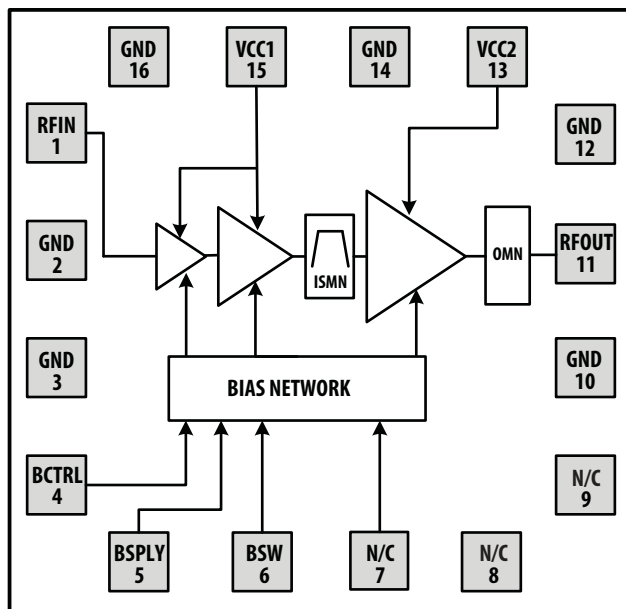


Features

- Advanced GaAs E-pHEMT
- 50 Ω all RF ports
- Full performance across entire 5.1-5.9GHz
- Operates from 4.9-5.9 GHz
- Integrated CMOS compatible pins for shutdown
- 3 to 5V supply
- ESD protection all ports above 1000V HBM
- Small size: 3 x 3 x 1 mm
- Stable under all loads or conditions
- -40°C to +85°C operation

At 5.4GHz

- Meets all IEEE 802.11n masks at 23 dBm Pout with 3.3V and 450mA
- EVM of -34dB (2.0%) at 64QAM, 54Mbps @ Pout of 23dBm
- Gain of 30dB
- PAE of 13%

Package Diagram

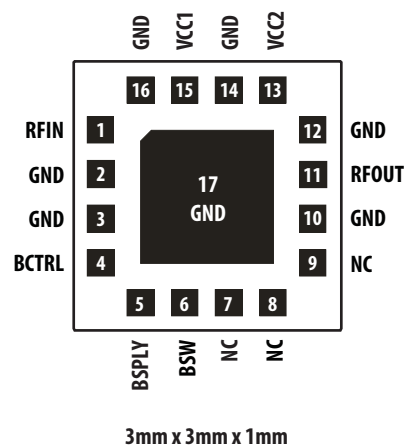

ELECTRICAL SPECIFICATIONS

Absolute Minimum and Maximum Ratings

Table 1. Minimum and Maximum Ratings

Parameter		Specifications				Comments
Description	Pin	Min.	Typical	Max.	Unit	
Supply Voltage	VCC1 VCC2		3.3	5.5	V	
Bias Supply	BSPLY		3.3	4.2	V	
Bias Control	BCTRL		2.8	4.2	V	
Bias ON/OFF	BSW		1.8	4.2	V	
Mode Control	PAMODE		1.8	4.2	V	
RF Input Power	RFIN			15	V	Using 16QAM 3/4
MSL				MSL3		
Channel Temperature				150	°C	
Storage Temperature		-65		150	°C	
ESD	Human Body Model			1000	V	
	Man Machine Model			100	V	

Table 2. Operating Range

Parameter		Specifications				Comments
Description	Pin	Min.	Typical	Max.	Unit	
Supply Voltage	VCC1 VCC2	3	3.3	5	V	
Bias Supply	BSPLY	3	3.3	3.5	V	
			20	mA		
Bias Control	BCTRL	2.75	2.8	2.85	V	
			0.68	uA		
Bias ON/OFF	BSW	1.65	1.8	2.2	V	
			36	uA		
Mode Control	PAMODE				uA	NO low power mode
RF Output Power	RFOUT			23	dBm	Using 16QAM 3/4
Frequency Range		5.1		5.9	GHz	
Thermal Resistance, θ_{ch-b}			23.4		°C/W	Channel to board
Case Temperature		-40		+85	°C	

WLAN (802.11 a) Electrical Specifications

All data measured on an FR4 demo board at $V_{cc1} = V_{cc2} = 3.3V$, $T_c = 25^\circ C$, 50Ω at all ports. Unless otherwise specified, all data is taken at 54Mbps 64QAM modulated signal per IEEE 802.11g with 20MHz BW at 4.9 - 5.9GHz. This module is intended for frequency band 5.1-5.9GHz. The following data from 4.9 to 5.1GHz shows that the PA is fully functional with degraded performance.

Table 3. RF Electrical Characteristics

Parameter	Performance				Comments	
	Min.	Typical	Max.	Unit		
Input Return Loss	-	-8	-	dB		
Gain Flatness	-	1	-	dB	Over any 20MHz	
Gain Variation (V_{CC})	-1	-	1	dB	3V to 5V	
5.4-5.9 GHz	EVM	-	-32	-30	dB	$V_{cc}=3.3V$
		-	-36	-32	dB	$V_{cc}=5.0V$
	Pout, SEM Compliant	+23	-	-	dBm	IEEE 802.11g
	Total DC Current	-	410	-	mA	Pout=23dBm
	Gain	27	30	33	dB	
5.1-5.3 GHz	EVM	-	-30	-	dB	$V_{cc}=3.3V$
		-	-32	-	dB	$V_{cc}=5.0V$
	Pout, SEM Compliant	+23	-	-	dBm	IEEE 802.11g
	Total DC Current	-	443	-	mA	Pout=23dBm
	Gain	-	27	-	dB	
4.9-5.0 GHz	EVM	-	-26	-	dB	$V_{cc}=3.3V$
		-	-28	-	dB	$V_{cc}=5.0V$
	Pout, SEM Compliant	-	22	-	dBm	IEEE 802.11g
	Total DC Current	-	468	-	mA	Pout=23dBm
	Gain	-	23	-	dB	
P1dB	-	29	-	dBm	CW Single Tone	
Psat	-	30	-	dBm	CW Single Tone	
Settling Time	0.2	0.5	-	uS		
Icc leakage current	-	10	40	uA		

Selected performance plots

5.4 – 5.9GHz

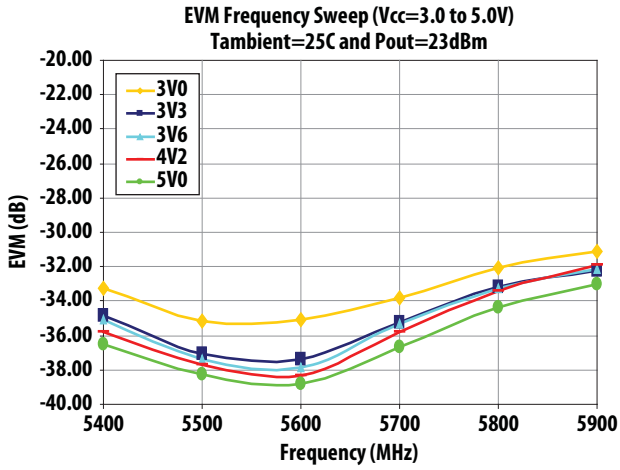


Figure 1. EVM Frequency Sweep at 25C and Pout=23dBm over Vcc

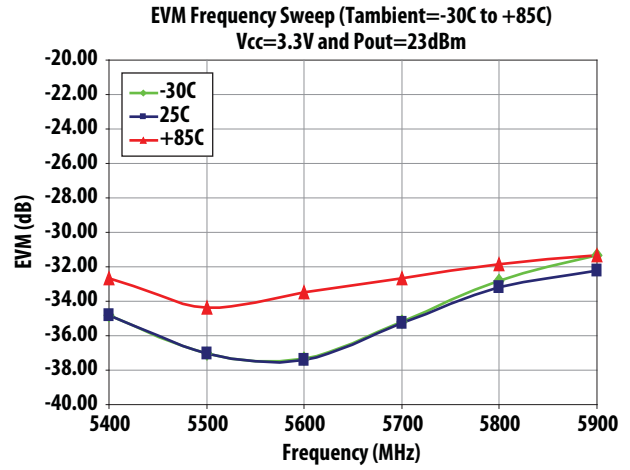


Figure 2. EVM Frequency Sweep at Vcc=3.3V and Pout=23dBm over Tambient

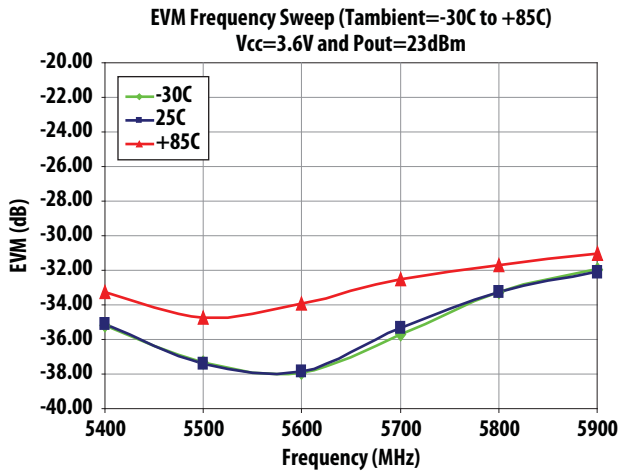


Figure 3. EVM Frequency Sweep at Vcc=3.6V and Pout=23dBm over Tambient

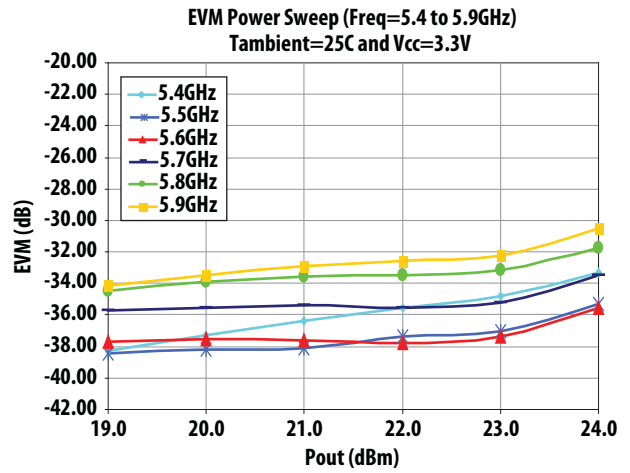


Figure 4. EVM Power Sweep at Vcc=3.3V and 25C over Frequency

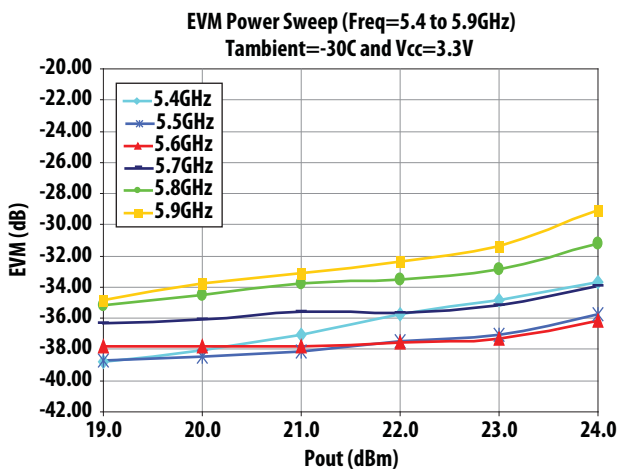


Figure 5. EVM Power Sweep at Vcc=3.3V and -30C over Frequency

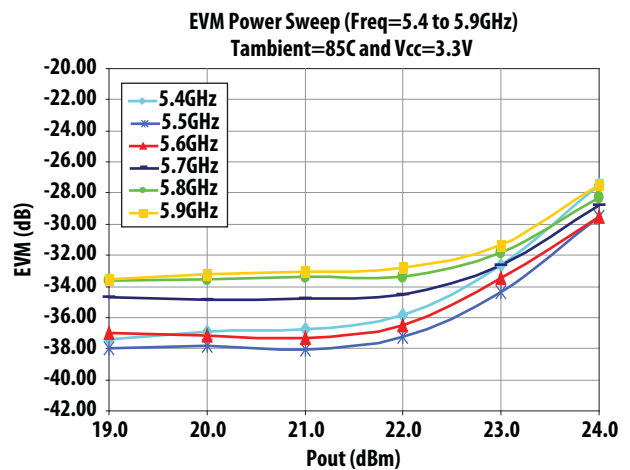


Figure 6. EVM Power Sweep at Vcc=3.3V and +85C over Frequency

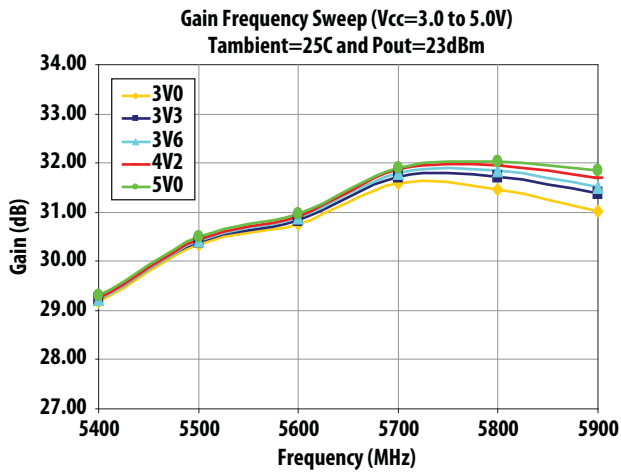


Figure 7. Gain Frequency Sweep at 25C and Pout=25dBm over Vcc

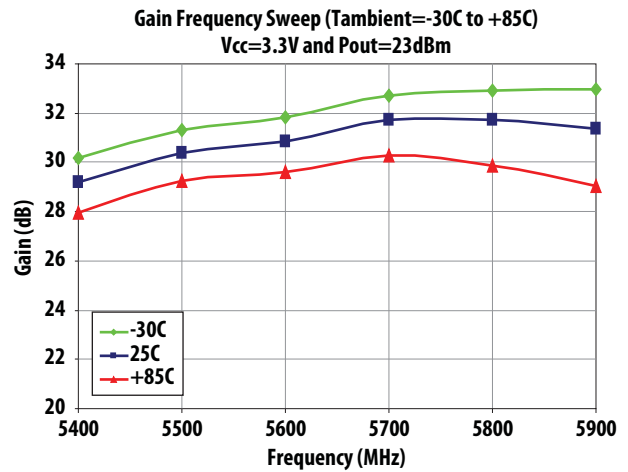


Figure 8. Gain Frequency Sweep at Vcc=3.3V and Pout=25dBm over Tambient

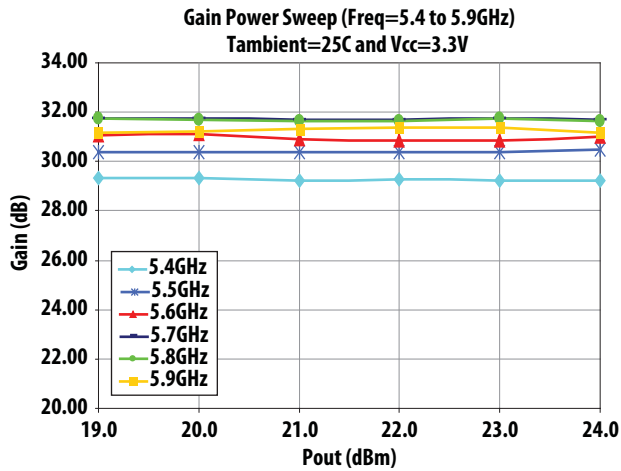


Figure 9. Gain Power Sweep at Vcc=3.3V and 25C over Frequency

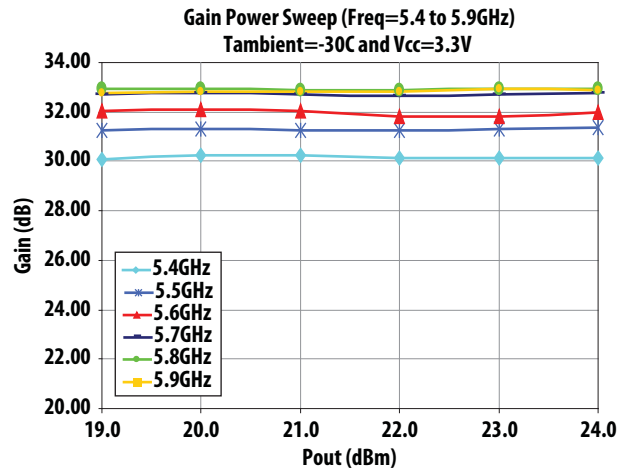


Figure 10. Gain Power Sweep at Vcc=3.3V and -30C over Frequency

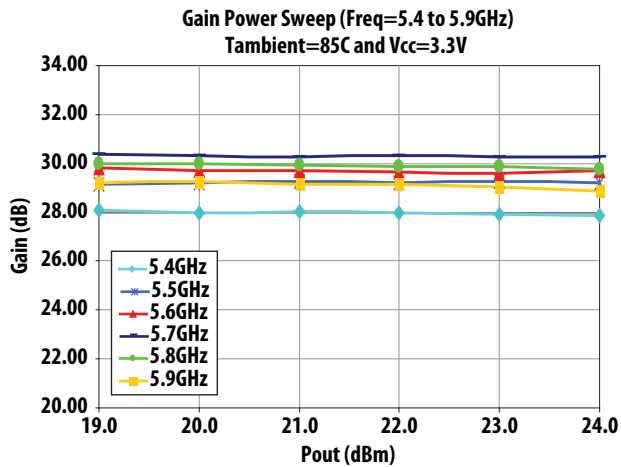


Figure 11. Gain Power Sweep at Vcc=3.3V and +85C over Frequency

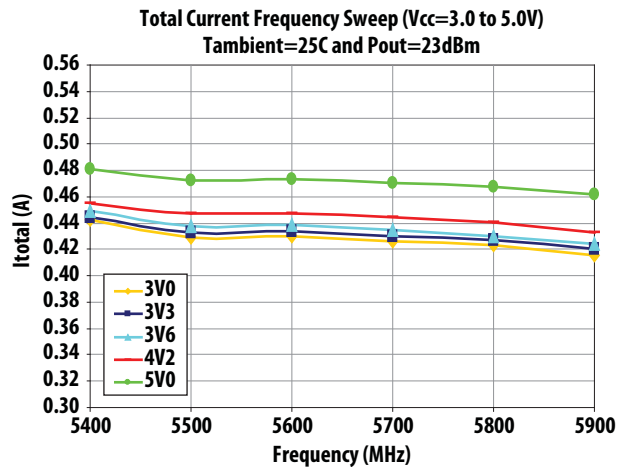


Figure 12. Total Current Frequency Sweep at 25C and Pout=25dBm over Vcc

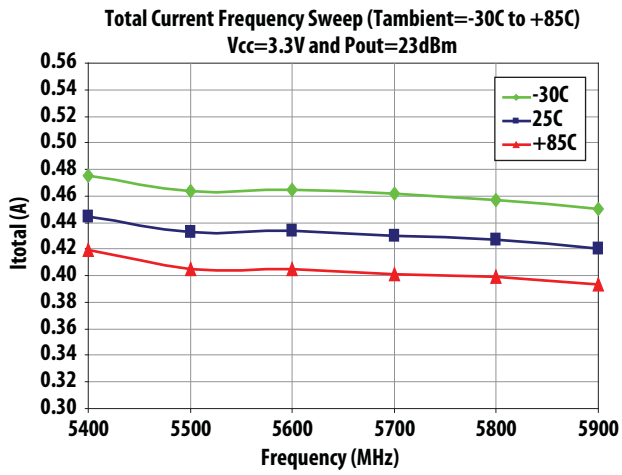


Figure 13. Total Current Frequency Sweep at 3.3V and Pout=23dBm over Tambient

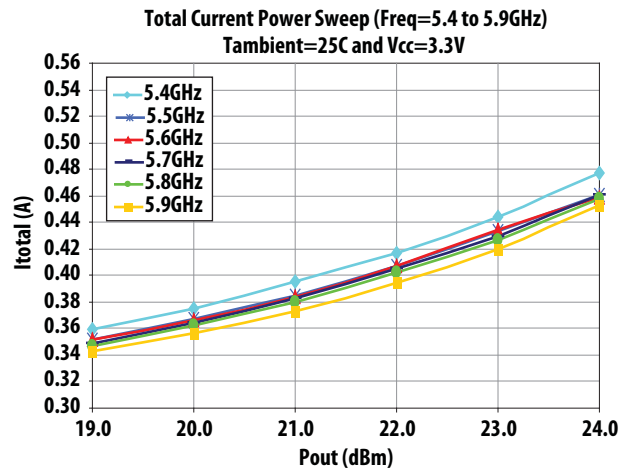


Figure 14. Total Current Power Sweep at 3.3V and 25C over Frequency

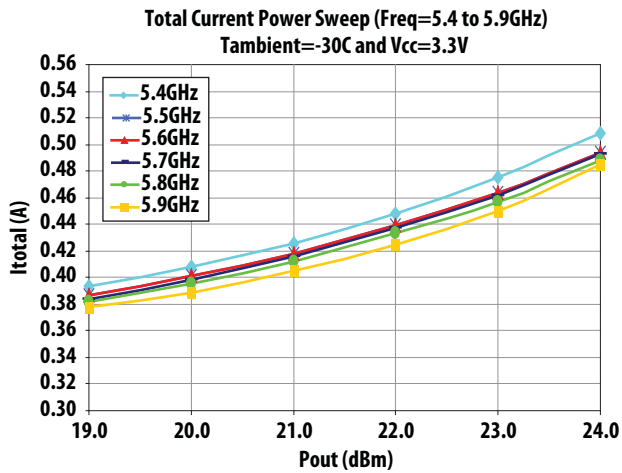


Figure 15. Total Current Power Sweep at 3.3V and -30C over Frequency

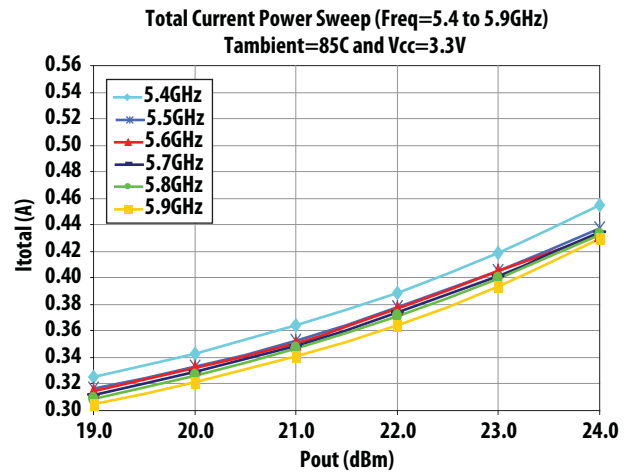


Figure 16. Total Current Power Sweep at 3.3V and +85C over Frequency

4.9 – 5.3GHz

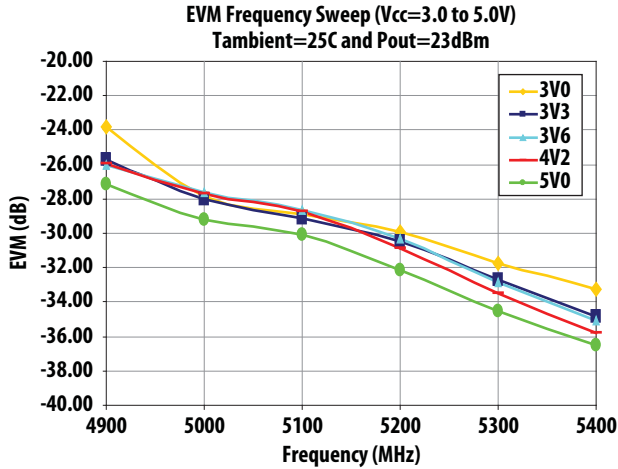


Figure 17. EVM Frequency Sweep at 25C and Pout=23dBm over Vcc

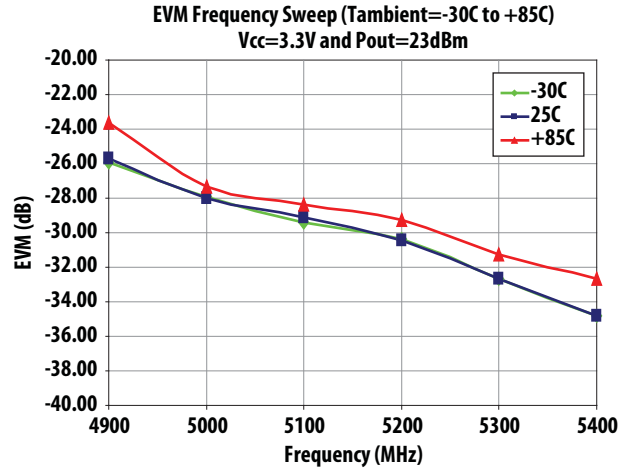


Figure 18. EVM Frequency Sweep at Vcc=3.3V and Pout=23dBm over Tambient

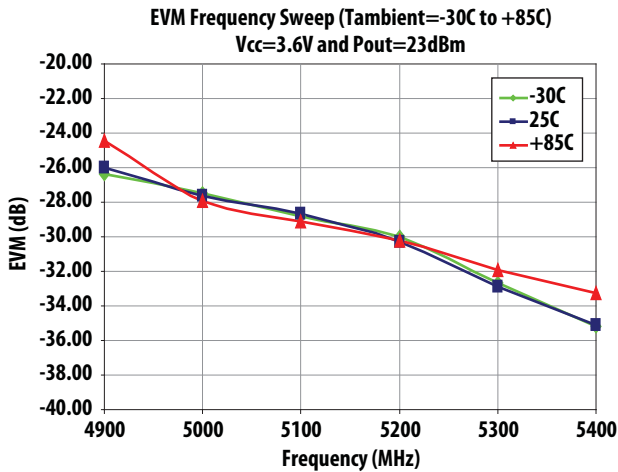


Figure 19. EVM Frequency Sweep at Vcc=3.6V and Pout=23dBm over Tambient

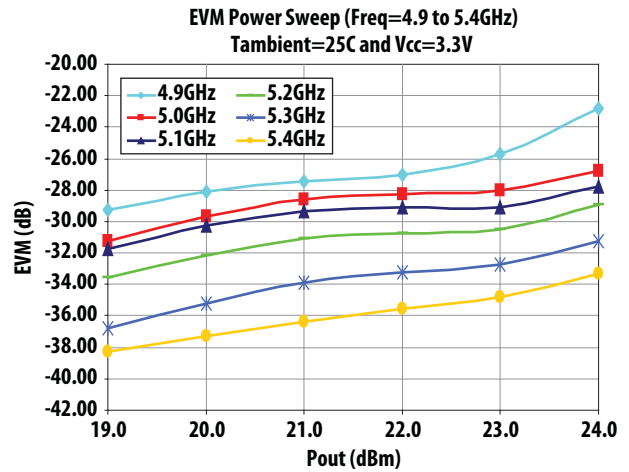


Figure 20. EVM Power Sweep at Vcc=3.3V and 25C over Frequency

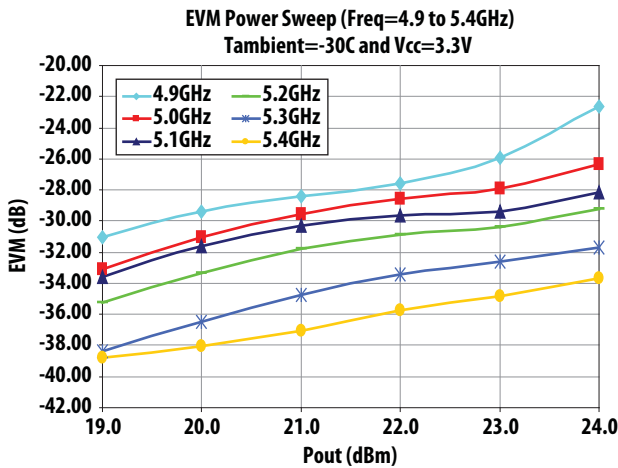


Figure 21. EVM Power Sweep at Vcc=3.3V and -30C over Frequency

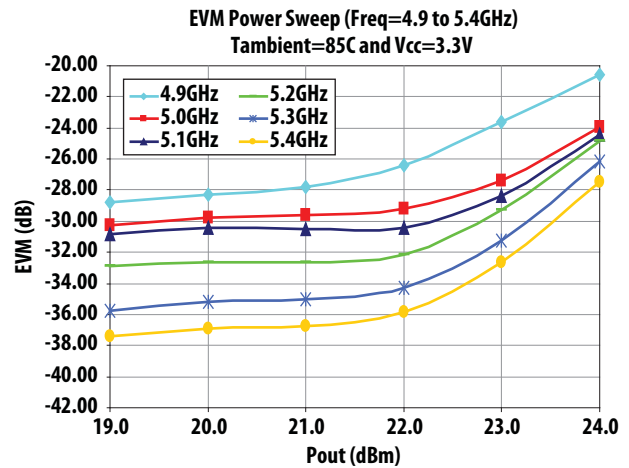


Figure 22. EVM Power Sweep at Vcc=3.3V and +85C over Frequency

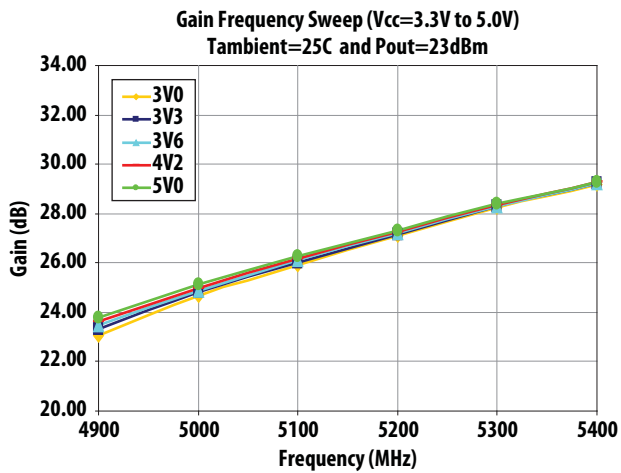


Figure 23. Gain Frequency Sweep at 25C and Pout=25dBm over Vcc

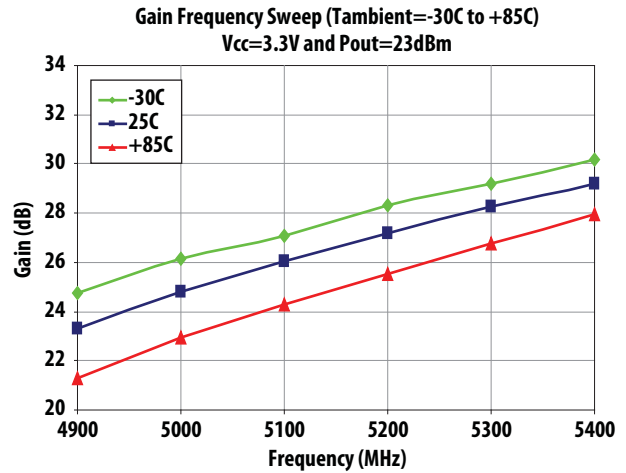


Figure 24. Gain Frequency Sweep at Vcc=3.3V and Pout=25dBm over Tambient

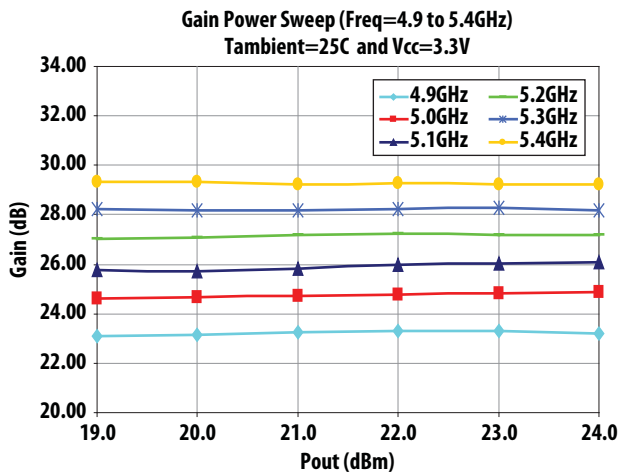


Figure 25. Gain Power Sweep at Vcc=3.3V and 25C over Frequency

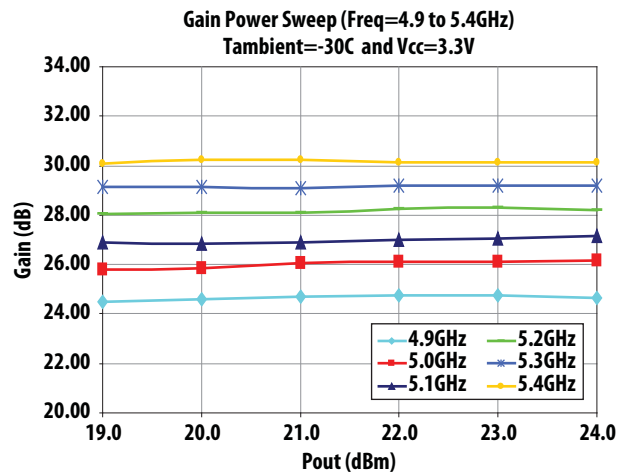


Figure 26. Gain Power Sweep at Vcc=3.3V and -30C over Frequency

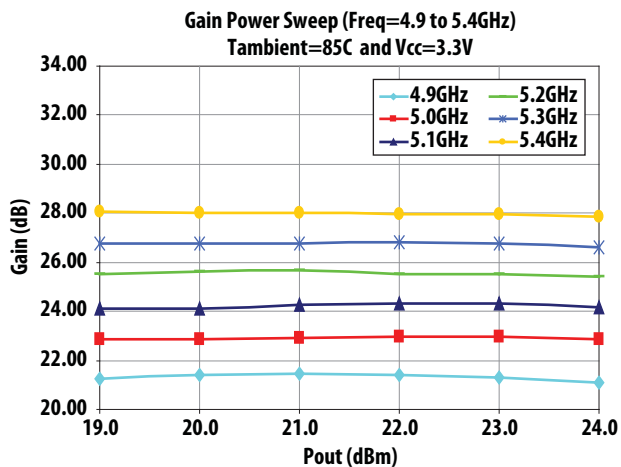


Figure 27. Gain Power Sweep at Vcc=3.3V and +85C over Frequency

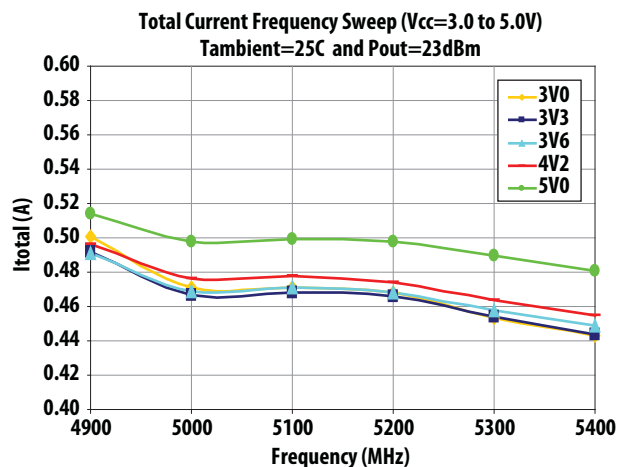


Figure 28. Total Current Frequency Sweep at 25C and Pout=25dBm over Vcc

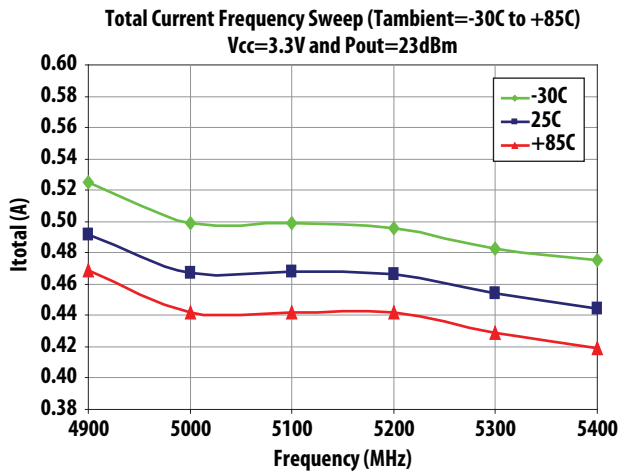


Figure 29. Total Current Frequency Sweep at 3.3V and Pout=25dBm over Tambient

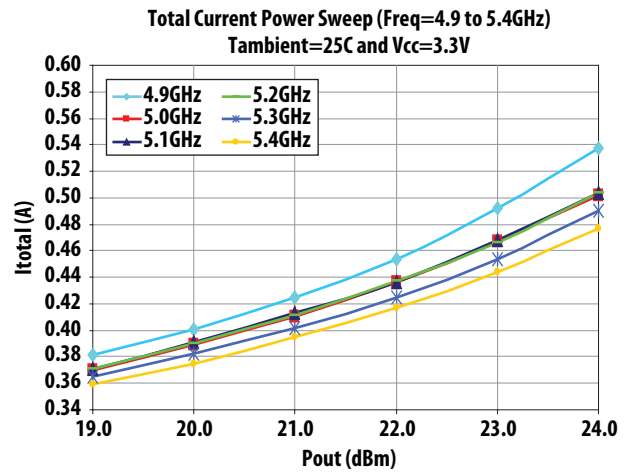


Figure 30. Total Current Power Sweep at 3.3V and 25C over Frequency

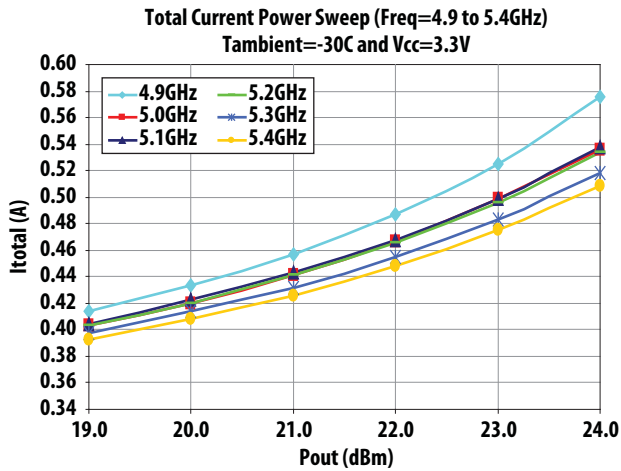


Figure 31. Total Current Power Sweep at 3.3V and -30C over Frequency

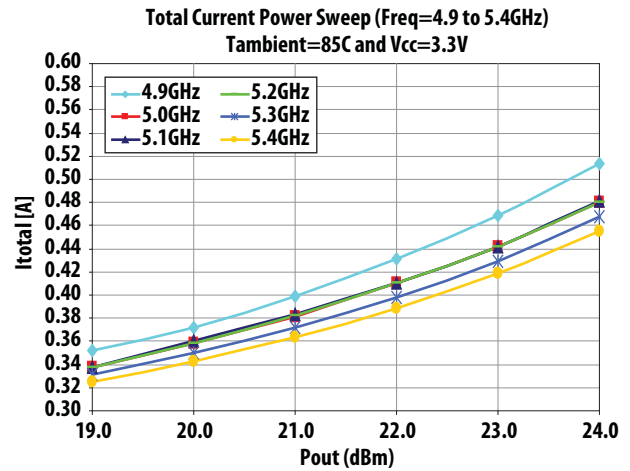


Figure 32. Total Current Power Sweep at 3.3V and +85C over Frequency

Evaluation Board Description

Table 4. Pin Description

Top Pin No.	Function	Bottom Pin No.	Function
1	VCC2	2	VCC2_S
3	B_SPLY	4	GND
5	VCC1	6	GND
7	NC	8	GND
9	NC	10	GND
11	NC	12	GND
13	NC	14	B_SW
15	B_CTRL	16	GND
17	NC	18	GND
19	NC	20	GND

Recommended turn on sequence

- Apply VCC1 and VCC2 3.3V
- Apply BSPLY 3.3V
- Apply BCTRL 2.8V
- Apply BSW 1.8V
- Apply RF In, not to exceed 15dBm

Table 5. Typical Test Conditions


Pin	HPM	Description
VCC1,2	3.3V	Supply Voltage
B_SPLY	3.3V	Bias Voltage
B_CTRL	2.8V	Bias Control
B_SW	1.8V	PA Enable

Notes: VCC1, VCC2 and B_SPLY can be tied together to reduce supply voltages, but B_CTRL needs to be a regulated voltage which is optimized for 2.8V.


Demoboard Top Pins




Demoboard Bottom Pins

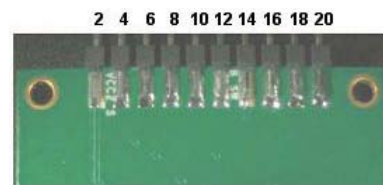

Application Circuit MGA-25203

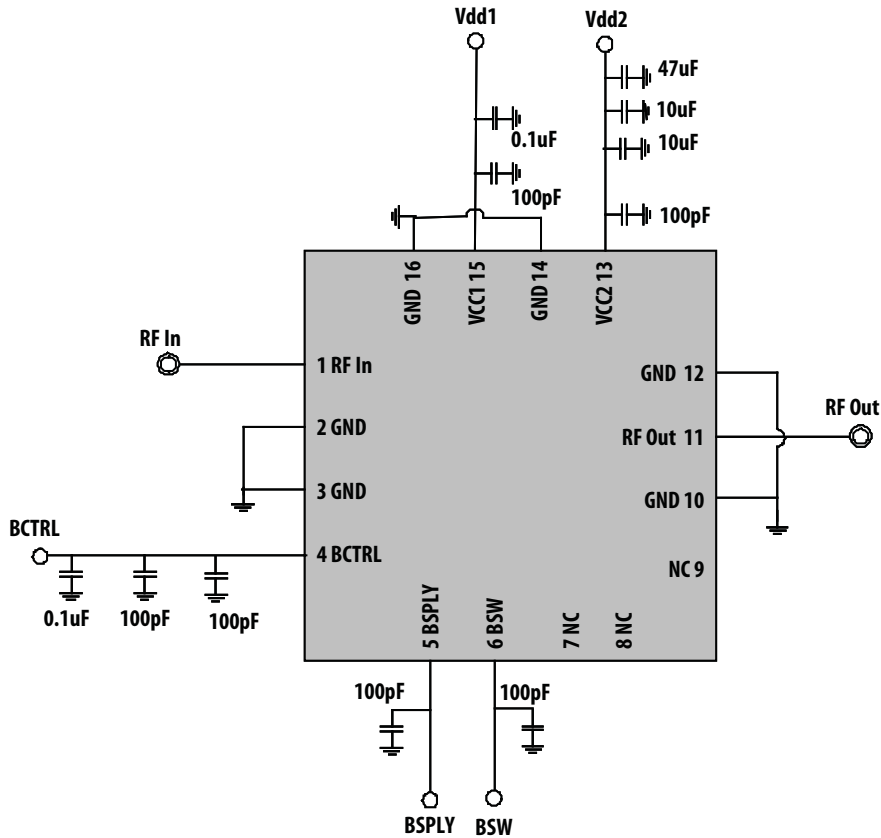

Using 3.3V or 5V Supply and connecting Vcc1, Vcc2, BSPLY and BCTRL

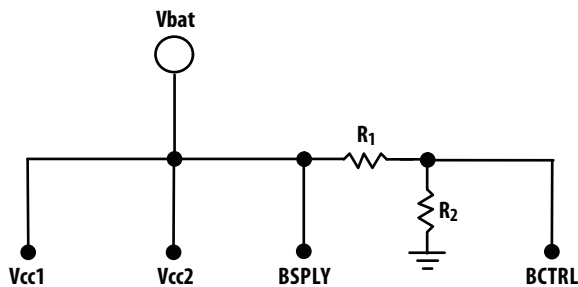

Notes: BCTRL regulates the device current, thus R1 and R2 should have good tolerance rating. If available, a voltage regulator is the preferred method of bias.

In this example we set R2 at 10MΩ and solve for R1 with simple voltage divider equation. Use high resistance values to limit leakage current.

3.3V Example :

$$V_{BCTRL} = \frac{R_2}{R_1 + R_2} * V_{BATT}$$

$$2.85V = \frac{10M\Omega}{R_1 + 10M\Omega} * 3.3V$$

$$R_1 = 1.58M\Omega$$

$$R_2 = 10M\Omega$$

Given :

$$V_{BCTRL} = 2.85V$$

$$V_{BAT} = 3.3V$$

$$R_2 = 10M$$

$$R_1 = ?$$

5.0V Example :

$$V_{BCTRL} = \frac{R_2}{R_1 + R_2} * V_{BATT}$$

$$2.85V = \frac{10M\Omega}{R_1 + 10M\Omega} * 5.0V$$

$$R_1 = 7.54M\Omega$$

$$R_2 = 10M\Omega$$

Given :

$$V_{BCTRL} = 2.85V$$

$$V_{BAT} = 5.0V$$

$$R_2 = 10M$$

$$R_1 = ?$$

Land Pattern

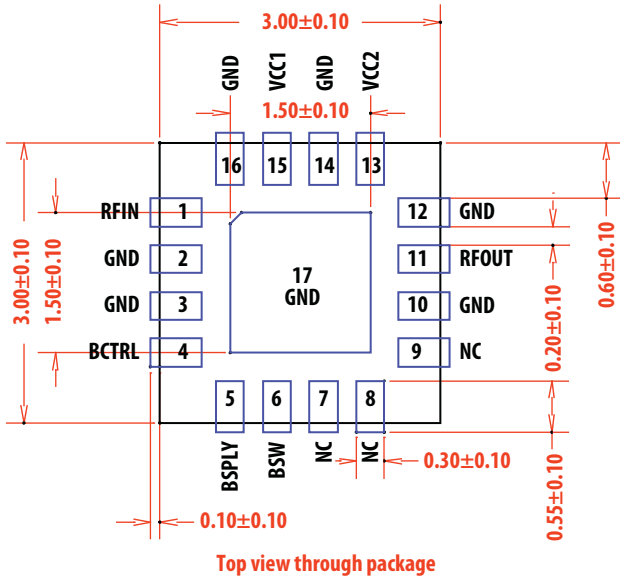


Figure 33. Recommended footprint

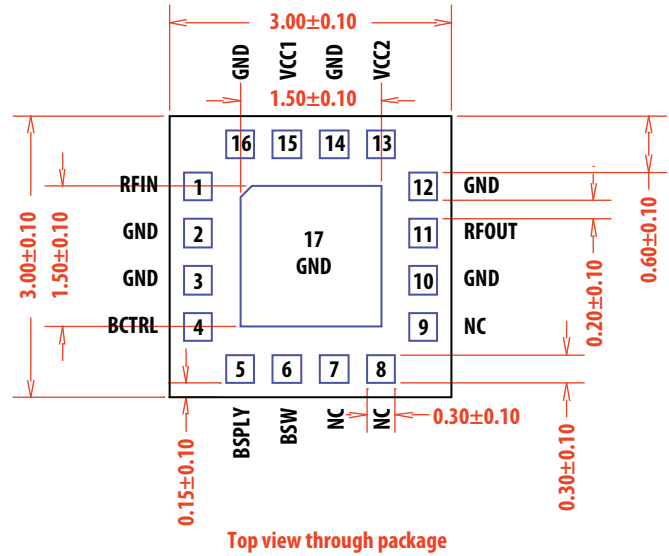


Figure 34. Package dimensions

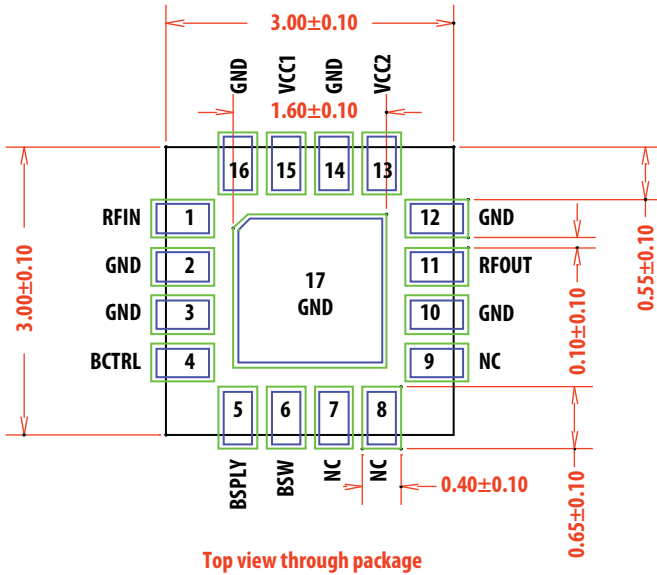


Figure 35. Recommended mask opening




- Notes:
1. All units are in millimeters
 2. Package is symmetrical

Ordering Information

Part Number	No. of Devices	Container
MGA-25203-BLK	100	Antistatic Bag
MGA-25203-TR1	3000	7" Reel
MGA-25203-TR2	7000	13" Reel

Size	12mm
A	330 ^{+2.0} _{-2.0}
B	1.5min.
C	13.0 ^{+0.5} _{-0.2}
D	20.2min.
N	100 ^{+3.0} _{-0.0}
W1	12.4 ^{+3.0} _{-0.0}
W2	16.4 ^{+2.0} _{-2.0}
W3	13.65 ^{+1.75} _{-0.75}

Tape and Reel Information

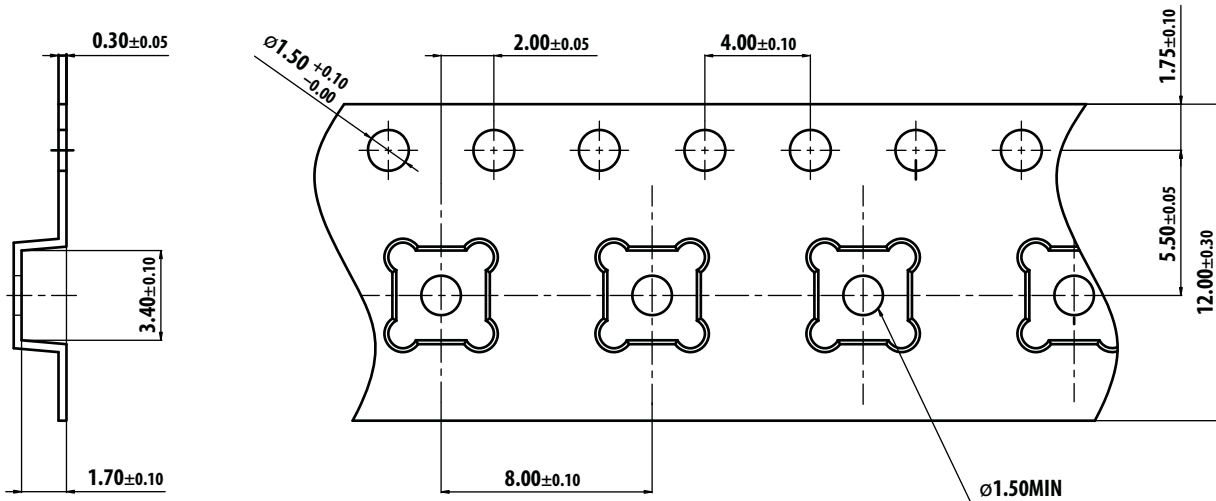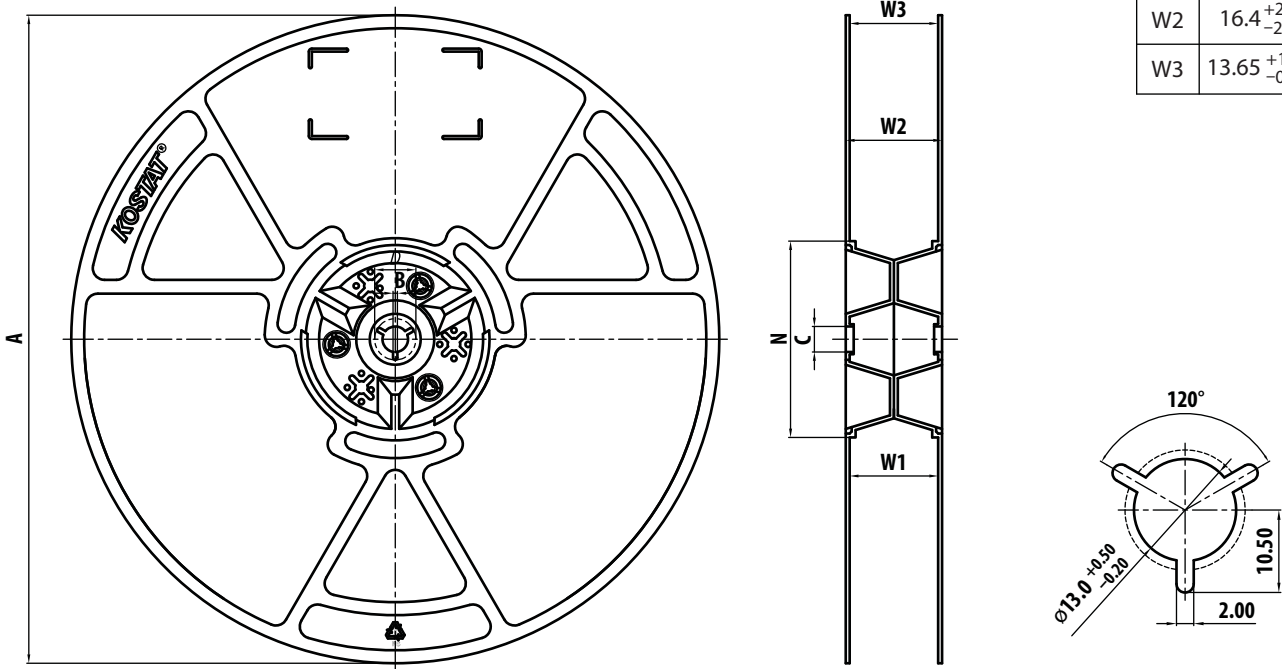

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries.
Data subject to change. Copyright © 2005-2009 Avago Technologies. All rights reserved.
AV02-1961EN - January 15, 2010

