


T H E R M O M E T R I C S
A C O M M I T M E N T T O E X C E L L E N C E

A-1737 Motor Coil Temperature Sensor

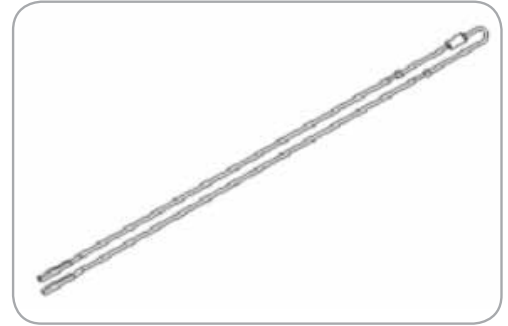

This sensor is used on a starter generator to provide temperature measurement of the motor coil. Typically mounted on the neutral bar, it detects increases in current that would indicate a failure that could lead to a stall. The sensor can also be used to monitor the motor windings temperature and warn of an over-temperature condition.

Applications

- EV / HEV motor coil
- HVACR motor protection
- Industrial automation and control

Features

- High accuracy and long term stability
- Existing field proven design
- Weld connections covered by PTFE Heat Shrink
- Meets the temperature and vibration demands of EV and HEV traction motors
- Alternate RvT (resistance versus temperature) curves available
- Custom packages available to meet various motor configurations.
- A variety of terminal and connector options

Amphenol
Advanced Sensors

Specifications

R @ 25°C

30,000 ohms ±5%

R @ 210°C

155.45 ohms ±11.5%

B (25/85)

3974

Operating Temperature Range

-40°C to 210°C

Storage Temperature Range

-40°C to 225°C

Temperature Accuracy

1.53°C at -40°C

1.25°C at 25°C

6.23°C at 210°C

Response time

7 seconds liquid to liquid

Housing Material

Axial leaded glass NTC thermistor

Terminal

Molex Terminal 33011-3001

NTC Part Number


AL03006-17.53-98-G2

Weight

2 grams

Ordering Code

A-1737

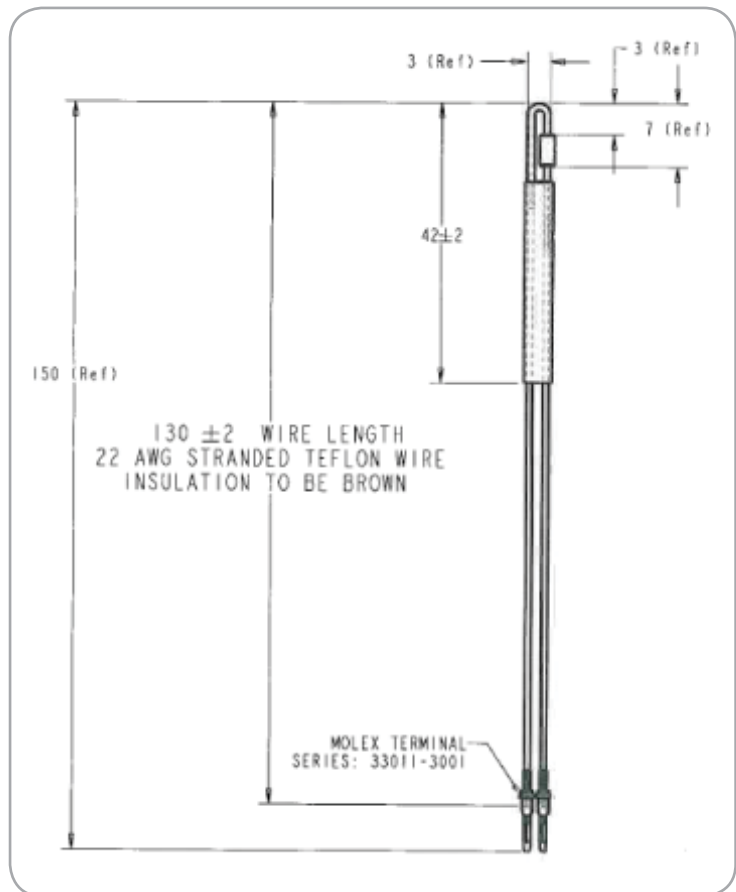

Resistance vs. Temperature Data

Resistance = 30000 Ohms at 25 °C Rtol. @ 25°C 5.0%

Temp. (°C)	Rnominal (ohms)	Res. Tol. ±%	Rmin. (Ohms)	Rmax. (Ohms)
-40.00	965,530	10.0	869,073	1,061,986
0	96,248	6.5	89,982	102,504
20	37,386	5.3	35,409	39,365
25	30,000	5.0	28,500	31,500
50	10,851	6.4	10,154	11,548
175	310.05	10.7	276.93	343.16
210	155.40	11.5	137.60	173.30

Amphenol
Advanced Sensors

www.amphenol-sensors.com

© 2015 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.

AAS-920-540B-12/2015