

# LM3303,LM3403

*LM3303 LM3403 Quad Operational Amplifiers*



Literature Number: SNVS022A

## LM3303/LM3403 Quad Operational Amplifiers

### General Description

The LM3303 and LM3403 are monolithic quad operational amplifiers consisting of four independent high gain, internally frequency compensated, operational amplifiers designed to operate from a single power supply or dual power supplies over a wide range of voltages. The common mode input range includes the negative supply, thereby eliminating the necessity for external biasing components in many applications.

### Features

- Input common mode voltage range includes ground or negative supply
- Output voltage can swing to ground or negative supply


- Four internally compensated operational amplifiers in a single package
- Wide power supply range single supply of 3.0V to 36V dual supply of  $\pm 1.5V$  to  $\pm 18V$
- Class AB output stage for minimal crossover distortion
- Short circuit protected outputs
- High open loop gain 200k
- LM741 operational amplifier type performance

### Applications

- Filters
- Voltage controlled oscillators

### Connection Diagram

14-Lead DIP and SO-14 Package




Top View

TL/H/10064-1

### Order Information

Device Code	Package Code	Package Description
LM3303J	J14A	Ceramic DIP
LM3303N	N14A	Molded DIP
LM3303M	M14A	Molded Surface Mount
LM3403J	J14A	Ceramic DIP
LM3403N	N14A	Molded DIP
LM3403M	M14A	Molded Surface Mount

### Equivalent Circuit (1/4 of Circuit)

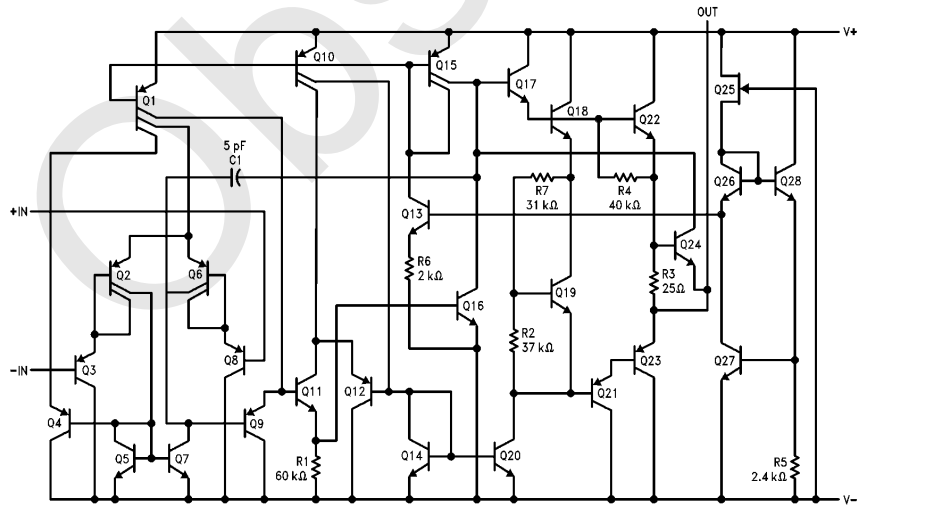

TL/H/10064-2

## Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature Range		
Ceramic DIP		-65°C to +175°C
Molded DIP and SO-14		-65°C to +150°C
Operating Temperature Range		
Industrial (LM3303)		-40°C to +85°C
Commercial (LM3403)		0°C to +70°C
Lead Temperature		
Ceramic DIP (Soldering, 60 sec.)		300°C
Molded DIP and SO-14 (Soldering, 10 sec.)		265°C

Internal Power Dissipation (Notes 1, 2)

14L-Ceramic DIP	1.36W
14L-Molded DIP	1.04W
SO-14	0.93W

Supply Voltage between V+ and V-

36V

Differential Input Voltage (Note 3)

±30V

Input Voltage

(V-) - 0.3V to V+

ESD Tolerance

(To Be Determined)

## LM3303 and LM3403

Electrical Characteristics  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = \pm 15\text{V}$ , unless otherwise specified

Symbol	Parameter	Conditions	LM3303			LM3403			Units
			Min	Typ	Max	Min	Typ	Max	
$V_{IO}$	Input Offset Voltage			2.0	8.0		2.0	8.0	mV
$I_{IO}$	Input Offset Current			30	75		30	50	nA
$I_{IB}$	Input Bias Current			200	500		200	500	nA
$Z_I$	Input Impedance		0.3	1.0		0.3	1.0		M $\Omega$
$I_{CC}$	Supply Current	$V_O = 0\text{V}$ , $R_L = \infty$		2.8	7.0		2.8	7.0	mA
CMR	Common Mode Rejection	$R_S \leq 10\text{ k}\Omega$	70	90		70	90		dB
$V_{IR}$	Input Voltage Range		+12V to V-	+12.5V to V-		+13V to V-	+13.5V to V-		V
PSRR	Power Supply Rejection Ratio			30	150		30	150	$\mu\text{V}/\text{V}$
$I_{OS}$	Output Short Circuit Current (Per Amplifier) (Note 4)		±10	±30	±45	±10	±30	±45	mA
$A_{VS}$	Large Signal Voltage Gain	$V_O = \pm 10\text{V}$ , $R_L \geq 2.0\text{ k}\Omega$	20	200		20	200		V/mV
$V_{OP}$	Output Voltage Swing	$R_L = 10\text{ k}\Omega$	±12	12.5		±12	+13.5		V
		$R_L = 2.0\text{ k}\Omega$	±10	12		±10	±13		
TR	Transient Response	Rise Time/ Fall Time	$V_O = 50\text{ mV}$ , $A_V = 1.0$ , $R_L = 10\text{ k}\Omega$		0.3			0.3	$\mu\text{s}$
		Overshoot	$V_O = 50\text{ mV}$ , $A_V = 1.0$ , $R_L = 10\text{ k}\Omega$		5.0			5.0	%
BW	Bandwidth	$V_O = 50\text{ mV}$ , $A_V = 1.0$ , $R_L = 10\text{ k}\Omega$		1.0			1.0		MHz
SR	Slew Rate	$V_I = -10\text{V}$ to $+10\text{V}$ , $A_V = 1.0$		0.6			0.6		V/ $\mu\text{s}$

### LM3303 and LM3403 (Continued)

Electrical Characteristics  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = \pm 15\text{V}$ , unless otherwise specified

The following specifications apply for  $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$  for the LM3303, and  $0^\circ\text{C} \leq T_A \leq +70^\circ\text{C}$  for the LM3403

Symbol	Parameter	Conditions	LM3303			LM3403			Units
			Min	Typ	Max	Min	Typ	Max	
$V_{IO}$	Input Offset Voltage				10			10	mV
$\Delta V_{IO}/\Delta T$	Input Offset Voltage Temperature Sensitivity			10			10		$\mu\text{V}/^\circ\text{C}$
$I_{IO}$	Input Offset Current				250			200	nA
$\Delta I_{IO}/\Delta T$	Input Offset Current Temperature Sensitivity			50			50		$\text{pA}/^\circ\text{C}$
$I_{IB}$	Input Bias Current				1000			800	nA
$A_{VS}$	Large Signal Voltage Gain	$V_O = \pm 10\text{V}$ , $R_L \geq 2.0\text{ k}\Omega$	15			15			V/mV
$V_{OP}$	Output Voltage Swing	$R_L = 2.0\text{ k}\Omega$	$\pm 10$			$\pm 10$			V

### LM3303 and LM3403

Electrical Characteristics  $T_A = 25^\circ\text{C}$ ,  $V_+ = 5.0\text{V}$ ,  $V_- = \text{GND}$ , unless otherwise specified

Symbol	Parameter	Conditions	LM3303			LM3403			Units
			Min	Typ	Max	Min	Typ	Max	
$V_{IO}$	Input Offset Voltage				8.0		2.0	8.0	mV
$I_{IO}$	Input Offset Current				75		30	50	nA
$I_{IB}$	Input Bias Current				500		200	500	nA
$I_{CC}$	Supply Current			2.5	7.0		2.5	7.0	mA
PSRR	Power Supply Rejection Ratio				150			150	$\mu\text{V}/\text{V}$
$A_{VS}$	Large Signal Voltage Gain	$R_L \geq 2.0\text{ k}\Omega$	20	200		20	200		V/mV
$V_{OP}$	Output Voltage Swing (Note 5)	$R_L = 10\text{ k}\Omega$	3.3			3.3			V
		$5.0\text{V} \leq V_+ \leq 30\text{V}$ , $R_L = 10\text{ k}\Omega$	(V+) -2.0			(V+) -2.0			
CS	Channel Separation	1.0 Hz $\leq f \leq$ 20 kHz (Input Referenced)		-120			-120		dB

**Note 1:**  $T_{J\text{ Max}} = 150^\circ\text{C}$  for the Molded DIP and SO-14, and  $175^\circ\text{C}$  for the Ceramic DIP.







**Note 2:** Ratings apply to ambient temperature at  $25^\circ\text{C}$ . Above this temperature, derate the 14L-Ceramic DIP at  $9.1\text{ mW}/^\circ\text{C}$ , the 14L-Molded DIP at  $8.3\text{ mW}/^\circ\text{C}$ , and the SO-14 at  $7.5\text{ mW}/^\circ\text{C}$ .

**Note 3:** For supply voltage less than 30V between  $V_+$  and  $V_-$ , the absolute maximum input voltage is equal to the supply voltage.

**Note 4:** Not to exceed maximum package power dissipation.

**Note 5:** Output will swing to ground.


## Typical Performance Characteristics



TL/H/10064-3

# Typical Applications

## Multiple Feedback Bandpass Filter

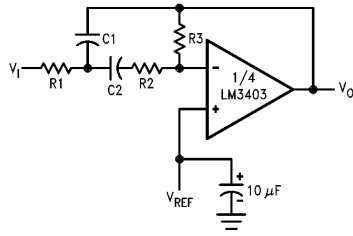

TL/H/10064-4

$f_o$  = center frequency  
 BW = Bandwidth  
 R in k $\Omega$   
 C in  $\mu$ F

$$Q = \frac{f_o}{BW} < 10$$

$$C1 = C2 = \frac{Q}{3}$$

$R1 = R2 = 10 \text{ k}\Omega$ ,  $R3 = 9Q^2 - 10$  } Using scaling factors in these expressions.


If source impedance is high or varies, filter may be preceded with voltage follower buffer to stabilize filter parameters.

Design example:

given:  $Q = 5$ ,  $f_o = 1 \text{ kHz}$   
 Let  $R1 = R2 = 10 \text{ k}\Omega$   
 then  $R3 = 9(5)^2 - 10$   
 $R3 = 215 \text{ k}\Omega$

$$C = \frac{5}{3} = 1.6 \text{ nF}$$

## Wein Bridge Oscillator

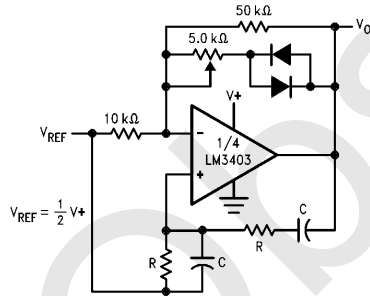


TL/H/10064-5

$$f_o = \frac{1}{2\pi RC} \text{ for } f_o = 1 \text{ kHz}$$

$R = 16 \text{ k}\Omega$   
 $C = 0.01 \text{ }\mu\text{F}$

## Comparator with Hysteresis

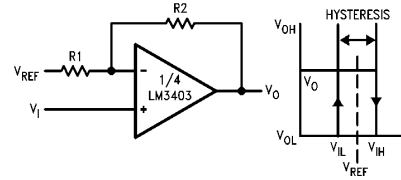


TL/H/10064-6

$$V_{IL} = \frac{R1}{R1 + R2} (V_{OL} - V_{REF}) + V_{REF}$$

$$V_{IH} = \frac{R1}{R1 + R2} (V_{OH} - V_{REF}) + V_{REF}$$

$$H = \frac{R1}{R1 + R2} (V_{OH} - V_{OL})$$

## High Impedance Differential Amplifier

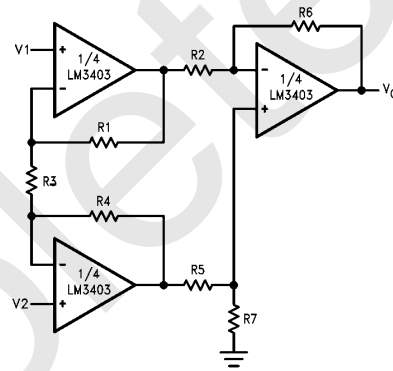

TL/H/10064-7

$$V_{OUT} = C(1 + a + b)(V2 - V1)$$


$$\frac{R2}{R5} = \frac{R6}{R7} \text{ for best CMRR}$$

$$R1 = R4$$

$$R2 = R5$$

$$\text{Gain} = \frac{R6}{R5} \left( 1 + \frac{2R1}{R3} \right) = C(1 + a + b)$$

## AC Coupled Non-Inverting Amplifier

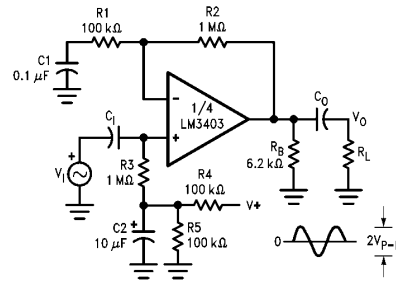


TL/H/10064-9

$$A_v = 1 + \frac{R2}{R1}$$

$$A_v = 11 \text{ (as shown)}$$

## Typical Applications (Continued)

### AC Coupled Inverting Amplifier

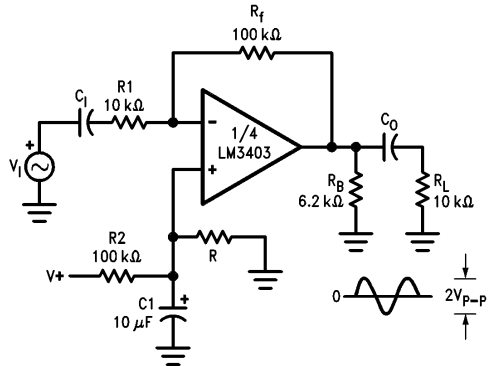


TL/H/10064-8

$$A_V = \frac{R_f}{R_1}$$

$A_V = 10$  (as shown)

### Voltage Reference




TL/H/10064-10

$$V_O = \frac{R_1}{R_1 + R_2} \left( = \frac{V_+}{2} \text{ as shown} \right)$$


$$V_O = \frac{1}{2} V_+$$

### Ground Referencing a Differential Input Signal

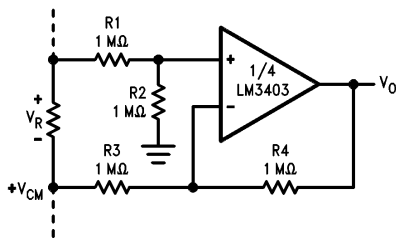


TL/H/10064-11

### Pulse Generator

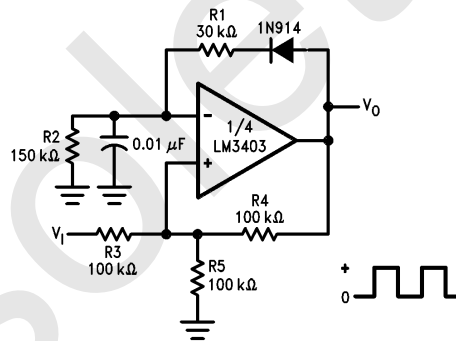

TL/H/10064-14

### Voltage Controlled Oscillator

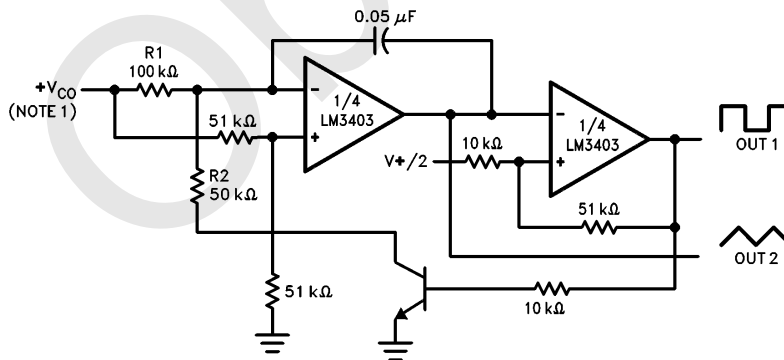


TL/H/10064-12

**Note 1:** Wide Control Voltage Range:

$$0V \leq V_{CO} \leq 2(V \pm 1.5V)$$

## Typical Applications (Continued)


### Function Generator

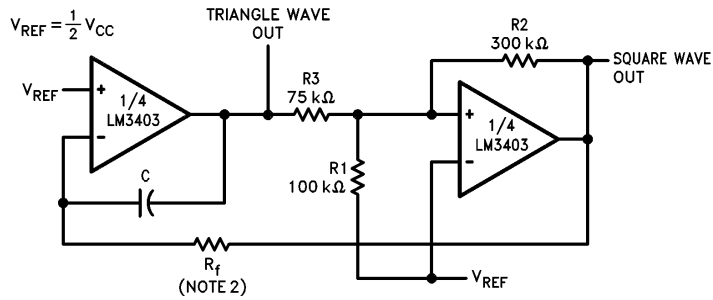

Note 2:  $f = \frac{R1 + R2}{4CR1R1}$  if  $R3 = \frac{R2R1}{R2 + R1}$

TL/H/10064-13

### Bi-Quad Filter

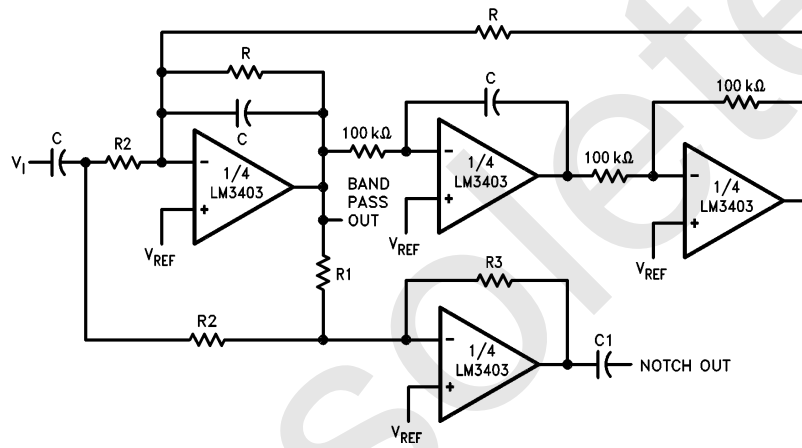

TL/H/10064-15

$$Q = \frac{BW}{f_o}$$

where:

$T_{BP}$  = Center Frequency Gain

$T_N$  = Bandpass Notch Gain

$$f_o = \frac{1}{2\pi RC} \cdot V_{REF} = \frac{1}{2} V_{CC}$$

$$R1 = QR$$

$$R2 = \frac{R1}{T_{BP}}$$

$$R3 = T_N R2$$

$$C1 = 10 C$$

Example:

$$f_o = 1000 \text{ Hz}$$

$$BW = 100 \text{ Hz}$$

$$T_{BP} = 1$$

$$T_N = 1$$

$$R = 160 \text{ k}\Omega$$

$$R1 = 1.6 \text{ M}\Omega$$

$$R2 = 1.6 \text{ M}\Omega$$


$$R3 = 1.6 \text{ M}\Omega$$

$$C = 0.001 \text{ }\mu\text{F}$$




Obsolete

**Physical Dimensions** inches (millimeters)

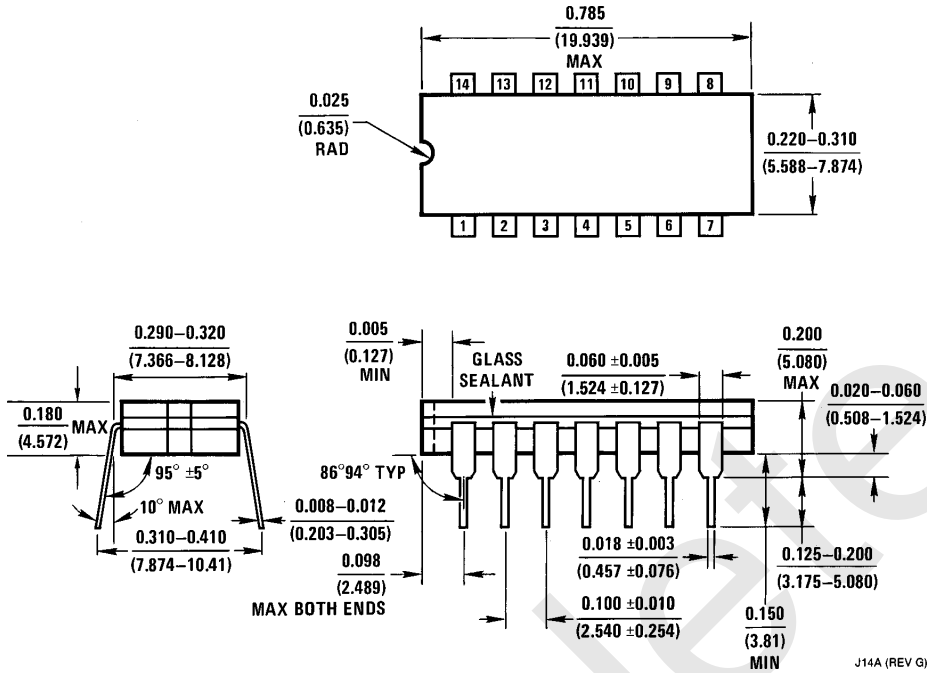

**14-Lead Ceramic Dual-In-Line Package (J)**  
 Order Number LM3303J or LM3403J  
 NS Package Number J14A


J14A (REV G)

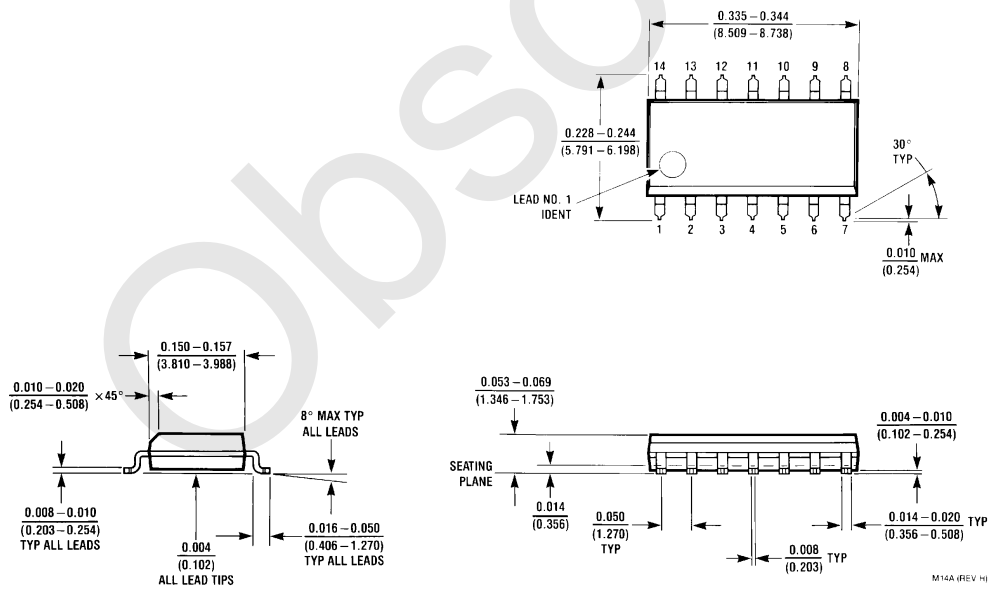

**14-Lead Molded Surface Mount (M)**  
 Order Number LM3403M  
 NS Package Number M14A

M14A (REV H)

**Physical Dimensions** inches (millimeters) (Continued)

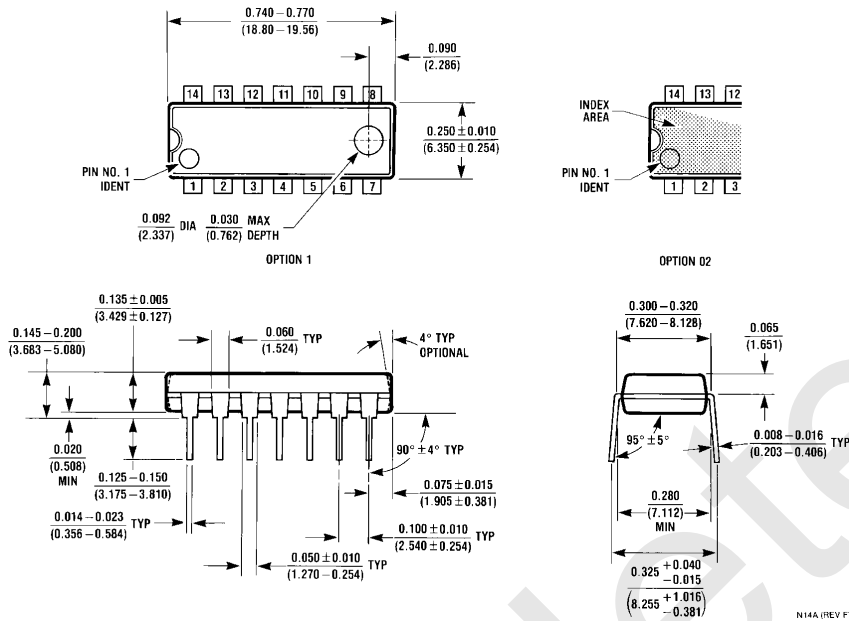

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
 1111 West Bardin Road  
 Arlington, TX 76017  
 Tel: 1(800) 272-9959  
 Fax: 1(800) 737-7018

**National Semiconductor Europe**  
 Fax: (+49) 0-180-530 85 86  
 Email: cnjwge@tevm2.nsc.com  
 Deutsch Tel: (+49) 0-180-530 85 85  
 English Tel: (+49) 0-180-532 78 32  
 Français Tel: (+49) 0-180-532 93 58  
 Italiano Tel: (+49) 0-180-534 16 80

**National Semiconductor Hong Kong Ltd.**  
 19th Floor, Straight Block,  
 Ocean Centre, 5 Canton Rd.  
 Tsimshatsui, Kowloon  
 Hong Kong  
 Tel: (852) 2737-1600  
 Fax: (852) 2736-9960

**National Semiconductor Japan Ltd.**  
 Tel: 81-043-299-2309  
 Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Mobile Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Transportation and Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

TI E2E Community Home Page

[e2e.ti.com](http://e2e.ti.com)

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2011, Texas Instruments Incorporated