

QUADRUPLE EXCLUSIVE-OR GATE

The HEF4030B provides the positive quadruple exclusive-OR function. The outputs are fully buffered for highest noise immunity and pattern insensitivity of output impedance.

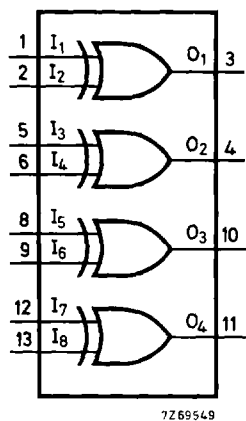


Fig. 1 Functional diagram.




Fig. 2 Pinning diagram.

HEF4030BP(N): 14-lead DIL; plastic
(SOT27-1)
HEF4030BD(F): 14-lead DIL; ceramic (cerdip)
(SOT73)
HEF4030BT(D): 14-lead SO; plastic
(SOT108-1)
(): Package Designator North America

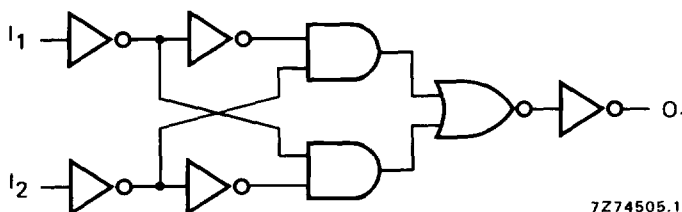


Fig. 3 Logic diagram (one gate).

TRUTH TABLE

I ₁	I ₂	O ₁
L	L	L
H	L	H
L	H	H
H	H	L

H = HIGH state (the more positive voltage)

L = LOW state (the less positive voltage)

FAMILY DATA

I_{DD} LIMITS category GATES

} see Family Specifications

HEF4030B

gates

A.C. CHARACTERISTICS

$V_{SS} = 0\text{ V}$; $T_{amb} = 25\text{ }^{\circ}\text{C}$; $C_L = 50\text{ pF}$; input transition times $\leq 20\text{ ns}$

	V_{DD} V	symbol	typ.	max.		typical extrapolation formula	
Propagation delays $I_n \rightarrow O_n$ HIGH to LOW	5	t _{PHL}	85	175	ns	57 ns + (0,55 ns/pF) C _L	
	10		35	75	ns	24 ns + (0,23 ns/pF) C _L	
	15		30	55	ns	22 ns + (0,16 ns/pF) C _L	
	LOW to HIGH	5	t _{PLH}	75	150	ns	47 ns + (0,55 ns/pF) C _L
		10		30	65	ns	19 ns + (0,23 ns/pF) C _L
		15		25	50	ns	17 ns + (0,16 ns/pF) C _L
Output transition times HIGH to LOW	5	t _{THL}	60	120	ns	10 ns + (1,0 ns/pF) C _L	
	10		30	60	ns	9 ns + (0,42 ns/pF) C _L	
	15		20	40	ns	6 ns + (0,28 ns/pF) C _L	
	LOW to HIGH	5	t _{TLH}	60	120	ns	10 ns + (1,0 ns/pF) C _L
		10		30	60	ns	9 ns + (0,42 ns/pF) C _L
		15		20	40	ns	6 ns + (0,28 ns/pF) C _L

	V_{DD} V	typical formula for P (μW)	where f _i = input freq. (MHz) f _o = output freq. (MHz) C _L = load capacitance (pF) Σ(f _o C _L) = sum of outputs V _{DD} = supply voltage (V)
Dynamic power dissipation per package (P)	5	1 100 f _i + Σ(f _o C _L) × V _{DD} ²	
	10	4 900 f _i + Σ(f _o C _L) × V _{DD} ²	
	15	14 400 f _i + Σ(f _o C _L) × V _{DD} ²	