


The RF Line
VHF Power Transistors

... designed primarily for wideband, large-signal output amplifier stages in the 30-200 MHz frequency range.

- Guaranteed Performance at 175 MHz, 28 Vdc
 Output Power — 4 to 25 Watts
 Minimum Gain — 10 to 13 dB
 Collector Efficiency — 60%, Min
- 100% Tested for Load Mismatch at All Phase Angles with 30:1 VSWR
- Gold Metallization for Improved Reliability
- Diffused Ballast Resistors

PT9730
Series

TO 200 MHz
4 TO 25 WATTS
VHF POWER
TRANSISTORS
NPN SILICON



CASE 145D-01, STYLE 1
 (.380 SOE)

MAXIMUM RATINGS

Rating	Symbol	9730	9732	9734	9731	Unit
Collector-Emitter Voltage	V _{CEO}	35				Vdc
Collector-Base Voltage	V _{CES}	60				Vdc
Emitter-Base Voltage	V _{EBO}	4				Vdc
Collector Current — Continuous	I _C	1	1.25	2.5	4	Adc
Total Device Dissipation (at T _C = 25°C Derate above 25°C)	P _D	10 0.06	20 0.114	30 0.173	45 0.257	Watts W/°C
Operating Junction Temperature	T _J	200				°C
Storage Temperature Range	T _{stg}	-65 to +150				°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max				Unit
Thermal Resistance, Junction to Case	R _{θJC}	17.5	8.8	5.8	3.9	°C/W

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage (I _C = 25 mA, I _B = 0)	V _{(BR)CEO}	35	—	—	Vdc
Collector-Emitter Breakdown Voltage (I _C = 50 mA, V _{BE} = 0)	V _{(BR)CES}	60	—	—	Vdc
Emitter-Base Breakdown Voltage (I _E = 1 mA, I _C = 0)	V _{(BR)EBO}	4	—	—	Vdc
Collector Cutoff Current (V _{CE} = 25 V, V _{BE} = 0)	PT9730 PT9732 PT9734 PT9731	I _{CES}	— — — —	— — — —	0.5 1 1.5 2 mAdc

ON CHARACTERISTICS

DC Current Gain (I _C = 500 mA, V _{CE} = 10 V)	h _{FE}	20	—	150	—
---	-----------------	----	---	-----	---

DYNAMIC CHARACTERISTICS

Output Capacitance (V _{CB} = 28 V, I _E = 0, f = 1 MHz)	PT9730 PT9732 PT9734 PT9731	C _{ob}	— — — —	— — — —	12 18 24 40 pF
---	--------------------------------------	-----------------	------------------	------------------	----------------------------

(continued)

PT9730 Series

ELECTRICAL CHARACTERISTICS — continued

Characteristic	Symbol	Min	Typ	Max	Unit
FUNCTIONAL TESTS					
Common-Emitter Amplifier Power Gain ($V_{CE} = 28 \text{ V}$, $P_{out} = \text{Rated}$, $f = 175 \text{ MHz}$)	PT9730 PT9732 PT9734 PT9731	13 12 11.8 10	— — — —	— — — —	dB
Collector Efficiency ($V_{CE} = 28 \text{ V}$, $P_{out} = \text{Rated}$, $f = 175 \text{ MHz}$)	η_c	60	—	—	%
Load Mismatch ($V_{CE} = 28 \text{ V}$, $P_{out} = \text{Rated}$, $f = 175 \text{ MHz}$, Load VSWR = $\infty:1$, All Phase Angles)	ψ	No Degradation in Output Power			
Saturated Output Power ($V_{CE} = 28 \text{ V}$, $f = 175 \text{ MHz}$)	PT9730 PT9732 PT9734 PT9731	6 10 18 30	— — — —	— — — —	W

TYPICAL CHARACTERISTICS PT9730 — 4 WATTS

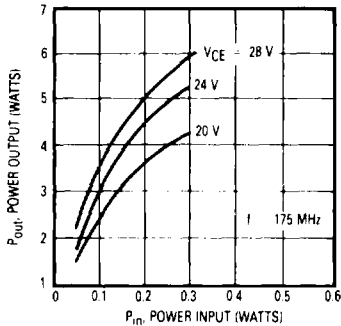


Figure 1. Power Input versus Power Output

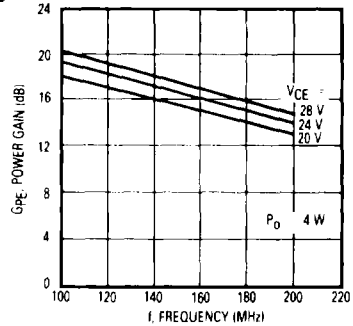


Figure 2. Power Gain versus Frequency

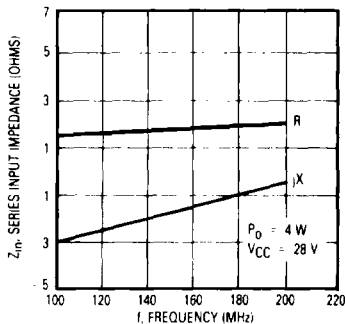


Figure 3. Series Input Impedance versus Frequency

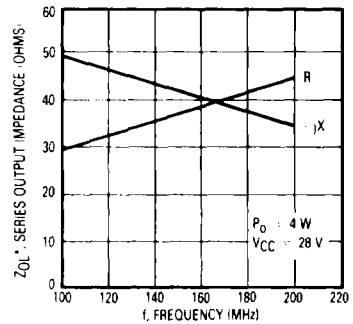


Figure 4. Series Output Impedance versus Frequency

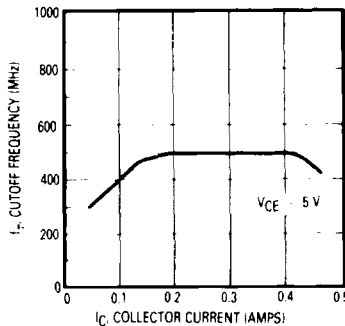


Figure 5. Cutoff Frequency versus Current

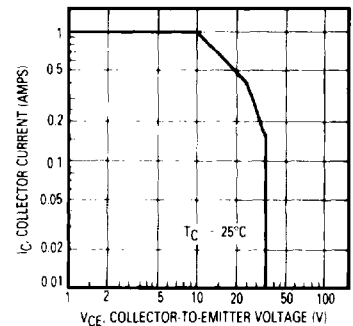


Figure 6. Safe Operating Area

PT9730 Series

TYPICAL CHARACTERISTICS PT9732 — 8 WATTS

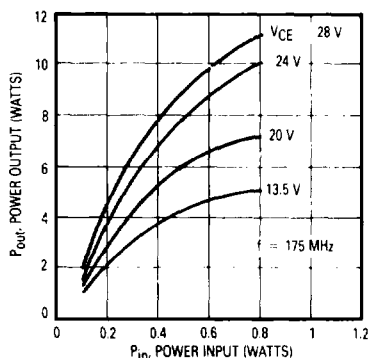


Figure 7. Power Output versus Power Input

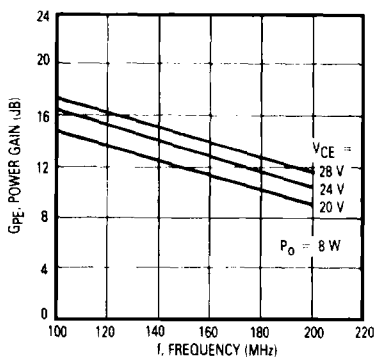


Figure 8. Power Gain versus Frequency

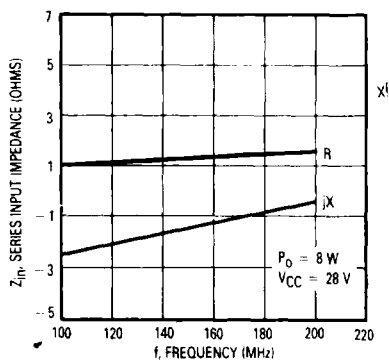


Figure 9. Series Input Impedance versus Frequency

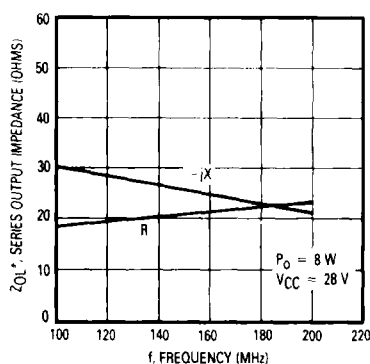


Figure 10. Series Output Impedance versus Frequency

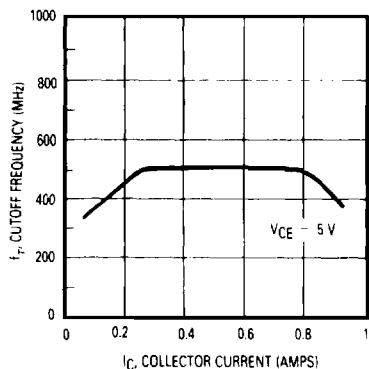


Figure 11. Cutoff Frequency versus Current

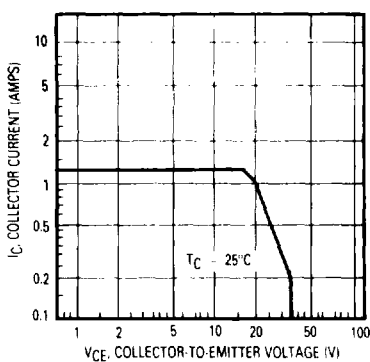


Figure 12. Safe Operating Area

PT9730 Series

TYPICAL CHARACTERISTICS PT9734 — 15 WATTS

2

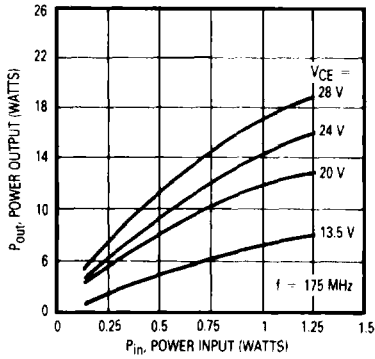


Figure 13. Power Output versus Power Input

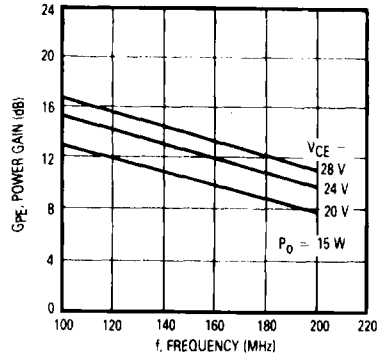


Figure 14. Power Gain versus Frequency

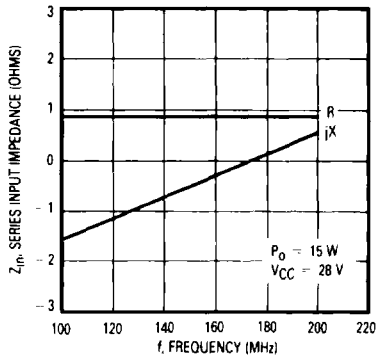


Figure 15. Series Input Impedance versus Frequency

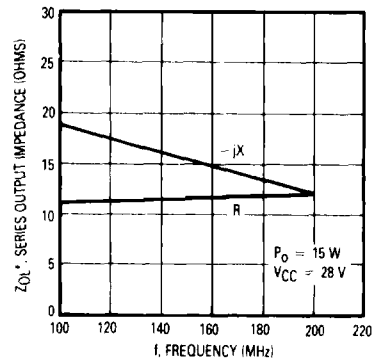


Figure 16. Series Output Impedance versus Frequency

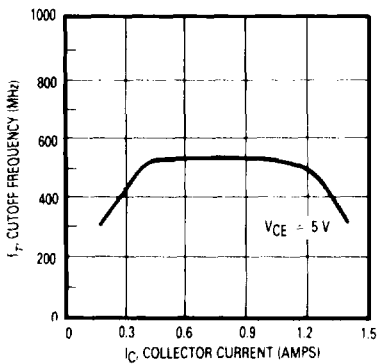


Figure 17. Cutoff Frequency versus Current

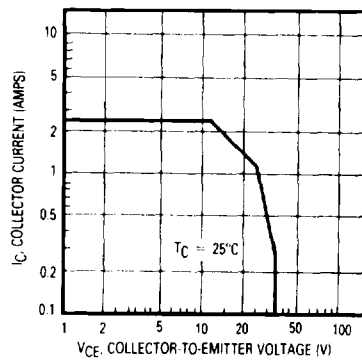


Figure 18. Safe Operating Area

PT9730 Series

TYPICAL CHARACTERISTICS PT9731 — 25 WATTS

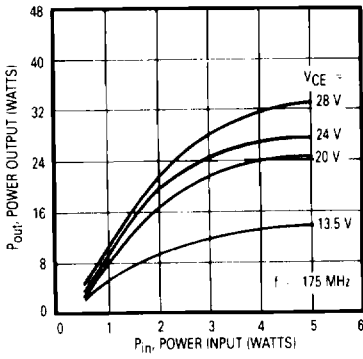


Figure 19. Power Output versus Power Input

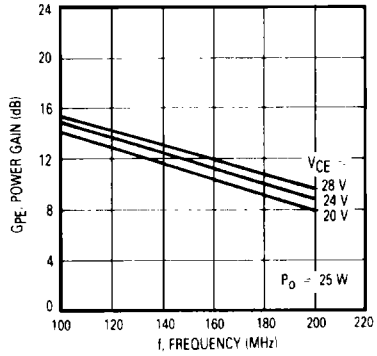


Figure 20. Power Gain versus Frequency

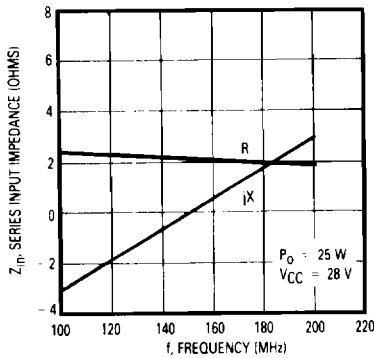


Figure 21. Series Input Impedance versus Frequency

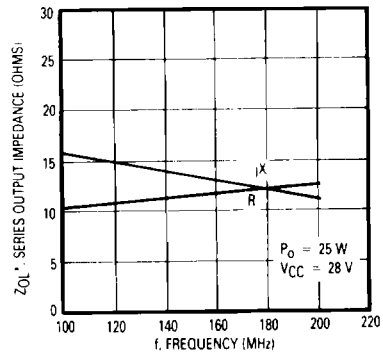


Figure 22. Series Output Impedance versus Frequency

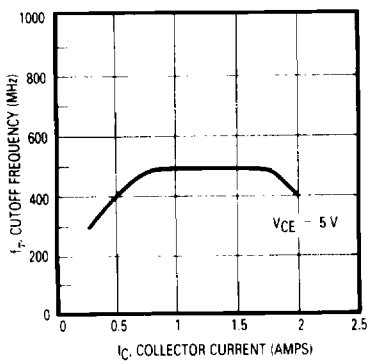


Figure 23. Cutoff Frequency versus Current

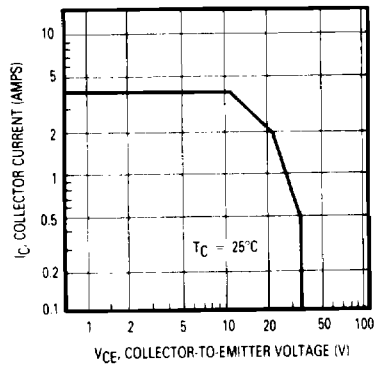


Figure 24. Safe Operating Area

PT9730 Series

2

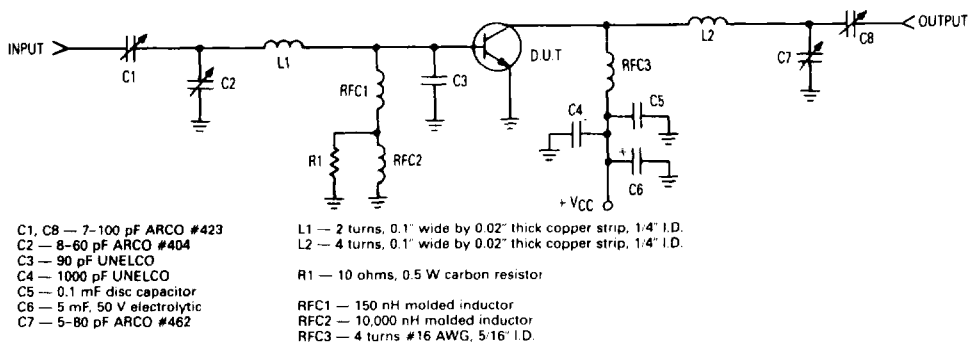
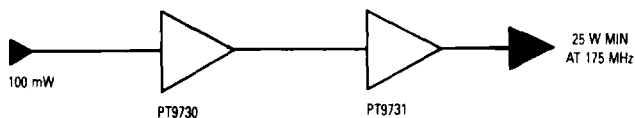


Figure 25. 175 MHz Test Circuit (PT9731)



**Figure 26. Typical Application
25 Watt VHF 24 V Power Amplifier**

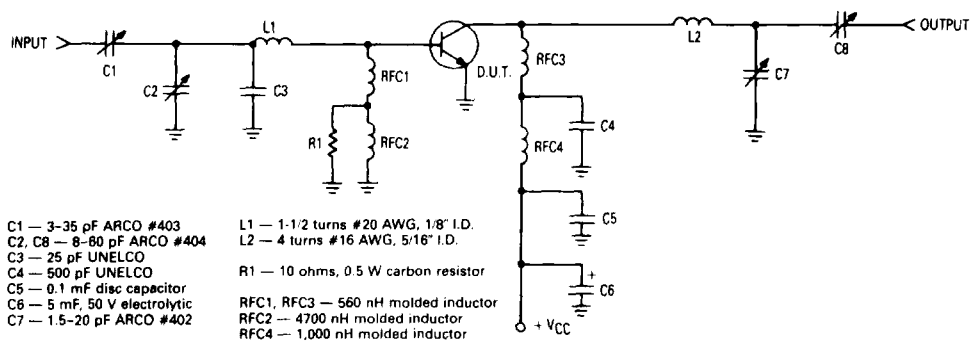


Figure 27. 175 MHz Test Circuit (PT9730 and PT9732)

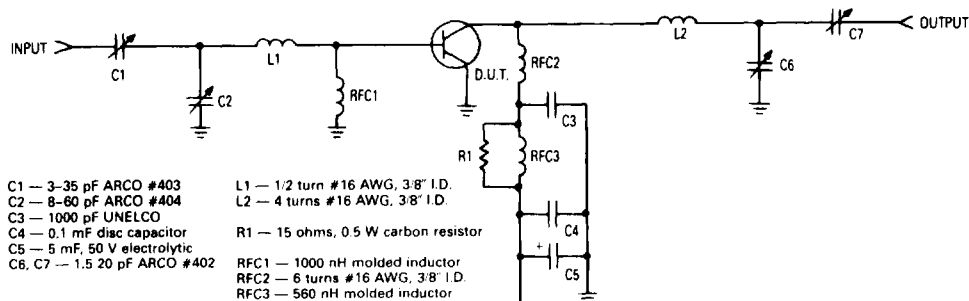


Figure 28. 175 MHz Test Circuit (PT9734)