

8-BIT HIGH SPEED MULTIPLYING D/A CONVERTER

■ GENERAL DESCRIPTION


NJMDAC-08C series are 8-bit monolithic multiplying digital to analog converters with very highspeed performance. Open collector output provides dual complementary current outputs increasing versatility in application.

Adjustable threshold logic input voltage through V_{L.C} pin, can be connected to various type of digital IC products.


■ FEATURES

- Resolution (8bit)
- Settling Time (85ns)
- Linearity Error ($\pm 0.1\%$ FS MAX (NJM DAC -08H))
- Full Scale Current Temperature Drift (50ppm/ $^{\circ}\text{C}$ MAX (NJM DAC -08H/E))
- Wide Operating Voltage ($\pm 5\text{V} \sim \pm 18\text{V}$)
- Wide Output Voltage Range ($-10\text{V} \sim +18\text{V}$)
- Wide Range Adjustable Threshold Logic Input ($-10\text{V} \sim +13.5\text{V}$ ($\text{V}^+/\text{V}^- = \pm 15\text{V}$))
- Multiplying operations can be performed
- Package Outline DIP16, DMP16
- Bipolar Technology

■ PACKAGE OUTLINE




NJMDAC-08DC




NJMDAC-08MC

■ PIN CONFIGURATION

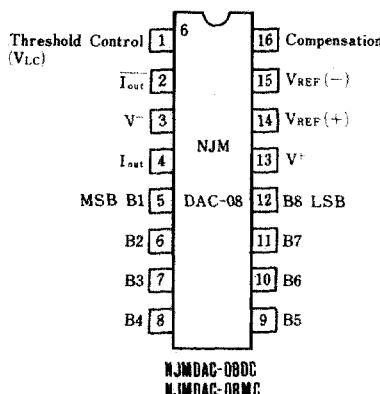

■ BLOCK DIAGRAM

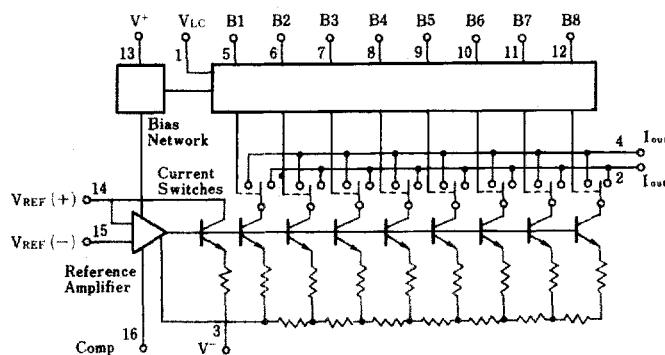

(Ta=25°C)

■ ABSOLUTE MAXIMUM RATINGS





PARAMETER	SYMBOL	RATINGS	UNIT
Supply voltage	V ⁺ - V ⁻	36	V
Logic Input Voltage Range	V _I	V ⁺ ~ V ⁻ + 36	V
Threshold Control Input Voltage	V _{TC}	V ⁺ ~ V ⁺	V
Analog Current Outputs	I _O	4.2	mA
Reference Input Voltage Range	V _{REF}	V ⁺ ~ V ⁺	V
Reference Input Differential Voltage	V _{REF(+)} - V _{REF(-)}	±18	V
Reference Input Current	I _{REF}	5.0	mA
Power Dissipation	P _D	(DIP16) 500 (DMP16) 300	mW
Operating Temperature Range	T _{opr}	-20 ~ +75	°C
Storage Temperature Range	T _{stg}	-40 ~ +125	°C

■ ELECTRICAL CHARACTERISTICS ($V^+ = \pm 15V$, $I_{REF} = 2.0mA$, $T_a = 25^\circ C$)


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Resolution			8	8	8	Bit
Monotonicity			8	8	8	Bit
Nonlinearity	NL			± 0.39	%FS	
*1 Settling Time	t_{S}	To $\pm 1/2$ LSB, all bits switched ON or OFF		85	150	ns
*2 Propagation Delay	t_{PLH} t_{PHL}	All bits switched		35	60	ns
*3 Full Scale Temperature Coefficient	TCl_{IFS}			± 10	± 80	ppm/ $^\circ C$
Output Voltage Compliance	V_{OC}	$\Delta I_{IFS} < 1/2$ LSB $R_{OUT} > 20M\Omega$ typ.	-10		+18	V
Full Scale Current	I_{IFS4}	$V_{REF} = 10.000V$ $R_{14}, R_{15} = 5.000k\Omega$	1.94	1.99	2.04	mA
Full Scale Symmetry	I_{IFS5}	$I_{IFS4} - I_{IFS2}$		± 2.0	± 16.0	μA
Zero Scale Current	I_{ZS}			0.2	4.0	μA
Output Current Range	I_{OR1} I_{OR2}	$V_{REF} = 15V, V^- = 10V$ $R_{14, 15} = 15.000k\Omega$	2.1			mA
Logic Input Level "0"	V_{IL}	$V_{LC} = 0V$			0.8	V
"1"	V_{IH}	$V_{LC} = 0V$	2.0			V
Logic Input Current "0"	I_{IL}	$V_{LC} = 0V, V_{IN} = -10V \sim +0.8V$		-2.0	-10	μA
"1"	I_{IH}	$V_{LC} = 0V, V_{IN} = 2V \sim 18V$		0.002	10	μA
Logic Input Swing	V_{IS}		-10		+18	V
Logic Threshold Range	V_{TH2}		-10		+13.5	V
Reference Bias Current	I_{IS}			-1.0	-3.0	μA
*4 Reference Input Slew Rate	dI/dt		4.0	8.0		$mA/\mu s$
*5 Power Supply Sensitivity	PSSI _{IFS}	$V^+ = 4.5V \sim 18V, I_{REF} = 1.0mA$		± 0.0003	± 0.01	%/%
	PSSI _{IFS}	$V^- = -4.5V \sim 18V, I_{REF} = 1.0mA$		± 0.002	± 0.01	
*6 Operating Current	I^+	$V^+ = \pm 5V, I_{REF} = 1.0mA$	2.3	3.8		
	I^-	"	-4.3	-5.8		
	I^+	$V^+ = 5V, V^- = -15V$	2.4	3.8		
	I^-	"	-6.4	-7.8		mA
	I^+	"	2.5	3.8		
	I^-	"	-6.5	-7.8		

*1 Guaranteed by design


*2 Calculation formula $PSSI_{IFS} = \left(\frac{|\Delta I_{IFS}|}{I_{IFS}} \times 100 \right) \div \left(\frac{18 - 4.5}{15} \right) \times 100$ *3 Calculation formula $P_B = I^+ \times (V^+ - V^-) + 2I_{REF} \times |V^-|$

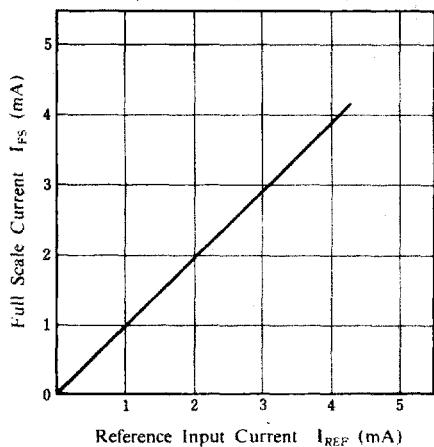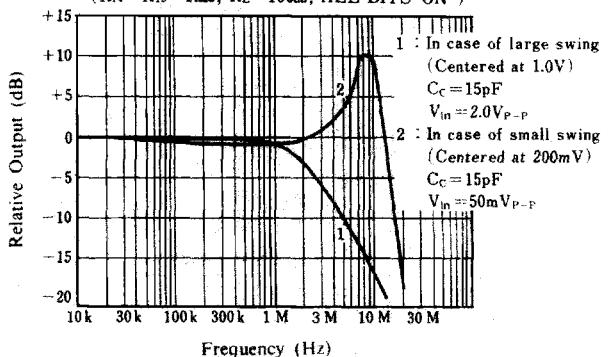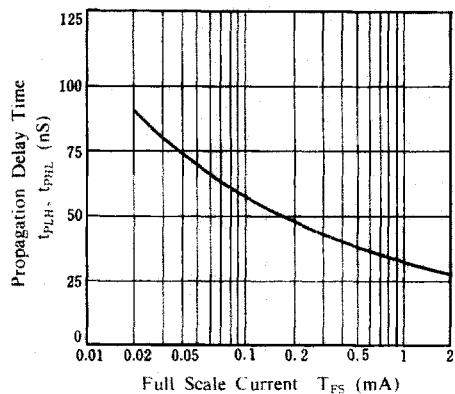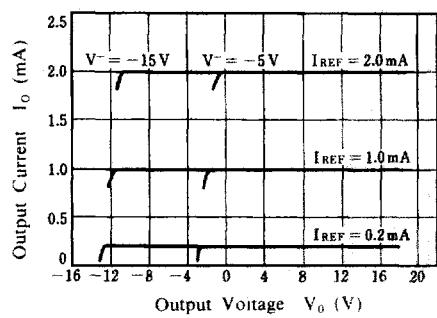■ TYPICAL CHARACTERISTICS
**Full Scale Current vs.
Reference Input Current**
(All bits on, $V^- = -15V$)
Reference Input Frequency Response
 $(R_{14} = R_{15} = 1k\Omega, R_L = 100\Omega, \text{ALL BITS "ON"})$ 
**Propagation Delay Time vs.
Full Scale Current**

Output Current vs. Output Voltage

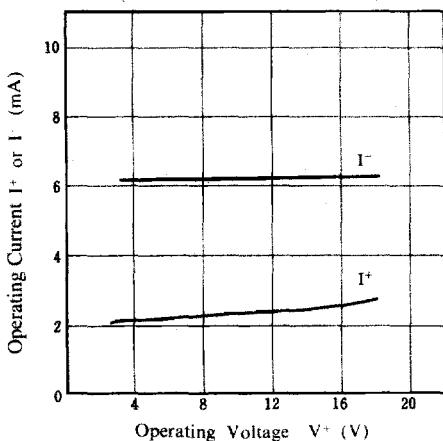Operating Current vs. Operating Voltage

(ALL BITS "HIGH", OR "LOW")

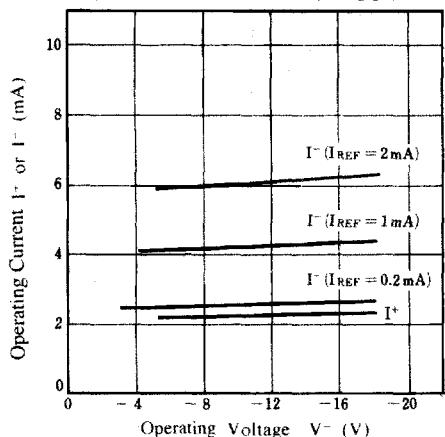

Operating Current vs. Operating Voltage

(BITS MAY BE "HIGH" OR "LOW")




■ TYPICAL CHARACTERISTICS

Operating Current vs. Ambient Temperature

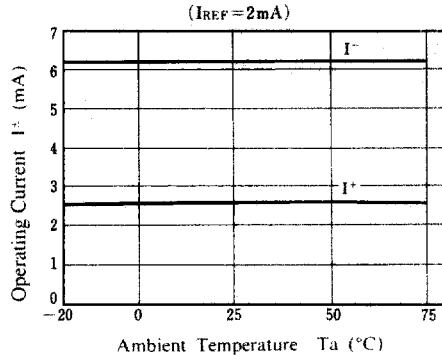


Full Scale Current vs. Ambient Temperature

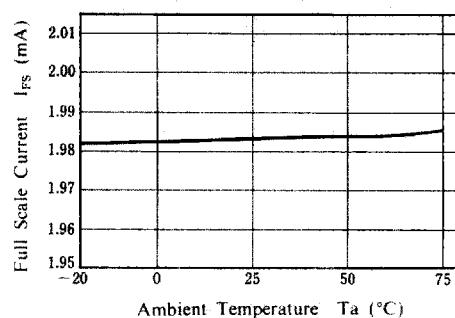


■ TYPICAL APPLICATION

① Connecting Reference Voltage


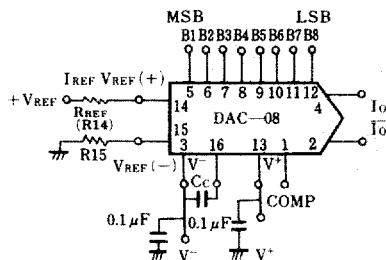


- ① Positive Reference Voltage
Minimum Compensation Capacitance
 $C_C = R_{REF}(k\Omega) \times 15(pF)$

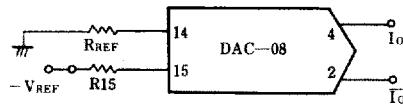

- ② Negative Reference Voltage
Recommended C_C Value
(When V_{REF} is DC)

② Connecting Output Circuit

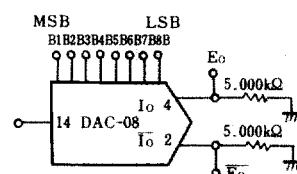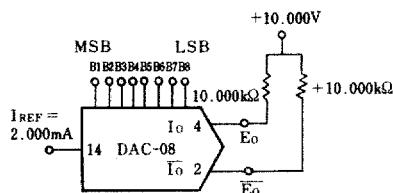

	B1	B2	B3	B4	B5	B6	B7	B8	Eo	Ibar_o
POS FULL RANGE	1	1	1	1	1	1	1	1	- 9.920	$\div 10.000$
POS FULL RANGE - LSB	1	1	1	1	1	1	1	0	- 9.840	$\div 9.920$
ZERO SCALE \div LSB	1	0	0	0	0	0	0	1	- 0.050	$\div 0.160$
ZERO SCALE	1	0	0	0	0	0	0	0	0.000	$\div 0.050$
ZERO SCALE - LSB	0	1	1	1	1	1	1	1	$\div 0.080$	0.000
NEG FULL SCALE \div LSB	0	0	0	0	0	0	0	1	$\div 9.920$	- 9.920
NEG FULL SCALE	0	0	0	0	0	0	0	0	$\div 10.000$	- 9.920


(1) Basic Bipolar Output Operation

	B1	B2	B3	B4	B5	B6	B7	B8	I _{MAX}	I _{MIN}	E _O	I _{BAR_O}
FULL RANGE	1	1	1	1	1	1	1	1	1.992	0.000	- 9.960	- 0.000
HALF SCALE \div LSB	1	0	0	0	0	0	0	1	1.008	0.984	- 5.040	- 4.960
HALF SCALE	1	0	0	0	0	0	0	0	1.000	0.992	- 5.000	- 4.960
HALF SCALE - LSB	0	1	1	1	1	1	1	1	0.992	1.000	- 4.960	- 5.000
ZERO SCALE \div LSB	0	0	0	0	0	0	0	1	0.008	1.984	- 0.040	- 9.920
ZERO SCALE	0	0	0	0	0	0	0	0	0.000	1.992	- 0.000	- 9.950


(2) Basic Unipolar Negative Operation

NJMDAC-08C

③ Connecting Output Buffer Amp.

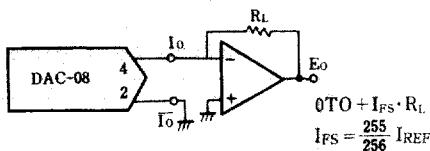


(1) Positive Low Impedance Output Operation

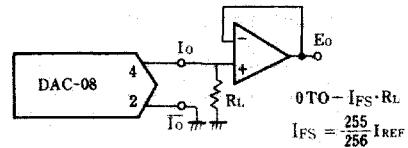

(2) Negative Low Impedance Output Operation

④ Connecting to various type logic IC products

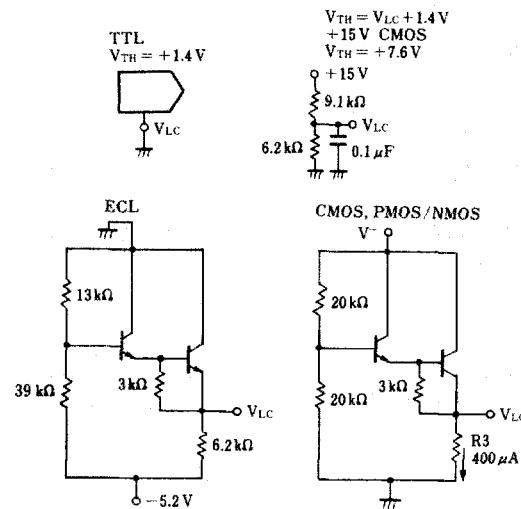

V_{TH} temperature compensation is considered in the above circuit