



## RS422/RS423 Line Drivers/Receivers

- Single chip serial transceiver supports RS422 or RS423 interfaces
- Programmable Selection of Interface
- Two Full-Duplex Channels of Either Interface
- Software-Selectable Mode
- Loopback for Self-Testing
- Short-Circuit Protected
- Surface Mount Packaging

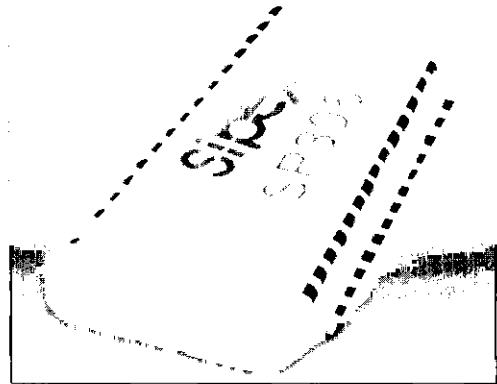

### DESCRIPTION...

The **SP306** is a single chip device that offers both RS422 and RS423-type serial interfaces. The device can be programmed to provide two full-duplex channels of either RS422 or RS423 via two mode control pins. The **SP306** also features a loopback function that can be activated in any operating mode. The **SP306** is available in a 28-pin SOIC package for operation over the commercial temperature range.

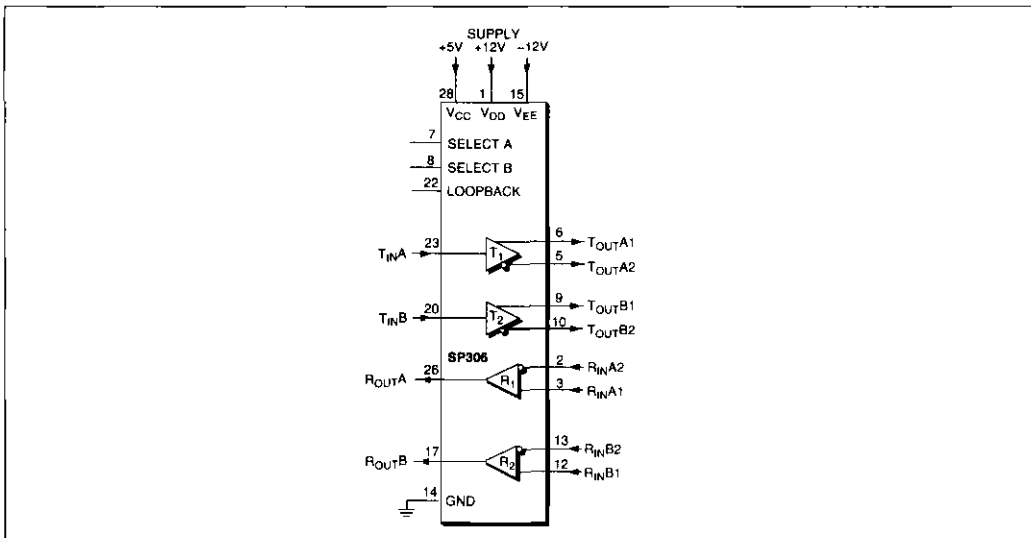

## SPECIFICATIONS


( $T_{MIN} \leq T_A \leq T_{MAX}$  and nominal supply voltages unless otherwise noted)

| PARAMETER                           | MIN.      | TYP.                    | MAX.                                   | UNIT       | CONDITIONS   |
|-------------------------------------|-----------|-------------------------|--|------------|--|
| <b>RS423 DRIVER</b>                 |           |                         |  |            |  |
| TTL Input Level                     |           |                         |  |            |  |
| $V_{IL}$                            | 0         |                         | 0.8                                    | V          |  |
| $V_{IH}$                            | 2.0       |                         |  | V          |  |
| High Level Output                   | +3.0      |                         | +6.0                                   | V          | $R_L = 450\Omega$ , $V_{IN} = 0.8V$ ; Note 6                         |
| Low Level Output                    | -3.0      |                         | -6.0                                   | V          | $R_L = \infty$   |
| Short Circuit Current               |           |                         | $(V_{DD} - 0.7V)$<br>$(V_{EE} + 0.7V)$ | V          | $R_L = 450\Omega$ , $V_{IN} = 2.0V$ ; Note 6                         |
| Transition Time                     |           | 720                     |  | ns         | $R_L = \infty$   |
| Transmission Rate                   |           |                         | 100                                    | Kbps       | $V_{OUT} = 0V$ ; Note 2<br>$R_L = 450\Omega$ , $C_L = 50pF$ ; Note 3 |
| <b>RS423 RECEIVER</b>               |           |                         |  |            |  |
| Input Threshold                     | -200      |                         | +200                                   | mV         | Common-mode = $\pm 7V$ ; Note 1                                      |
| Input Impedance                     | 4         |                         |  | K $\Omega$ | $R_{IN} = \pm 10V$   |
| TTL Output Level                    |           |                         |  |            |  |
| $V_{OL}$                            |           |                         | 0.4                                    | V          | $V_{CC} = +4.75V$ , $I_{OUT} = +1.6mA$                               |
| $V_{OH}$                            | 2.4       |                         |  | V          | $V_{CC} = +4.75V$ , $I_{OUT} = -0.5mA$                               |
| Receiving Rate                      |           |                         | 100                                    | Kbps       |  |
| <b>RS422 DRIVER</b>                 |           |                         |  |            |  |
| TTL Input Level                     |           |                         |  |            | Note 3   |
| $V_{IL}$                            | 0         |                         | 0.8                                    | V          |  |
| $V_{IH}$                            | 2.0       |                         |  | V          |  |
| High Level Output                   | +2.75     |                         | +6                                     | V          | $I_{OH} = -20mA$   |
| Low Level Output                    |           |                         | +1.0                                   | V          | $I_{OL} = 20mA$  |
| Differential Output                 | $\pm 2.0$ |                         |  | V          | $R_L = 100\Omega$  |
| Short Circuit Current               |           |                         | $\pm 6.0$                              | V          | $R_L = \infty$   |
| Output Current                      |           |                         | $\pm 100$                              | mA         |  |
| Transition Time                     |           |                         | $\pm 500$                              | $\mu A$    | $-0.25V < V_O < 6V$ ; Power off                                      |
| Transmission Rate                   |           |                         | 400                                    | ns         | $R_L = 450\Omega$ , $C_L = 15pF$ ; Note 3                            |
|                                     |           |                         | 500                                    | Kbps       |  |
| <b>RS422 RECEIVER</b>               |           |                         |  |            |  |
| Common Mode Range                   |           |                         | $\pm 7$                                | V          | Note 4   |
| Differential Input                  |           |                         | $\pm 15$                               | V          | Note 4   |
| Differential Input Threshold        | -0.2      |                         | +0.2                                   | V          | $T_A = 25^\circ C$   |
| Input Voltage Hysteresis            | 30        |                         |  | mV         | $V_{CM} = 0V$ ; $T_A = 25^\circ C$                                   |
| Input Resistance                    | 3         |                         |  | K $\Omega$ | $-7V < V_{CM} < +7V$   |
| TTL Output Level                    |           |                         |  |            |  |
| $V_{OL}$                            |           |                         | 0.4                                    | V          | $V_{CC} = +4.75V$ , $I_{OUT} = +1.6mA$                               |
| $V_{OH}$                            | 2.4       |                         |  | V          | $V_{CC} = +4.75V$ , $I_{OUT} = -0.5mA$                               |
| Receiving Rate                      |           |                         | 500                                    | Kbps       |  |
| Short Circuit Output Current        |           |                         | $\pm 120$                              | mA         | $V_{OUT} = 0V$   |
| <b>POWER REQUIREMENTS</b>           |           |                         |  |            |  |
| $V_{DD} = +12V$                     |           | 7                       | 15                                     | mA         | All Transmitter outputs $R_L = \infty$                               |
| $V_{CC} = +5V$                      |           | 5                       | 7                                      | mA         | $T_A = 25^\circ C$   |
| $V_{EE} = -12V$                     |           | 11                      | 20                                     | mA         |  |
| <b>ENVIRONMENTAL AND MECHANICAL</b> |           |                         |  |            |  |
| Operating Temperature               |           |                         |  |            |  |
| -C                                  | 0         |                         | +70                                    | $^\circ C$ |  |
| -M                                  | -55       |                         | +125                                   | $^\circ C$ |  |
| Storage Temperature                 | -65       |                         | +150                                   | $^\circ C$ |  |
| Package                             |           |                         |  |            |  |
| -C                                  |           | 28-pin SOIC             |  |            |  |
| -F                                  |           | 28-pin Ceramic Flatpack |  |            |  |

**Note:**

1. The common mode voltage is defined as the algebraic mean of the two voltages appearing at the receiver input terminals with respect to the receiver circuit ground.
2. Only one output drive pin per package will be shorted at any time.
3. From 10% to 90% of steady state.
4. This is an absolute maximum rating. Normal operating levels are  $V_{IN} \leq 5V$ .
5. Outputs unloaded. Inputs tied to GND;  $T_A = +25^\circ C$ ;  $V_{IL} = 0V$ ;  $LB = 0$ .
6.  $V_{OL}/V_{OH}$  will typically be  $\pm 3V$  over  $-55^\circ C$  to  $+125^\circ C$  with  $450\Omega$  loads.

**PINOUT**

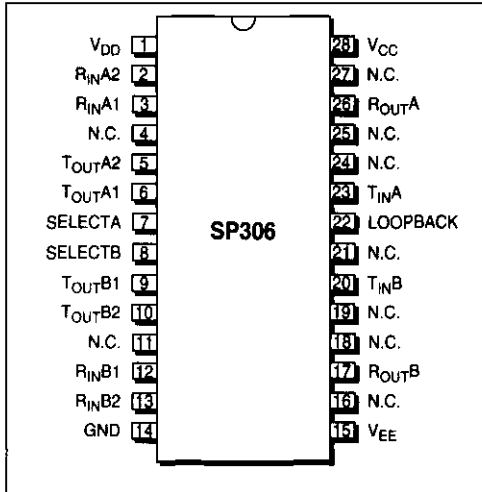

**PIN ASSIGNMENTS**

- Pin 1 —  $V_{DD}$  — +12V Power Supply.
- Pin 2 —  $R_{IN}A2$  — RS422 input.
- Pin 3 —  $R_{IN}A1$  — RS422/RS423 input.
- Pin 4 — N.C. — No Connection.
- Pin 5 —  $T_{OUT}A2$  — RS422 output.
- Pin 6 —  $T_{OUT}A1$  — RS422/RS423 output.
- Pin 7 — SEL A — Select A; used with Select B (pin 8) to select operating mode; please refer to *SP306 Control Logic Configuration* section for truth table.
- Pin 8 — SEL B — Select B; used with Select A (pin 7) to select operating mode; please refer to *SP306 Control Logic Configuration* section for truth table.
- Pin 9 —  $T_{OUT}B1$  — RS422/RS423 output.
- Pin 10 —  $T_{OUT}B2$  — RS422 output.
- Pin 11 — N.C. — No Connection.
- Pin 12 —  $R_{IN}B1$  — RS422/RS423 input.

- Pin 13 —  $R_{IN}B2$  — RS422 input
- Pin 14 — GND — Signal ground. Connected to logic and chassis ground.
- Pin 15 —  $V_{EE}$  — -12V Power Supply.
- Pin 16 — N.C. — No Connection.
- Pin 17 —  $R_{OUT}B$  — TTL output.
- Pin 18 — N.C. — No Connection.
- Pin 19 — N.C. — No Connection.
- Pin 20 —  $T_{IN}B$  — TTL input.
- Pin 21 — N.C. — No Connection.
- Pin 22 — LOOPBACK — Active low; logic “1” selects operating mode controlled by SELECT A and SELECT B; logic “0” selects loopback configuration for whatever operating mode is selected by states of SELECT A and SELECT B.
- Pin 23 —  $T_{IN}A$  — TTL input.
- Pin 24 — N.C. — No Connection.
- Pin 25 — N.C. — No Connection.
- Pin 26 —  $R_{OUT}A$  — TTL output.
- Pin 27 — N.C. — No Connection.
- Pin 28 —  $V_{CC}$  — +5V Power Supply.

**FEATURES...**

The **SP306** is a single chip device that offers both RS422 and RS423 serial interfaces. The device can be programmed via two control mode pins (7 and 8). In either operating mode, the **SP306** provides two full-duplex channels. A loopback function is also provided for chip self-test, which connects driver outputs to receiver inputs with no external circuitry.

The RS422 drivers convert TTL logic levels into RS422 differential output signals. The RS422 line driver outputs feature high source

and sink current capability. The RS423 line drivers convert TTL logic levels into inverted RS423 output signals. All line drivers are internally protected against short circuits on their outputs.

The RS422 receivers convert the RS422 differential input signals into non-inverted TTL logic levels. Receiver input thresholds are  $\pm 200\text{mV}$ . The RS422 receivers can receive input data up to 1Mbps. The RS423 receivers convert the RS423 input signals into inverted TTL output logic levels. The RS423 receivers have an input threshold of  $\pm 200\text{mV}$ , and can receive data up to 100Kbps.

A loopback test mode is provided that puts the driver outputs into a high impedance tri-state level, and routes the driver outputs to their associated receiver inputs. In this configuration,

the signal path is non-inverting from the TTL driver inputs to the receiver TTL outputs. This operating mode allows the controlling system to perform diagnostic self-test of the RS422/423 transceiver circuitry at speeds up to 3Kbps.

### APPLICATION INFORMATION

#### Control Logic Configuration

Software control of the SP306 is via two select pins (7 and 8) and a loopback control pin (22). SELECT A and SELECT B allow the user to program the SP306 for four different interface modes. Loopback mode can be selected in any of these interface modes. The figures that follow outline the various operating modes that are supported by the SP306.

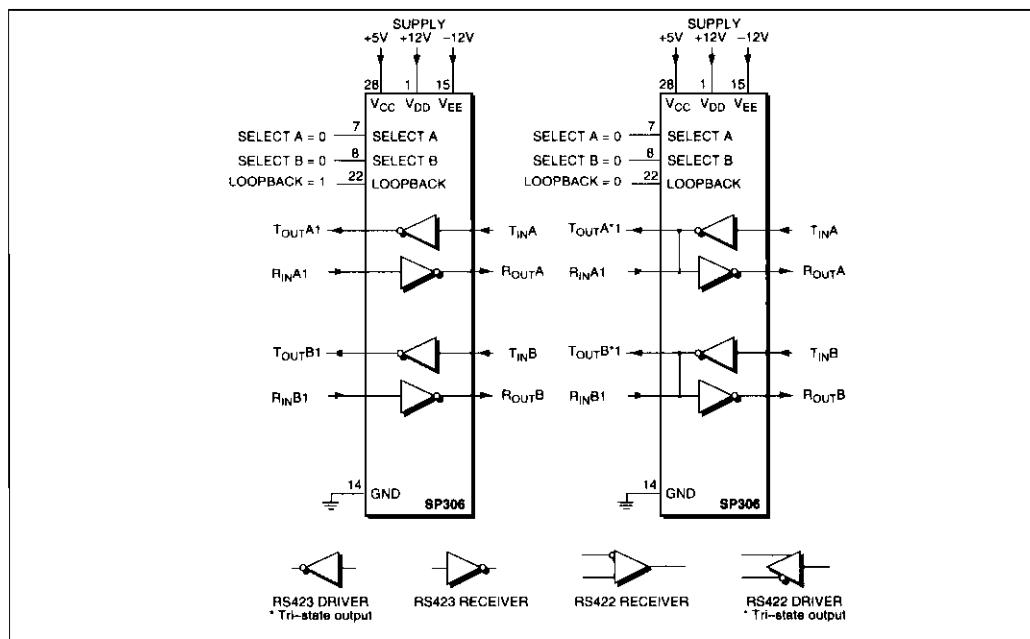


Figure 1. Control Input Configuration — SELECT A = 0, SELECT B = 0

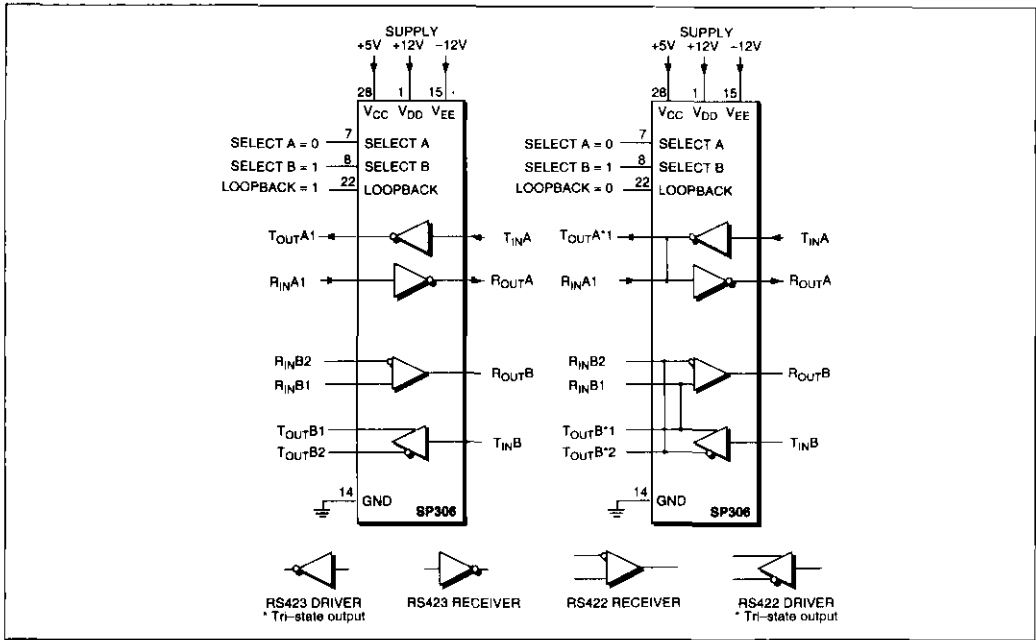


Figure 2. Control Input Configuration — SELECT A = 0, SELECT B = 1

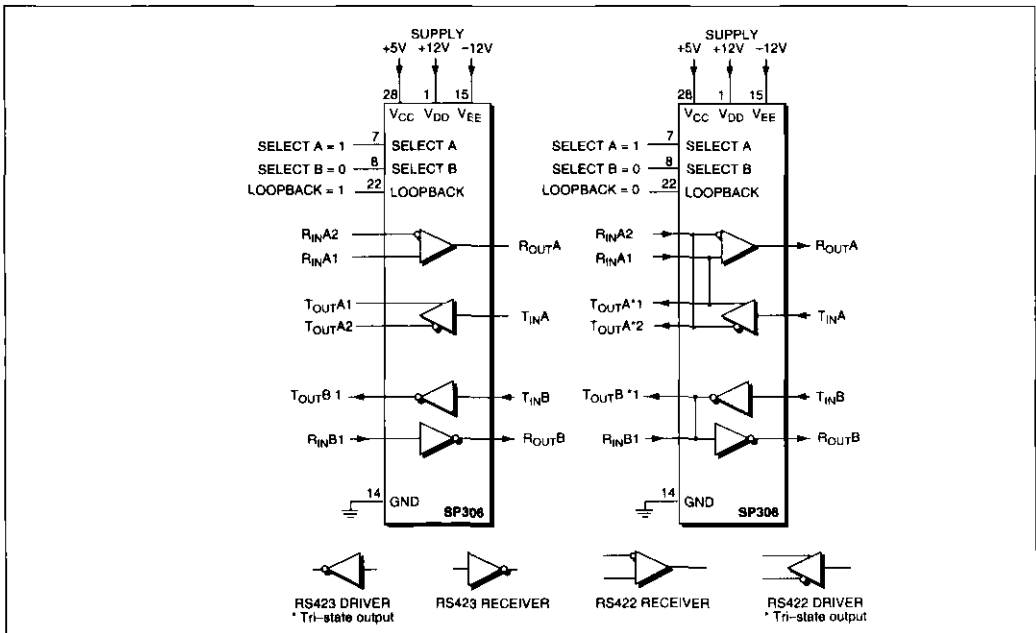


Figure 3. Control Input Configuration — SELECT A = 1, SELECT B = 0

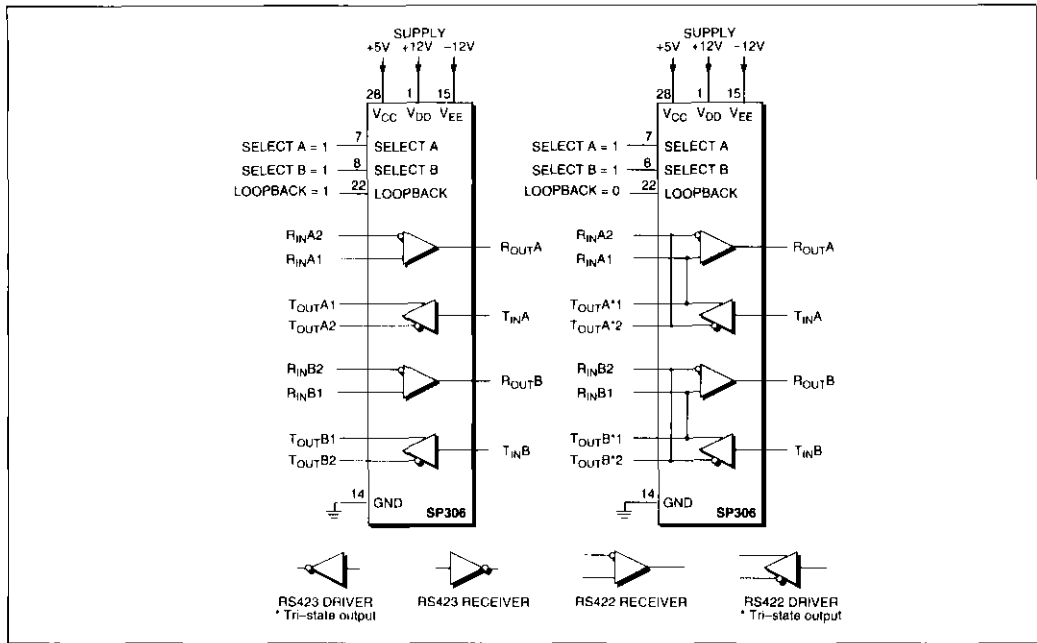


Figure 4. Control Input Configuration — SELECT A = 1, SELECT B = 1

## ORDERING INFORMATION

| Model                              | Temperature Range | Package                 |
|------------------------------------|-------------------|-------------------------|
| Two full-duplex channels RS422/423 |                   |                         |
| SP306CT                            | 0°C to +70°C      | 28-pin SOIC             |
| SP306MF                            | -55°C to +125°C   | 28-pin Ceramic Flatpack |