
# **Data sheet** 2139.0 ZB 16



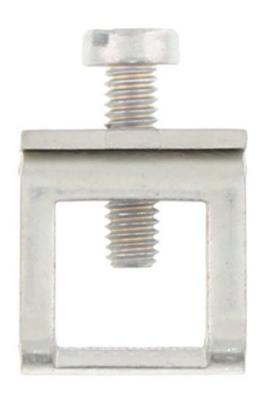

Clamping yoke, Screw connection, Mounting type: Can be screwed on, Rated cross-section: 16 mm², Colour: natural

#### **Business data**

| Bacilloco data                             |               |
|--|---------------|
| Article number                             | <u>2139.0</u> |
| Article name                               | ZB 16         |
| GTIN (EAN)                                 | 4044211049607 |
| Packaging unit                             | 50            |
| Quantity unit                              | PC            |
| Weight per piece (not including packaging) | 7.33 g        |
| Weight per piece (including packaging)     | 7.54 g        |
| Unit of weight                             | G             |
| Customs number                             | 85369010      |
| Country of origin                          | DE            |
| Product description                        | Clamping yoke |
| Colour                                     | Natural       |
|  |               |

## **Data sheet**





| Technical data  |                                   |
|---|-----------------------------------|
| Dimensions  |                                   |
| Length  | 15.5 mm                           |
| Width   | 10 mm                             |
| Height  | 16.5 mm                           |
| Ratings   |                                   |
| Rated cross-section                                     | 16 mm²                            |
| Connection data   |                                   |
| Connection principle                                    | Screw connection                  |
| Wire cross-section single-core (rigid) / stranded, min. | 2.5 mm <sup>2</sup>               |
| Wire cross-section single core (rigid)/stranded, max.   | 16 mm²                            |
| Wire cross-section stranded, min.                       | 2.5 mm <sup>2</sup>               |
| Wire cross-section stranded, max.                       | 16 mm²                            |
| Stripping length  | 16 mm                             |
| Screw head  | Slotted                           |
| Screw threading   | M 4                               |
| Tightening torque, min.                                 | 1.2 Nm                            |
| Tightening torque, max.                                 | 2 Nm                              |
| Materials   |                                   |
| Material  | Steel                             |
| Surface   | Galvanized, thick-film passivated |
| Screws  | Steel                             |
| Surface screw   | Galvanized, thick-film passivated |
| Further technical data                                  |                                   |
| Mounting type   | Screwable                         |
| Environmental Product Compliance                        |                                   |
| REACH Conform   | yes                               |
| REACH Reference date                                    | 2022-06-10                        |
| REACH Candidate Substance Note                          | No                                |
| RoHS Conform  | yes                               |

## **Data sheet**

2139.0 ZB 16



#### Media



## **Data sheet**





#### **Accessories**

#### Cap



Cap, Colour: Green-yellow

| Article number | Article name | GTIN (EAN)    | Packaging<br>unit |
|----------------|--------------|---------------|-------------------|
| 2489.1         | K 16 GNYE    | 4044211052867 | 50                |

#### **Neutral busbar**



Busbar, Material: Brass, Colour: natural

| Article number | Article name | GTIN (EAN)    | Packaging<br>unit |
|----------------|--------------|---------------|-------------------|
| 2128.0         | Ssch 10x3 MS | 4044211049478 | 1 M               |



Busbar, Material: Copper, Colour: natural

| Article number | Article name | GTIN (EAN)    | Packaging<br>unit |
|----------------|--------------|---------------|-------------------|
| 2129.0         | Ssch 10x3 CU | 4044211049485 | 1 M               |