

OPERATIONAL AMPLIFIER

GENERAL DESCRIPTION

The TCA520 is a bipolar integrated operational amplifier primarily intended for low-power, low-voltage applications and as a comparator in digital systems.

Features

- Wide supply voltage range
- Low supply voltage operation
- Low power consumption
- Low input bias current
- Offset compensation facility
- Frequency compensation facility
- High slew rate
- Large output voltage swing
- TTL compatible output

QUICK REFERENCE DATA

| | | | |
|---|------------|------|-----------------------|
| Supply voltage range | V_{CC} | | 2 to 20 V |
| Supply current | I_{CC} | typ. | 0,8 mA |
| Input bias current | I_{IB} | typ. | 60 nA |
| Output voltage range | V_Q | | 0,1 to $V_{CC}-0,1$ V |
| D.C. differential voltage amplification | A_{VD} | typ. | 15 000 |
| Slew rate | S_{VOAV} | typ. | 25 V/ μ s |
| Operating ambient temperature range | T_{amb} | | -25 to +85 °C |

PACKAGE OUTLINES

TCA520B : 8-lead DIL; plastic (SOT97).

TCA520D: 8-lead mini-pack; plastic (SO8; SOT96A).

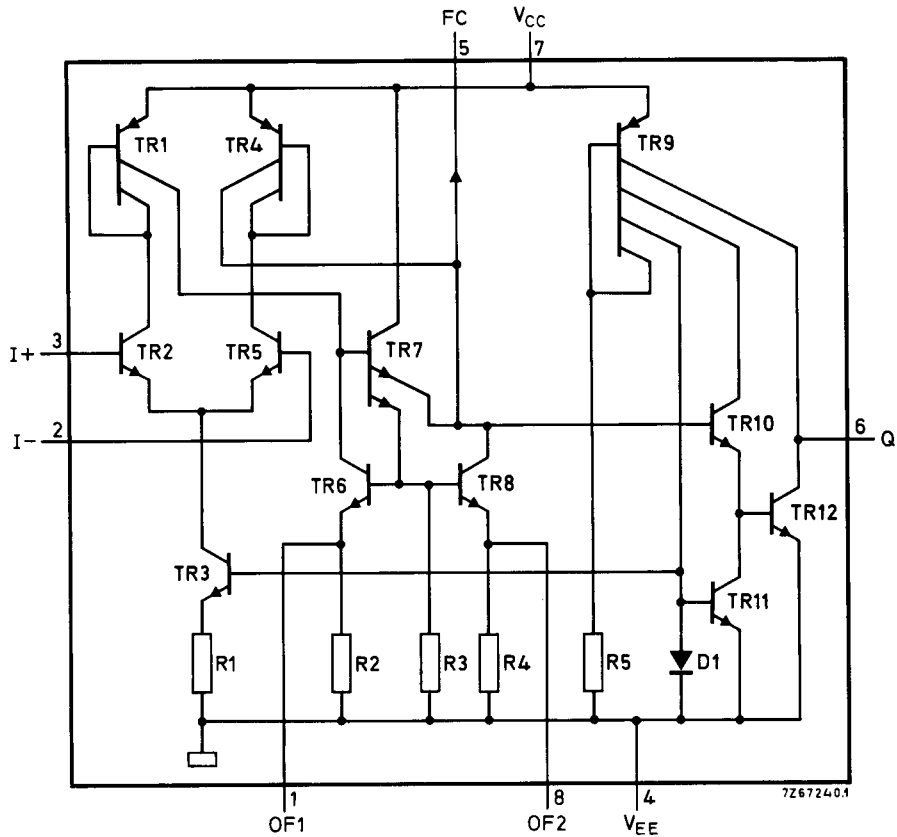


Fig. 1 Circuit diagram.

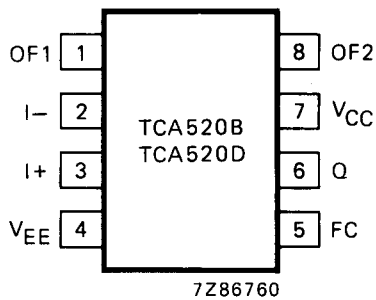


Fig. 2 Pinning diagram.

PINNING

- | | | |
|---|-----|-----------------------------------|
| 1 | OF1 | offset compensation connection |
| 2 | I- | inverting input |
| 3 | I+ | non-inverting input |
| 4 | VEE | ground connection |
| 5 | FC | frequency compensation connection |
| 6 | Q | output |
| 7 | VCC | positive supply connection |
| 8 | OF2 | offset compensation connection |

RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

| | | | |
|---|--------------|------|-------------------------------|
| Supply voltage, d.c. | V_{CC} | max. | 22 V |
| Input voltage | V_I | max. | V_{CC} V |
| | $-V_I$ | max. | 0 V |
| Differential input voltage | $\pm V_{ID}$ | max. | 2 V |
| Power dissipation at $T_{amb} = 85^\circ\text{C}$ | P_{tot} | max. | 200 mW |
| Storage temperature range | T_{stg} | | -55 to $+125^\circ\text{C}$ |
| Operating ambient temperature range | T_{amb} | | -25 to $+85^\circ\text{C}$ |

CHARACTERISTICS $V_{CC} = 5\text{ V}$; $V_{EE} = 0\text{ V}$; $T_{amb} = 25^\circ\text{C}$; R_L from Q to V_{CC} unless otherwise specified

| parameter | symbol | min. | typ. | max. | unit |
|---|-------------------|--------|--------|--------------|------------------------------|
| Supply V_{CC}: pin 7 | | | | | |
| Supply current, unloaded | I_{CC} | 0,5 | 0,8 | 1,2 | mA |
| Inputs I+ and I-; pins 3 and 2 | | | | | |
| Input voltage | V_I | 0,9 | — | $V_{CC}-0,5$ | V |
| Input bias current | I_{IB} | — | 60 | 250 | nA |
| Input offset voltage | V_{IO} | — | 1 | 6 | mV |
| Variation with temperature | ΔV_{IO} | — | 5 | — | $\mu\text{V}/\text{K}$ |
| Input offset current | I_{IO} | — | 10 | 75 | nA |
| Common-mode rejection ratio | kCMR | 70 | 100 | — | dB |
| Input noise voltage at $f = 1\text{ kHz}$ | $V_n(\text{rms})$ | — | 15 | — | $\text{nV}/\sqrt{\text{Hz}}$ |
| Input noise current at $f = 1\text{ kHz}$ | $I_n(\text{rms})$ | — | 0,4 | — | $\text{pA}/\sqrt{\text{Hz}}$ |
| Input noise angular frequency | f_c | — | 300 | — | Hz |
| Output Q; pin 6 | | | | | |
| Output voltage range at $R_L = 5\text{ k}\Omega$ | V_Q | 0,1 | — | $V_{CC}-0,1$ | V |
| Output current | | | | | |
| HIGH at $V_Q = V_{CC} - 0,4\text{ V}$ | $-I_{OH}$ | 100 | 200 | — | μA |
| LOW at $V_Q = 0,4\text{ V}$ | I_{OL} | 6 | 12 | — | mA |
| D.C. voltage amplification at $R_L = 5\text{ k}\Omega$ | A_{VD} | 10 000 | 15 000 | — | |
| A.C. voltage amplification at $f = 1\text{ kHz}$; $C_{FC} = 100\text{ pF}$ | A_{vd} | — | 58 | — | dB |
| Slew rate (average rate of change of the output voltage) at $R_L = 1\text{ k}\Omega$ $C_{FC} = 0\text{ pF}$ | S_{VOAV} | — | 25 | — | $\text{V}/\mu\text{s}$ |
| $C_{FC} = 100\text{ pF}$ | S_{VOAV} | — | 500 | — | $\text{mV}/\mu\text{s}$ |

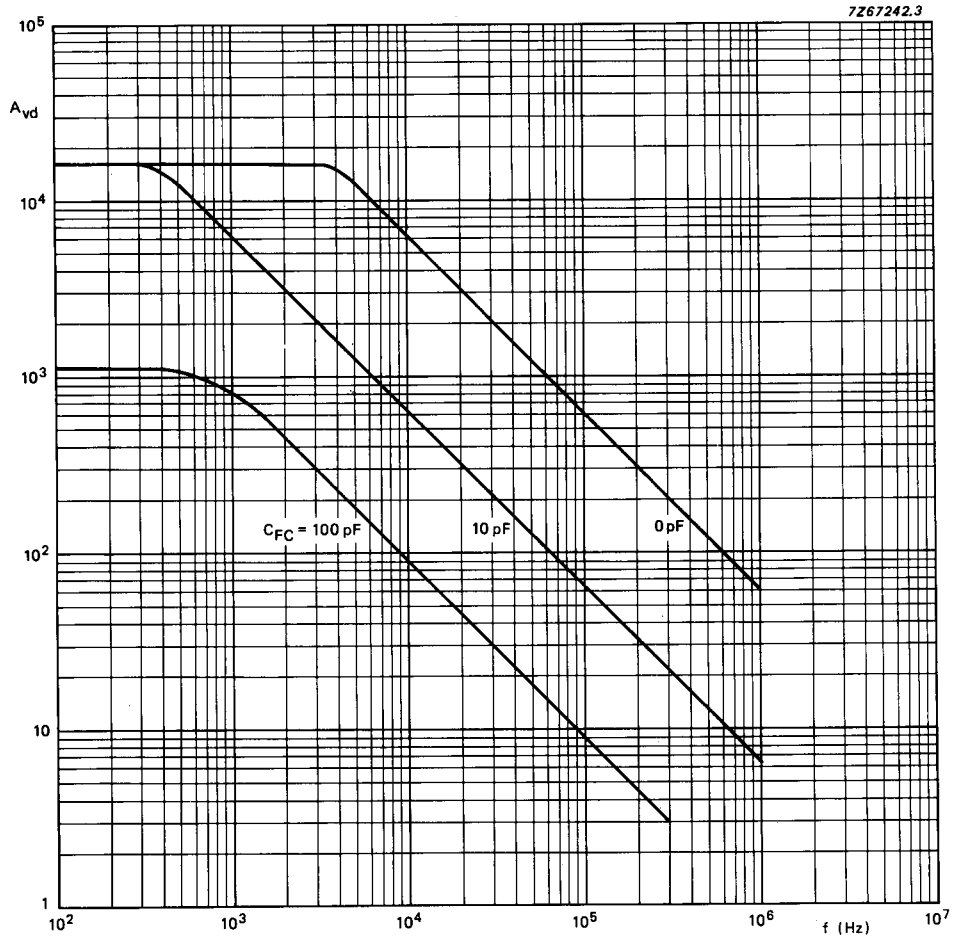


Fig. 3 Typical values of the open-loop voltage amplification as a function of frequency.

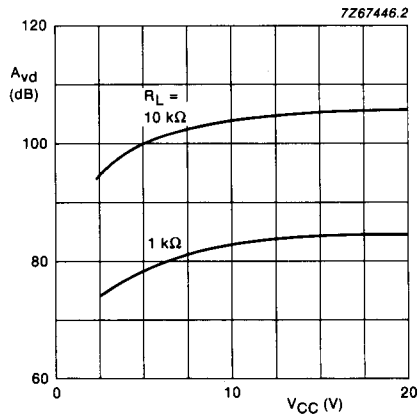


Fig. 4 Typical values of the open-loop voltage amplification as a function of supply voltage.

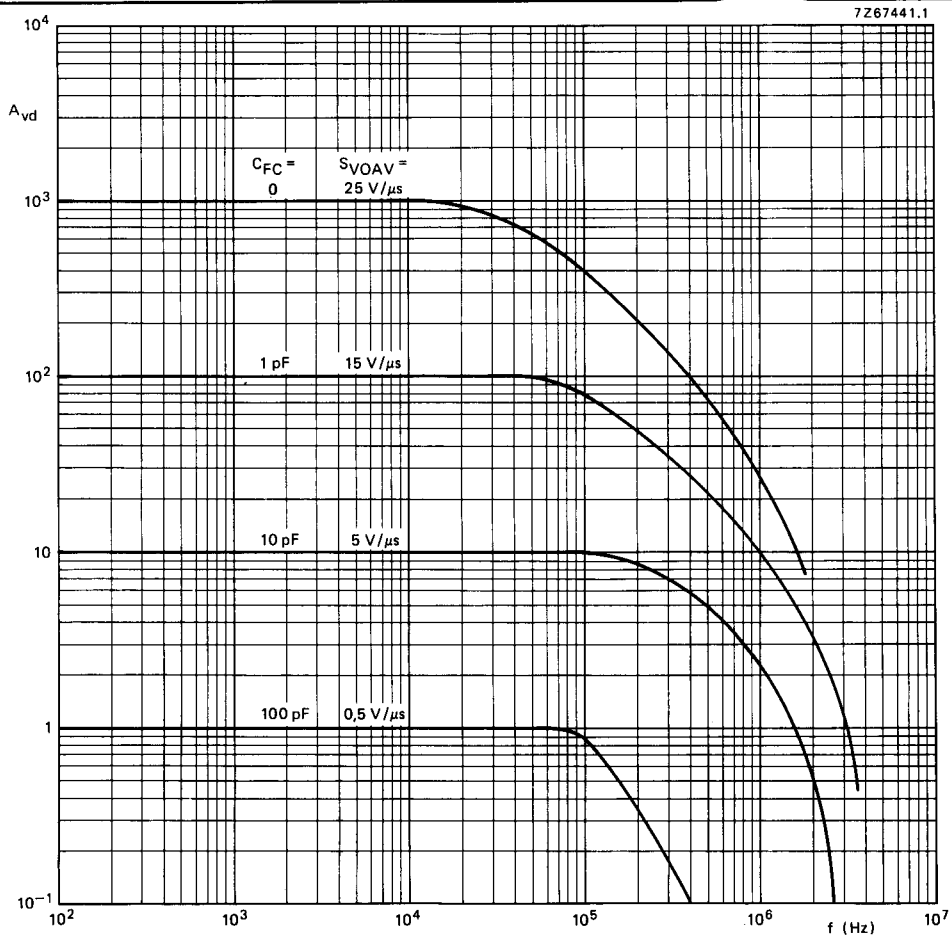


Fig. 5 Typical frequency response and slew rate for various closed-loop gains.

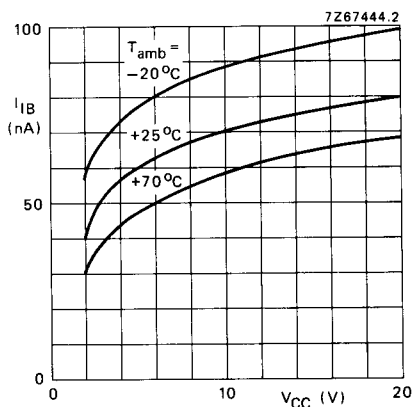


Fig. 6 Typical values of the input bias current as a function of supply voltage, with ambient temperature as a parameter.

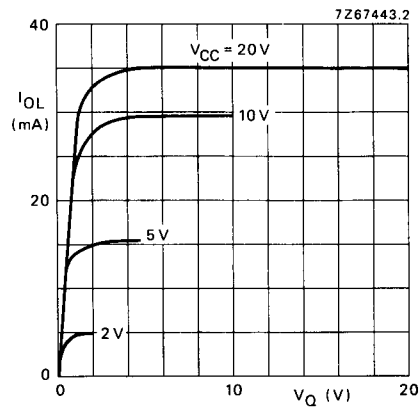


Fig. 7 Typical output current LOW as a function of output voltage, with supply voltage as a parameter.

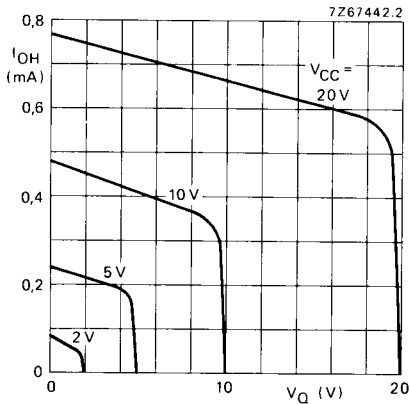


Fig. 8 Typical output current HIGH as a function of output voltage, with supply voltage as a parameter.

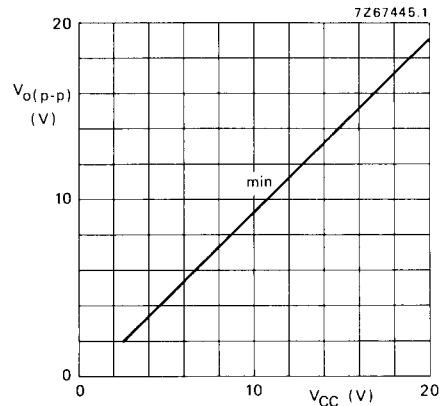


Fig. 9 Minimum values of the output voltage swing as a function of supply voltage for $R_L = 1 \text{ k}\Omega$.

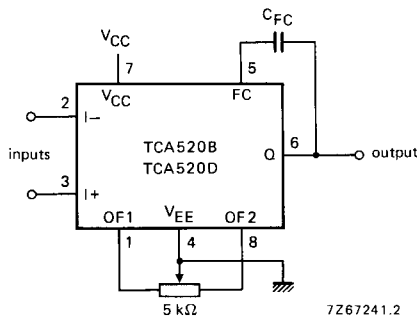


Fig. 10 Typical arrangement of the TCA520 with frequency and offset compensation.

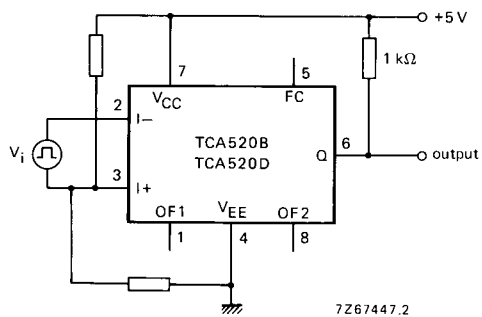


Fig. 11 Typical application of the TCA520 as a comparator; $|V_{2-3}|$ maximum 2 V.

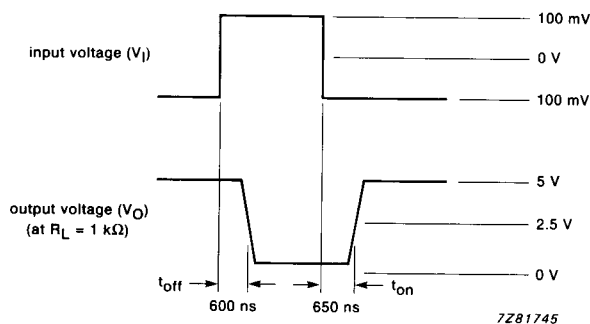


Fig. 12 Typical propagation delay time.