



Obsolescence Notice

This product is obsolete.

This information is available for your convenience only.

For more information on Zarlink's obsolete products and replacement product lists, please visit http://products.zarlink.com/obsolete_products/

Feb. 1985

Features

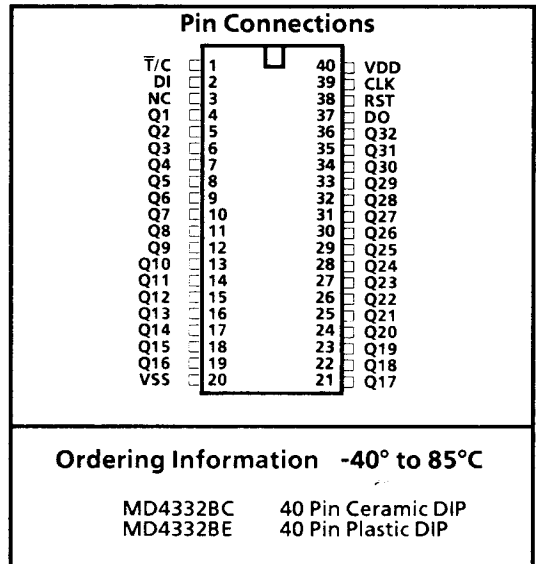
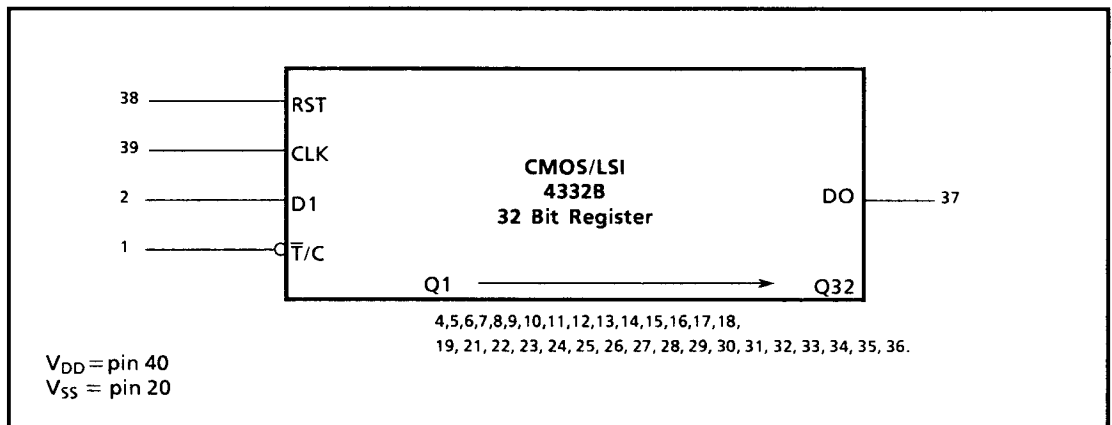
- CMOS Low power.
- 3 to 18 volt operation.
- On-chip wave-shaping.
- High-speed (typ. 3 MHz) shift register.

Applications

- Telephone displays.
- Instrumentation readouts.
- Microprocessor displays.
- Digital clock, counter.

Description

The MD4332B is a CMOS 32-bit static shift register incorporating selectable true/complement outputs for each bit. This device is well suited to drive LCD readouts directly since the AC signals required for the display may be generated simply by applying a low frequency signal directly to the True-Complement input pin and to the backplane of the display. The device can drive four 7-segment displays or two 14-segment alphanumeric displays plus decimal points or two 16-segment alphanumeric displays directly.


5

Figure 1. Logic Diagram

5-43

Absolute Maximum Ratings* - Voltages are with respect to ground (V_{SS}) unless otherwise stated.

	Parameter	Symbol	Min	Max	Units
1	DC Supply Voltage	V_{DD}	-0.5	18	V
2	Input Voltage	V_{IN}	-0.5	$V_{DD} + 0.5$	V
3	DC Current Drain per Pin	I		± 10	mA
4	Storage Temperature	T_{STG}	-65	+125	$^{\circ}C$
5	Power Dissipation	Plastic	P_D	0.6	W
		Ceramic	P_D	1.0	W

*Exceeding these values may cause permanent damage. Functional operation under these conditions is not implied.

Recommended Operating Conditions - Voltages are with respect to ground (V_{SS}) unless otherwise stated

	Characteristics	Sym	Min	Typ	Max	Units	Test Conditions
1	Supply Voltage	V_{DD}	3	5	18	V	
2	Input Voltage	V_I	0		V_{DD}	V	
3	Output Voltage	V_O	0		V_{DD}	V	
4	Operating Temperature	T_A	-40	25	85	$^{\circ}C$	

DC Electrical Characteristics[†] - Voltages are with respect to ground (V_{SS}) unless otherwise stated

	Characteristics	Sym	Min	Typ	Max	Units	Test Conditions
1	Quiescent Device Current	I_L		0.5	50	μA	$V_{DD} = 5V$
		I_L		1	100	μA	$V_{DD} = 10V$
2	Input Current	I_Z		10		ρA	
3	Noise Immunity (Any Input)	V_{NL}	1.5	2.25		V	$V_{DD} = 5V, V_{OUT} = 0.8V$
		V_{NH}	3	4.5		V	$V_{DD} = 10V, V_{OUT} = 1.0V$
4	Noise Immunity (Any Input)	V_{NH}	1.5	2.25		V	$V_{DD} = 5V, V_{OUT} = 4.2V$
		V_{NH}	3	4.5		V	$V_{DD} = 10V, V_{OUT} = 9.0V$
5	Output Low Voltage	V_{OL}		0	0.01	V	$V_{DD} = 5V$
		V_{OL}		0	0.01	V	$V_{DD} = 10V$
6	Output High Voltage	V_{OH}	4.99	5		V	$V_{DD} = 5V$
		V_{OH}	9.99	10		V	$V_{DD} = 10V$
7	Output Drive Current N-Channel	I_{DN}	0.8	1.7		mA	$V_{OUT} = 0.5V, V_{DD} = 5V$
		I_{DN}	1.0	3.0		mA	$V_{OUT} = 0.5V, V_{DD} = 10V$
8	Output Drive Current P-Channel	I_{DP}	0.35	-0.9		mA	$V_{OUT} = 4.5V, V_{DD} = 5V$
		I_{DP}	-0.8	-1.9		mA	$V_{OUT} = 9.5V, V_{DD} = 10V$
9	Output Drive Current N-Channel	I_{DN}	50	250		μA	$V_{OUT} = 0.5V, V_{DD} = 10V$
		I_{DP}	-50	-250		μA	$V_{OUT} = 9.5V, V_{DD} = 10V$

[†] $T_A = 25^{\circ}C$

AC Electrical Characteristics[†] - Voltages are with respect to ground (V_{SS}) unless otherwise stated

	Characteristics	Sym	Min	Typ	Max	Units	Test Conditions
1	Propagation Delay Time	t_{PHL}		300		ns	$V_{DD} = 10V$
		t_{PLH}		300		ns	$V_{DD} = 10V$
2	Transition Time	t_{THL}		70	130	ns	$V_{DD} = 10V, DO$ ($C_L = 50pF$)
		t_{TLH}		300		ns	$V_{DD} = 10V, Q1-Q32$ ($C_L = 15pF$)
3	Maximum Clock Frequency	f_{CL}	1.0	3.0		MHz	$V_{DD} = 10V$
4	Minimum Clock Pulse Width	t_{WL}		200		ns	$V_{DD} = 10V$
		t_{WH}		200		ns	$V_{DD} = 10V$
5	Minimum Reset Pulse Width	$t_{WH(R)}$		200		ns	$V_{DD} = 10V$
6	Input Capacitance	C_i		5		pF	Any Input

[†] $T_A = 25^{\circ}C$, $C_L = 50 pF$. Typical temperature coefficient for all values of $V_{DD} = 0.3\%$ per $^{\circ}C$. All input rise and fall times = 20ns.

Pin Description

Pin #	Name	Description
1	\bar{T}/C	True/Complement Input. This is the control input to select the form of logic (True/complementary) used by the outputs (Q1-Q32).
2	DI	Serial Data Input. This is the serial data input of the internal shift register.
3	NC	No Connection.
4-19	Q1-Q16	True/Complement Outputs. These are the parallel outputs of the internal 32-bit shift register.
20	V_{SS}	Ground 0V.
21-36	Q17-Q32	True/Complement Outputs. These are the parallel outputs of the internal 32-bit shift register.
37	DO	Serial Data Output. This can be connected to the DI input of another MD4332B to form longer shift register.
38	RST	Master Reset Input. A logic high on this input resets the device.
39	CLK	Clock Input. The clock input is positive edge-triggered.
40	VDD	Positive Power Supply . 3V-18V operation.



Functional Description

The MD4332B is a CMOS/LSI static shift register designed to drive all types of LCD readouts directly or as serial-to-parallel converter where both the true and complementary parallel outputs are available.

The circuit accepts a serial input DI which is shifted into the register on the positive transition of the clock (CLK) input. A feature of this circuit is that the clock input and the true/complement control (\bar{T}/C) input have wave-shaping circuits to ensure fast edges on-chip regardless of the shape of the incoming signals.

The 4332B has asynchronous reset (RST) inputs which are active logic-level HIGH.

The parallel outputs of the shift register are available in either true or complementary form dependent on the state of the true-complement control input. When input is logic-level LOW, the true form is available at all parallel outputs and when the input goes HIGH, the parallel outputs immediately revert to the complementary form of the data stored in the register. This action is independent of the clock input condition. A serial data (DO) output is provided for applications using longer shift registers, etc. This output is the true form of the last stage of the register.

Application

