

□ MN101E35 Series

Type	MN101E35A	MN101E35D	MN101EF35A	MN101EF35D	MN101EF35G
Internal ROM type	Mask ROM		FLASH		
ROM (byte)	32K	68K	32K	64K+4K	128K+4K
RAM (byte)	4K				8K
Package (Lead-free)	TQFP048-P-0707B			HQFP048-P-0707B, TQFP048-P-0707B	HQFP048-P-0707B
Minimum Instruction Execution Time	0.042 μ s (at 2.2 V to 3.6 V, 24 MHz, When USB unused) 0.0625 μ s (at 3.0 V to 3.6 V, 16 MHz, When USB used) 62.5 μ s (at 2.2 V to 3.6 V, 32 kHz)				

■ Interrupts

RESET. Watchdog. External 0 to 4. External 5 (key interrupt dedicated). External 6. Timer 0 to 4. Timer 6. Timer 7 (2 systems). Timer 8 (2 systems). Timer 9 (2 systems). Time base. Serial 1 (2 systems). Serial 2 (2 systems). Serial 4 (2 systems). A/D conversion finish. USB interrupts

■ Timer Counter

8-bit timer \times 6

Timer 0Square-wave output. PWM output. Event count. Simple pulse width measurement. Square-wave/PWM output to large current terminal P03 (TM0IOB) possible

Timer 1Square-wave output. Event count

Timer 2Square-wave output. PWM output. Event count. Simple pulse width measurement. Square-wave/PWM output to large current terminal P03 (TM2IOB) possible

Timer 3Square-wave output. Event count

Timer 4Square-wave output. PWM output. Event count. Simple pulse width measurement. Square-wave/PWM output to large current terminal P02 (TM4IOC) possible

Timer 68-bit freerun timer

Timer 0, 1 can be cascade-connected

Timer 2, 3 can be cascade-connected

Timer 0, 1, 2 can be cascade-connected

Timer 0, 1, 2, 3 can be cascade-connected

16-bit timer \times 3

Timer 7Square-wave output. PWM output (cycle/duty continuous variable). Event count. Pulse width measurement. Input capture. Square-wave/PWM output to large current terminal P00 (TM7IOB) possible

Timer 8Square-wave output. PWM output (cycle/duty continuous variable). Event count. Pulse width measurement. Input capture. Square-wave/PWM output to large current terminal P01 (TM8IOB) possible

Timer 9Square-wave output. PWM output (cycle/duty continuous variable). Event count. Pulse width measurement. Input capture

Time base timer: One-minute count setting

Watchdog timer \times 1

■ Serial interface

Synchronous type/UART (full-duplex) \times 2: Serial 1, 2

Synchronous type/Multi-master I²C \times 1: Serial 4

Serial 4.....7-bit/10-bit address setting. General call

■ USB Functions

Conforms to USB 2.0: Full-speed (12 Mbps) supported

USB transceiver built-in. 3 end points (FIFO built-in independently)

FIFO size: EP0 = 16 bytes. EP1 = 128 bytes. EP2 = 128 bytes

EP0: Control transfer. IN/OUT (two ways)

EP1 to EP2: Interrupt/Bulk/Isochronous transfer supported. Settable to IN or OUT. Double Buffering function supported

When the MAXP size is set to a half or less of the MAXFIFO size for each EP, the Double Buffering function is made valid automatically

■ I/O Pins

I/O 37: Common use. Specified pull-up resistor available. Input/output selectable (bit unit)

■ A/D converter

10-bit \times 8 channels (with S/H)

MN101E35A, MN101E35D, MN101EF35A, MN101EF35D, MN101EF35G □

Extended Calculation

16-bit × 16-bit multiplication. 32-bit / 16-bit division

Special Ports


USB ports (D+, D-). Buzzer output. Remote control carrier output. High-current drive port. Clock output

ROM Correction

Correcting address designation: Up to 7 addresses possible

Pin Assignment

HQFP048-P-0707B, TQFP048-P-0707B

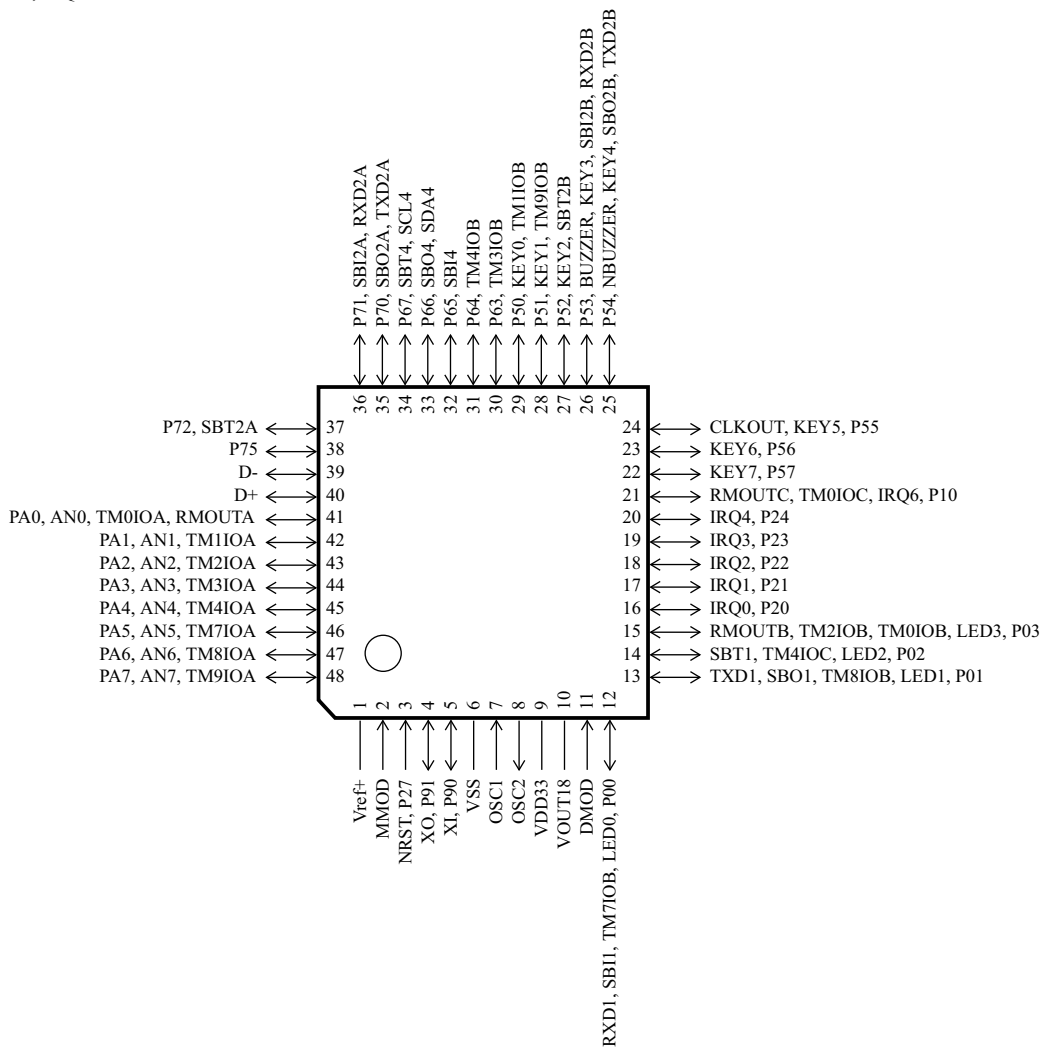

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for general applications (such as office equipment, communications equipment, measuring instruments and household appliances), or for specific applications as expressly stated in this book. Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automotive equipment, traffic signaling equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.It is to be understood that our company shall not be held responsible for any damage incurred as a result of or in connection with your using the products described in this book for any special application, unless our company agrees to your using the products in this book for any special application.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.

Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.