



PZ1SMAF2V5B ~ PZ1SMAF75B Series

SILICON ZENER DIODE

Voltage

2.5~75 V

Power

1 W



Features

- Silicon planar Zener diode
- Low profile surface-mount package
- Low leakage current
- Excellent stability
- High temperature soldering: 260 °C/10 seconds at terminals
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case: SMAF, plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Approx. Weight: 0.001 ounces, 0.032 grams

SMAF



Maximum Ratings and Thermal Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
Peak Pulse Power Dissipation at $T_A = 25^\circ\text{C}$	$P_D^{(1)}$	1	W
ESD Voltage per IEC61000-4-2 (Air)	V_{ESD}	± 30	kV
ESD Voltage per IEC61000-4-2 (Contact)	V_{ESD}	± 30	kV
Typical Thermal Resistance	$R_{\theta JA}^{(2)}$	150	$^\circ\text{C/W}$
Operating Junction Temperature Range	T_J	-55 to +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150	$^\circ\text{C}$



PZ1SMAF2V5B ~ PZ1SMAF75B Series

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Part Number	Nominal Zener Voltage				Nominal Zener Impedance				Max. Reverse Leakage Current		Marking Code
	$V_Z @ I_{ZT}$				$Z_{ZT} @ I_{ZT}$		$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$		
	Nom. V	Min. V	Max. V	mA	Ω	mA	Ω	mA	μA	V	
PZ1SMAF2V5B	2.5	2.37	2.63	40	15	40	1500	1	200	0.7	F2V5B
PZ1SMAF3V6B	3.6	3.42	3.78	100	8	100	400	1	100	1	F3V6B
PZ1SMAF3V9B	3.9	3.71	4.10	100	8	100	400	1	50	1	F3V9B
PZ1SMAF4V3B	4.3	4.09	4.52	100	7	100	400	1	25	1	F4V3B
PZ1SMAF4V7B	4.7	4.47	4.94	100	7	100	400	1	10	1	F4V7B
PZ1SMAF5V1B	5.1	4.85	5.36	100	6	100	550	1	5	1	F5V1B
PZ1SMAF5V6B	5.6	5.32	5.88	100	4	100	600	1	10	2	F5V6B
PZ1SMAF6V0B	6	5.7	6.3	100	3	100	600	1	8	2	F6V0B
PZ1SMAF6V2B	6.2	5.89	6.51	100	3	100	700	1	5	2	F6V2B
PZ1SMAF6V8B	6.8	6.46	7.14	100	3	100	700	1	10	3	F6V8B
PZ1SMAF7V5B	7.5	7.13	7.88	100	2	100	700	0.5	50	3	F7V5B
PZ1SMAF8V2B	8.2	7.79	8.61	100	2	100	700	0.5	10	3	F8V2B
PZ1SMAF8V7B	8.7	8.27	9.14	50	3	50	700	0.5	10	4	F8V7B
PZ1SMAF9V1B	9.1	8.65	9.56	50	4	50	700	0.5	10	5	F9V1B
PZ1SMAF10B	10	9.50	10.50	50	4	50	700	0.25	7	7.5	F10VB
PZ1SMAF11B	11	10.45	11.55	50	7	50	700	0.25	4	8.2	F11VB
PZ1SMAF12B	12	11.40	12.60	50	7	50	700	0.25	3	9.1	F12VB
PZ1SMAF13B	13	12.35	13.65	50	10	50	700	0.25	2	10	F13VB
PZ1SMAF14B	14	13.30	14.70	50	10	50	700	0.25	2	11	F14VB
PZ1SMAF15B	15	14.25	15.75	50	10	50	700	0.25	1	11	F15VB
PZ1SMAF16B	16	15.20	16.80	25	15	25	700	0.25	1	12	F16VB
PZ1SMAF17B	17	16.15	17.85	25	15	25	750	0.25	1	13	F17VB
PZ1SMAF18B	18	17.10	18.90	25	15	25	750	0.25	1	13	F18VB
PZ1SMAF19B	19	18.05	19.95	25	15	25	750	0.25	1	14	F19VB
PZ1SMAF20B	20	19.00	21.00	25	15	25	750	0.25	1	15	F20VB
PZ1SMAF22B	22	20.90	23.10	25	15	25	750	0.25	1	16	F22VB
PZ1SMAF24B	24	22.80	25.20	25	15	25	750	0.25	1	18	F24VB
PZ1SMAF25B	25	23.75	26.25	25	15	25	750	0.25	1	19	F25VB
PZ1SMAF27B	27	25.65	28.35	25	15	25	750	0.25	1	20	F27VB



PZ1SMAF2V5B ~ PZ1SMAF75B Series

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Part Number	Nominal Zener Voltage				Nominal Zener Impedance				Max. Reverse Leakage Current		Marking Code
	$V_Z@I_{ZT}$				$Z_{ZT}@I_{ZT}$		$Z_{ZK}@I_{ZK}$		$I_R@V_R$		
	Nom. V	Min. V	Max. V	mA	Ω	mA	Ω	mA	uA	V	
PZ1SMAF28B	28	26.60	29.40	25	15	25	1000	0.25	1	21	F28VB
PZ1SMAF30B	30	28.50	31.50	25	15	25	1000	0.25	1	22	F30VB
PZ1SMAF33B	33	31.35	34.65	25	15	25	1000	0.25	1	24	F33VB
PZ1SMAF36B	36	34.20	37.80	10	40	10	1000	0.25	1	27	F36VB
PZ1SMAF39B	39	37.05	40.95	10	40	10	1000	0.25	1	30	F39VB
PZ1SMAF43B	43	40.85	45.15	10	45	10	1500	0.25	1	33	F43VB
PZ1SMAF47B	47	44.65	49.35	10	45	10	1500	0.25	1	36	F47VB
PZ1SMAF51B	51	48.45	53.55	10	60	10	1500	0.25	1	39	F51VB
PZ1SMAF56B	56	53.20	58.80	10	60	10	2000	0.25	1	43	F56VB
PZ1SMAF62B	62	58.90	65.10	10	80	10	2000	0.25	1	47	F62VB
PZ1SMAF68B	68	64.60	71.40	10	80	10	2000	0.25	1	51	F68VB
PZ1SMAF75B	75	71.25	78.75	10	100	10	2000	0.25	1	56	F75VB

NOTES:

1. Mounted on a 5mm^2 copper pads to each terminal.
2. Mounted on a FR-4 PCB, single-sided copper, mini pad .



PZ1SMAF2V5B ~ PZ1SMAF75B Series

TYPICAL CHARACTERISTIC CURVES

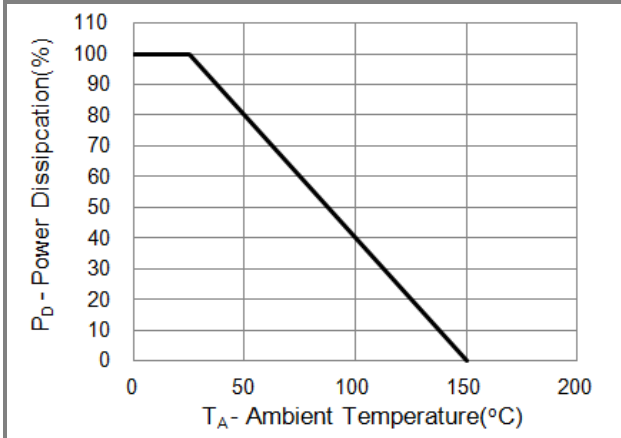


Fig.1 Power Derating Curve

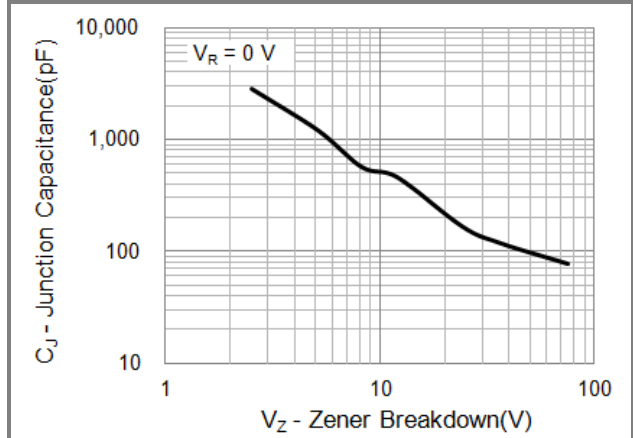


Fig.2 Typical Junction Capacitance

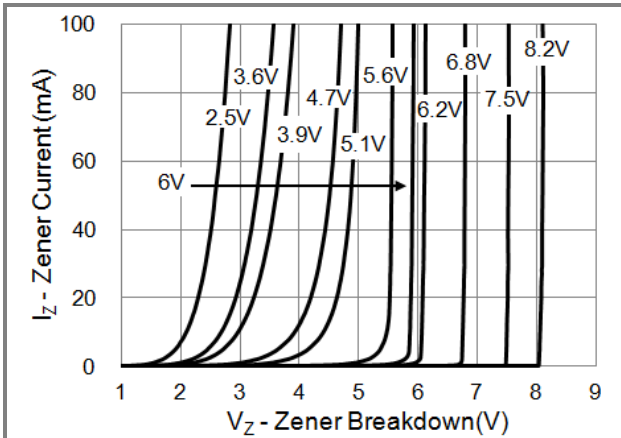


Fig.3 Typical Zener Breakdown

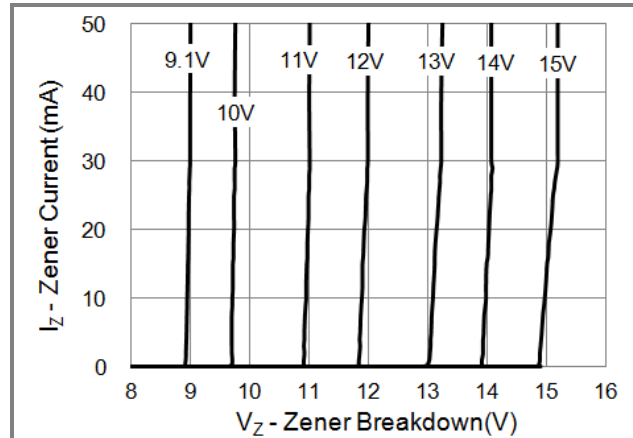


Fig.4 Typical Zener Breakdown

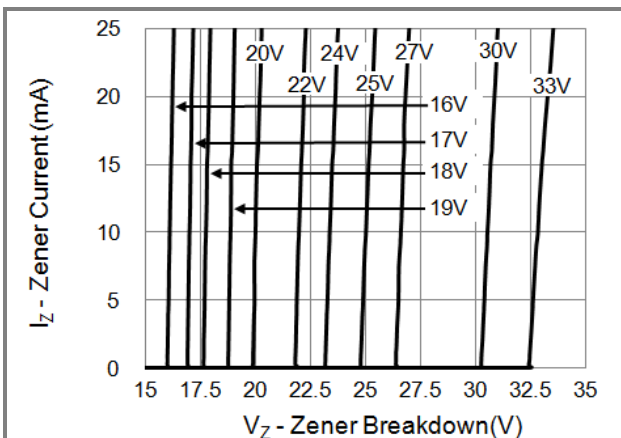


Fig.5 Typical Zener Breakdown

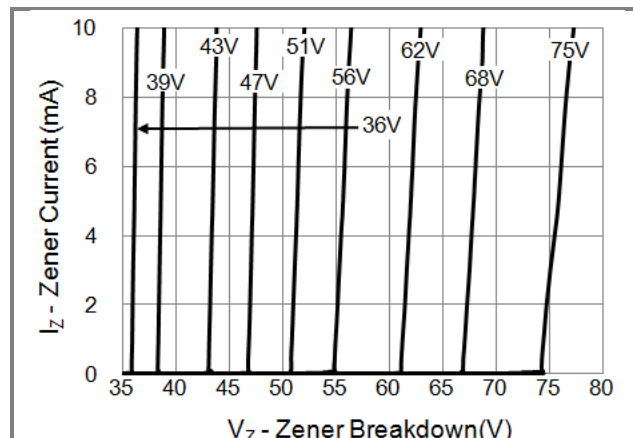


Fig.6 Typical Zener Breakdown





PZ1SMAF2V5B ~ PZ1SMAF75B Series

Part No Packing Code Version

Part No Packing Code	Package Type	Packing Type	Marking	Version
PZ1SMAFxxxB_R1_00001	SMAF	3K pcs / 7" reel	See Table	Halogen free

Packaging Information & Mounting Pad Layout

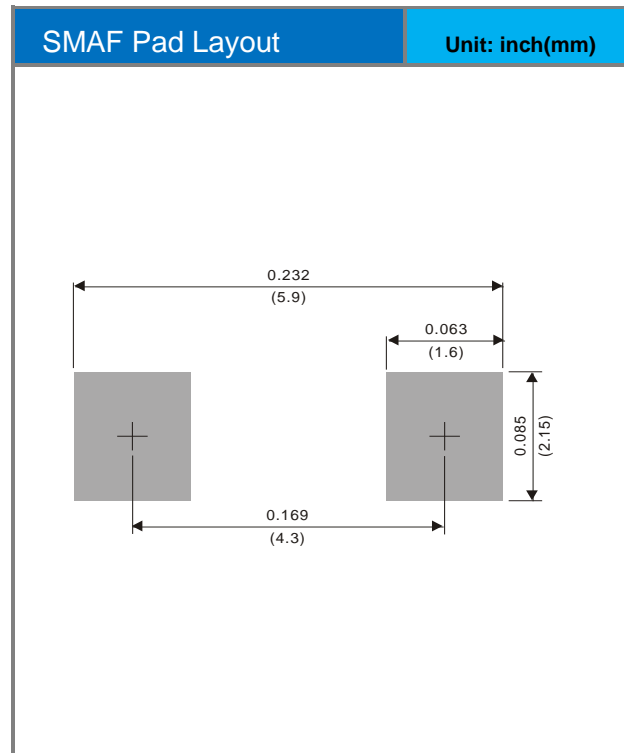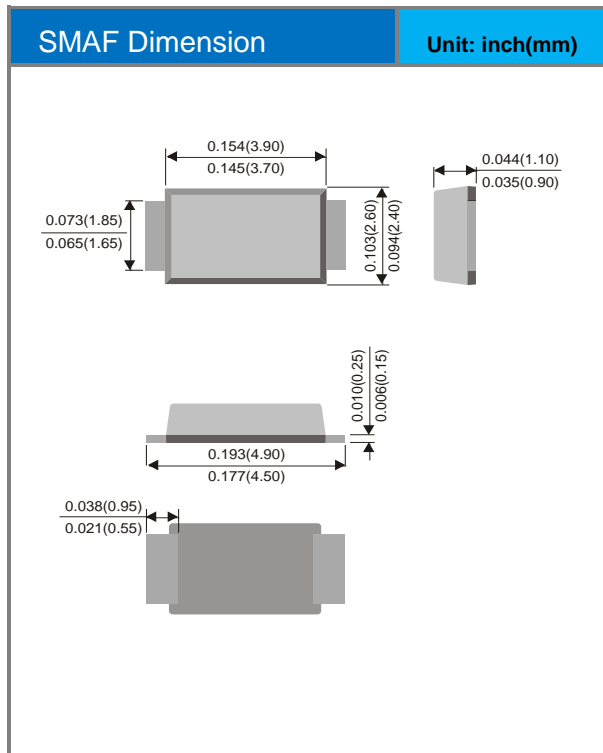



PZ1SMAF2V5B ~ PZ1SMAF75B Series

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.