



DESCRIPTION

This new series of digital transistors is designed to replace a single device and its external resistor bias network. The BRT (Bias Resistor Transistor) contains a single transistor with a monolithic bias network consisting of two resistors; a series base resistor and a base-emitter resistor. The BRT eliminates these individual components by integrating them into a single device. The use of a BRT can reduce both system cost and board space. The device is housed in the SC-89 package which is designed for low power surface mount applications.

The DTC114EE~DTC144WE is available in SC-89 Package


ORDERING INFORMATION

| Package Type | Part Number |
|--|--------------------|
| SC-89 | DTC114EE |
| | DTC124EE |
| | DTC144EE |
| | DTC114YE |
| | DTC114TE |
| | DTC143TE |
| | DTC123EE |
| | DTC143EE |
| | DTC143ZE |
| | DTC124XE |
| | DTC123JE |
| | DTC115EE |
| | DTC144WE |
| Note | SPQ: 3,000pcs/Reel |
| AiT provides all RoHS Compliant Products | |

FEATURES

- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- The SC-89 package can be soldered using wave or reflow. The modified gull-winged leads absorb thermal stress during soldering eliminating the possibility of damage to the die.
- Available in SC-89 Package

PIN DESCRIPTION

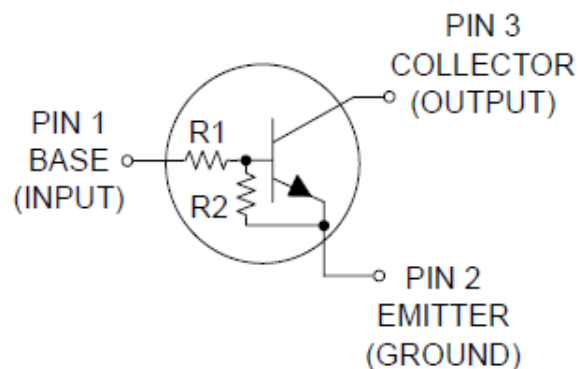



ABSOLUTE MAXIMUM RATINGS

T_A = 25°C, unless otherwise noted

| | |
|--|---------|
| V _{CBO} , Collector-Base Voltage | 50Vdc |
| V _{CEO} , Collector-Emitter Voltage | 50Vdc |
| I _C , Collector Current | 100mAdc |

Stresses above may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the Electrical Characteristics are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

THERMAL CHARACTERISTICS

| Parameter | Symbol | Value | Unit |
|---|-----------------------------------|-------------|-------------|
| Total Device Dissipation, FR-4 Board ^{NOTE1} @ T _A = 25°C Derate above 25°C | P _D | 200 1.6 | mW mW/°C |
| Thermal Resistance, Junction-to-Ambient ^{NOTE1} | R _{θJA} | 600 | °C/W |
| Total Device Dissipation, FR-4 Board ^{NOTE2} @ T _A = 25°C Derate above 25°C | P _D | 300 2.4 | mW mW/°C |
| Thermal Resistance, Junction-to-Ambient ^{NOTE2} | R _{θJA} | 400 | °C/W |
| Junction and Storage Temperature Range | T _J , T _{STG} | -55 to +150 | °C |

NOTE1: FR-4 @ Minimum Pad

NOTE2: FR-4 @ 1.0 × 1.0 Inch Pad



ELECTRICAL CHARACTERISTICS

T_A = 25°C, unless otherwise noted

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|--|----------------------|--|----------|------|------|------|
| OFF CHARACTERISTICS | | | | | | |
| Collector-Base Cutoff Current | I _{CB0} | V _{CB} = 50 V, I _E = 0 | | | 100 | nAdc |
| Collector-Emitter Cutoff Current | I _{CE0} | V _{CE} = 50 V, I _B = 0 | | | 500 | nAdc |
| Emitter-Base Cutoff Current | I _{EBO} | V _{EB} = 6.0 V, I _C = 0 | DTC114EE | | 0.5 | mAdc |
| | | | DTC124EE | | 0.2 | |
| | | | DTC144EE | | 0.1 | |
| | | | DTC114YE | | 0.2 | |
| | | | DTC114TE | | 0.9 | |
| | | | DTC143TE | | 1.9 | |
| | | | DTC123EE | | 2.3 | |
| | | | DTC143EE | | 1.5 | |
| | | | DTC143ZE | | 0.18 | |
| | | | DTC124XE | | 0.13 | |
| | | | DTC123JE | | 0.2 | |
| | | | DTC115EE | | 0.05 | |
| DTC144WE | | 0.13 | | | | |
| Collector-Base Breakdown Voltage | V _{(BR)CBO} | I _C = 10μA, I _E = 0 | 50 | | | Vdc |
| Collector-Emitter Breakdown Voltage ^{NOTE3} | V _{(BR)CEO} | I _C = 2.0mA, I _B = 0 | 50 | | | Vdc |
| ON CHARACTERISTICS ^{NOTE3} | | | | | | |
| DC Current Gain | h _{FE} | V _{CE} =10V, I _C =5.0mA | DTC114EE | 35 | 60 | |
| | | | DTC124EE | 60 | 100 | |
| | | | DTC144EE | 80 | 140 | |
| | | | DTC114YE | 80 | 140 | |
| | | | DTC114TE | 160 | 350 | |
| | | | DTC143TE | 160 | 350 | |
| | | | DTC123EE | 8.0 | 15 | |
| | | | DTC143EE | 15 | 30 | |
| | | | DTC143ZE | 80 | 200 | |
| | | | DTC124XE | 80 | 150 | |
| | | | DTC123JE | 80 | 140 | |
| | | | DTC115EE | 80 | 150 | |
| DTC144WE | 80 | 140 | | | | |



| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|--------------------------------------|---------------|--|------|------|------|------|
| Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | $I_C = 10mA, I_B = 0.3mA$ | | | | |
| | | $I_C = 10mA, I_B = 5mA$ | | | | |
| | | $I_C = 10mA, I_B = 1mA$ | | | 0.25 | Vdc |
| Output Voltage (on) | V_{OL} | $V_{CC} = 5.0V, V_B = 2.5V, R_L = 1.0k\Omega$ | | | 0.2 | Vdc |
| | | | | 0.2 | | |
| | | | | 0.2 | | |
| | | | | 0.2 | | |
| | | | | 0.2 | | |
| Output Voltage (off) | V_{OH} | $V_{CC} = 5.0V, V_B = 0.5V, R_L = 1.0k\Omega$ | | | | Vdc |
| | | $V_{CC} = 5.0V, V_B = 0.25V, R_L = 1.0k\Omega$ | | 4.9 | | |
| | | | | | | |
| | | | | | | |



| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|-------------------|--------|----------------|-------|--|-------|------|
| Input Resistor | R1 | DTC114EE | 7.0 | 10 | 13 | kΩ |
| | | DTC124EE | 15.4 | 22 | 28.6 | |
| | | DTC144EE | 32.9 | 47 | 61.1 | |
| | | DTC114YE | 7.0 | 10 | 13 | |
| | | DTC114TE | 7.0 | 10 | 13 | |
| | | DTC143TE | 3.3 | 4.7 | 6.1 | |
| | | DTC123EE | 1.5 | 2.2 | 2.9 | |
| | | DTC143EE | 3.3 | 4.7 | 6.1 | |
| | | DTC143ZE | 3.3 | 4.7 | 6.1 | |
| | | DTC124XE | 15.4 | 22 | 28.6 | |
| | | DTC123JE | 1.54 | 2.2 | 2.86 | |
| | | DTC115EE | 70 | 100 | 130 | |
| | | DTC144WE | 32.9 | 47 | 61.1 | |
| | | Resistor Ratio | R1/R2 | DTC114EE/DTC124E/ DTC144EE/DTC115EE | 0.8 | |
| DTC114YE | 0.17 | | | 0.21 | 0.25 | |
| DTC143TE/DTC114TE | - | | | - | - | |
| DTC123EE/DTC143EE | 0.8 | | | 1.0 | 1.2 | |
| DTC143ZE | 0.055 | | | 0.1 | 0.185 | |
| DTC124XE | 0.38 | | | 0.47 | 0.56 | |
| DTC123JE | 0.038 | | | 0.047 | 0.056 | |
| DTC144WE | 1.7 | | | 2.1 | 2.6 | |

NOTE3: Pulse Test: Pulse Width < 300 us, Duty Cycle < 2.0%

RESISTOR VALUES

| Device | R1 (k) | R2 (k) |
|----------|--------|--------|
| DTC114EE | 10 | 10 |
| DTC124EE | 22 | 22 |
| DTC144EE | 47 | 47 |
| DTC114YE | 10 | 47 |
| DTC114TE | 10 | ∞ |
| DTC143TE | 4.7 | ∞ |
| DTC123EE | 2.2 | 2.2 |
| DTC143EE | 4.7 | 4.7 |
| DTC143ZE | 4.7 | 47 |
| DTC124XE | 22 | 47 |
| DTC123JE | 2.2 | 47 |
| DTC115EE | 100 | 100 |
| DTC144WE | 47 | 22 |



TYPICAL CHARACTERISTICS

DTC114EE

Figure 1. $V_{CE(sat)}$ vs. I_C

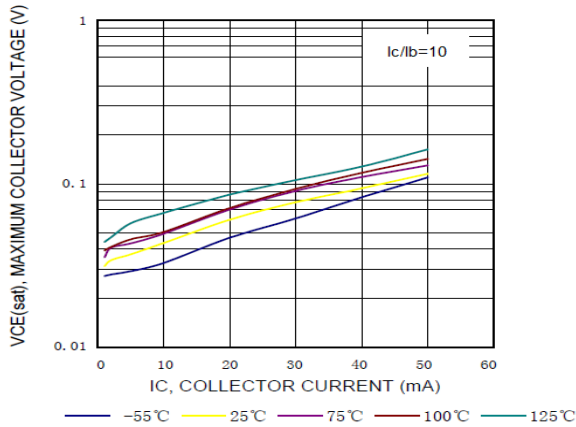


Figure 3. Output Capacitance

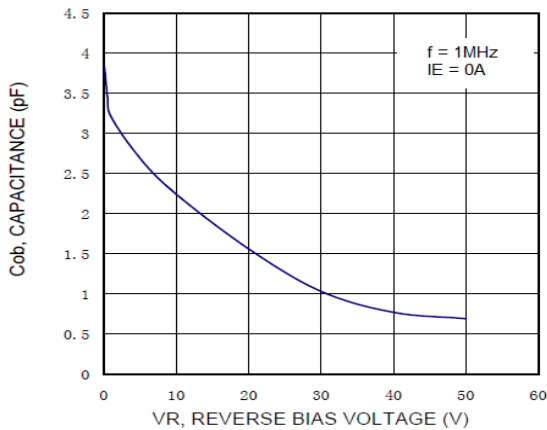


Figure 5. Input Voltage vs. Output Current

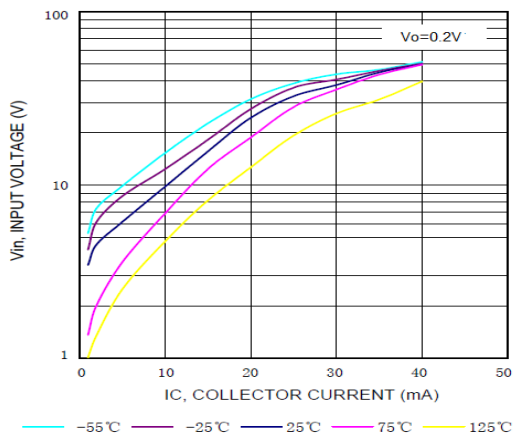


Figure 2. DC Current Gain


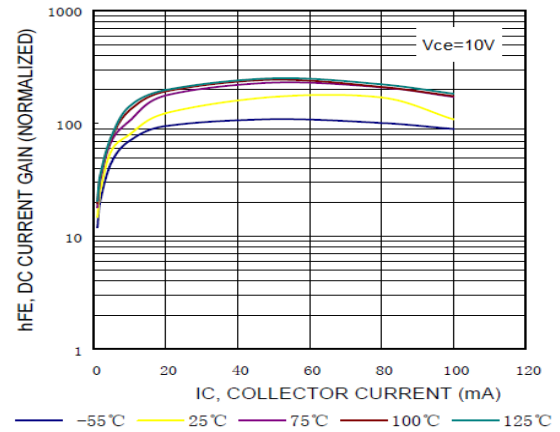


Figure 4. Output Current vs. Input Voltage



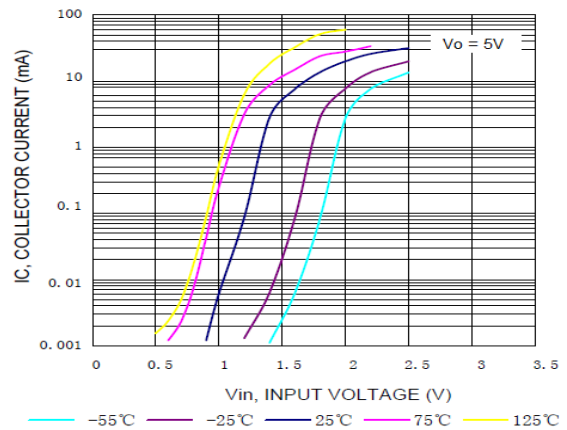

DTC115EE

Figure 6. $V_{CE(sat)}$ vs. I_C

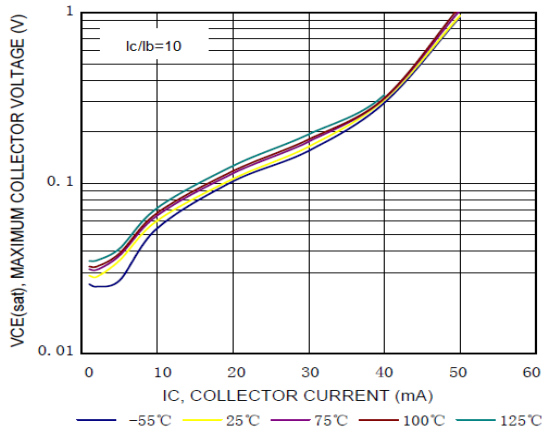


Figure 7. DC Current Gain

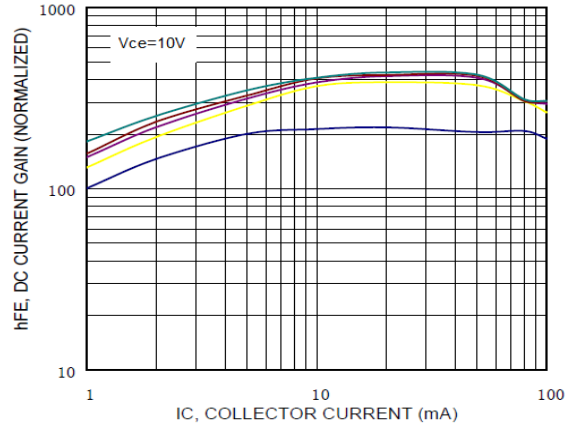


Figure 8. Output Capacitance

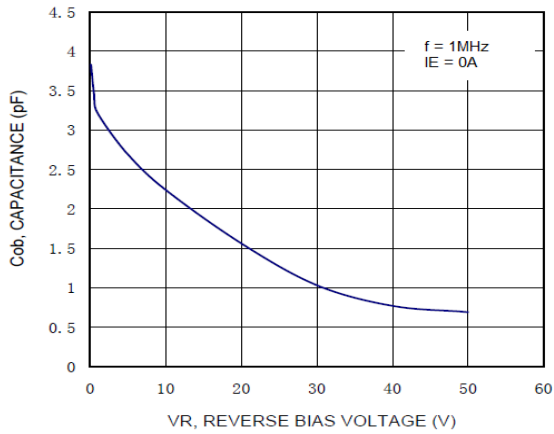


Figure 9. Output Current vs. Input Voltage


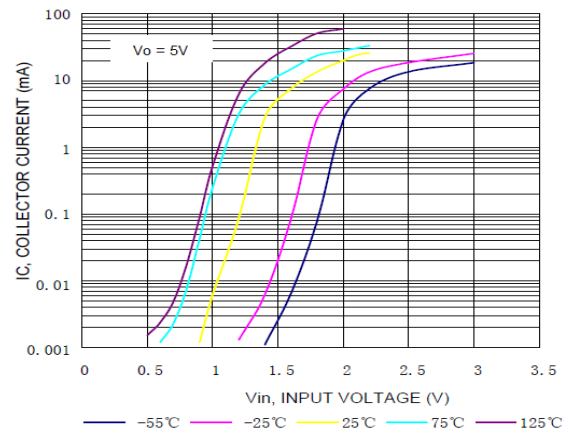


Figure 10. Input Voltage vs. Output Current

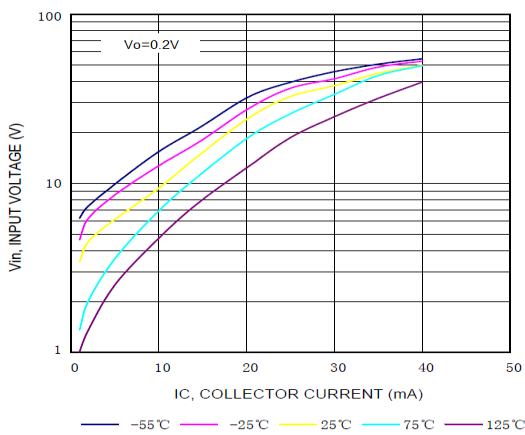

TYPICAL APPLICATIONS FOR NPN BRTs

Figure 11. Level Shifter: Connects 12 To 24 Volt Circuits To Logic

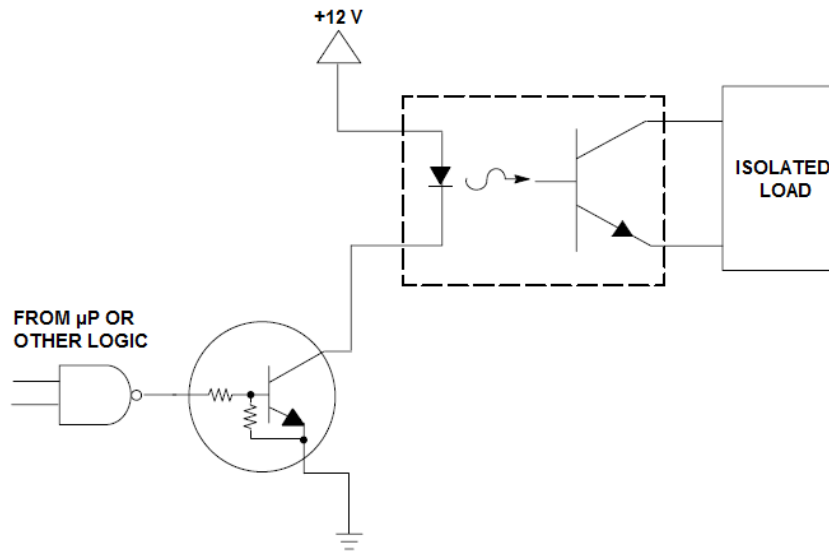


Figure 12. Open Collector Inverter: Inverts The Input Signal


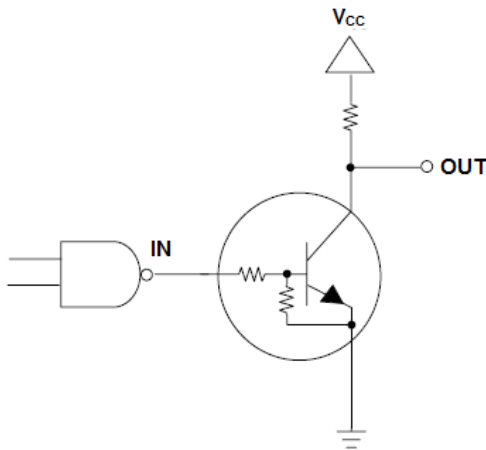



Figure 13. Inexpensive, Unregulated Current Source



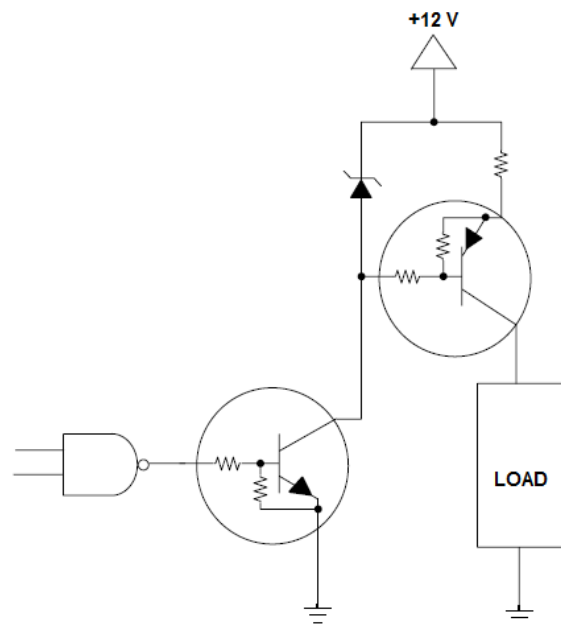

PACKAGE INFORMATION

Dimension in SC-89 Package (Unit: mm)

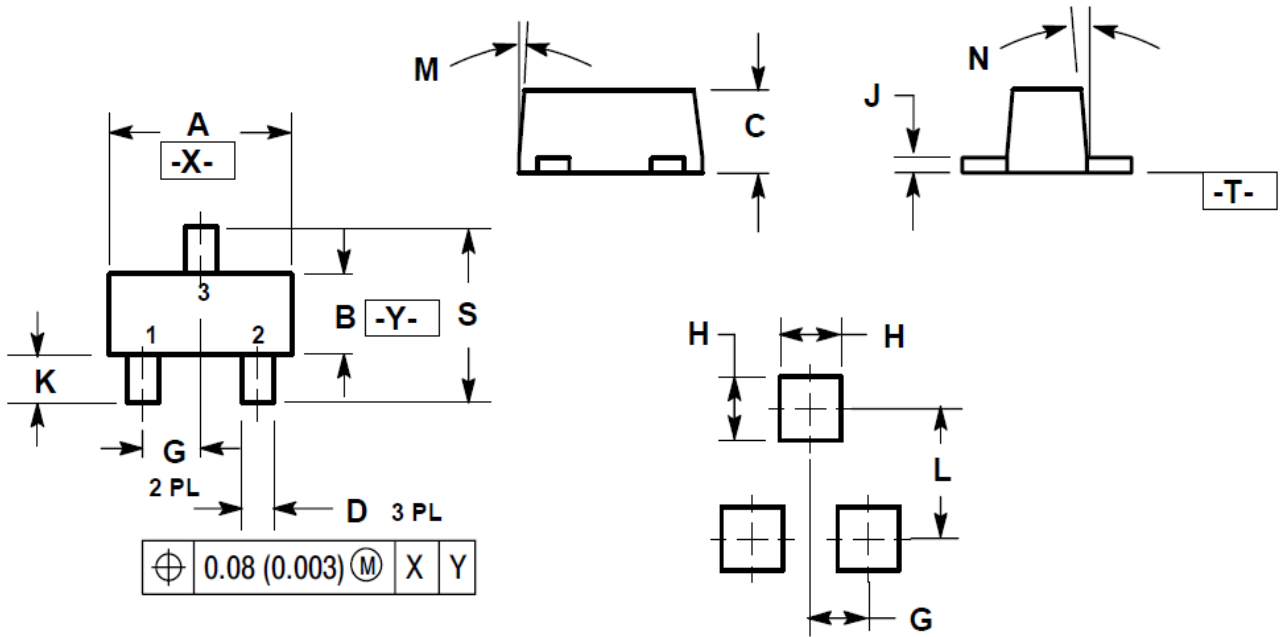

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 1.50 | 1.70 | 0.059 | 0.067 |
| B | 0.75 | 0.95 | 0.030 | 0.040 |
| C | 0.60 | 0.80 | 0.024 | 0.031 |
| D | 0.23 | 0.33 | 0.009 | 0.013 |
| G | 0.50 BSC | | 0.020 BSC | |
| H | 0.53 REF | | 0.021 REF | |
| J | 0.10 | 0.20 | 0.004 | 0.008 |
| K | 0.30 | 0.50 | 0.012 | 0.020 |
| L | 1.10 REF | | 0.043 REF | |
| M | - | 10° | - | 10° |
| N | - | 10° | - | 10° |
| S | 1.50 | 1.70 | 0.059 | 0.067 |



IMPORTANT NOTICE

AiT Components (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Components' integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or severe property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Components assumes no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.