

Digital transistors (built-in resistors)


• Features

- 1) Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors (see equivalent circuit).
- 2) The bias resistors consist of thinfilm resistors with complete isolation to allow positive biasing of the input. They also have the advantage of almost completely eliminating parasitic effects.
- 3) Only the on/ off conditions need to be set for operation, making device design easy.

• Structure


PNP digital transistor (with built-in resistors)

•Equivalent circuit




DTB143EK

DTB143EC

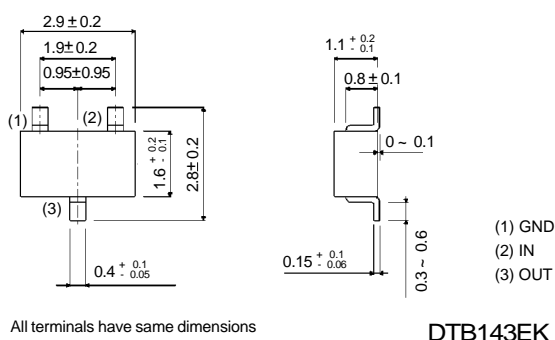

EIAJ: SC—59

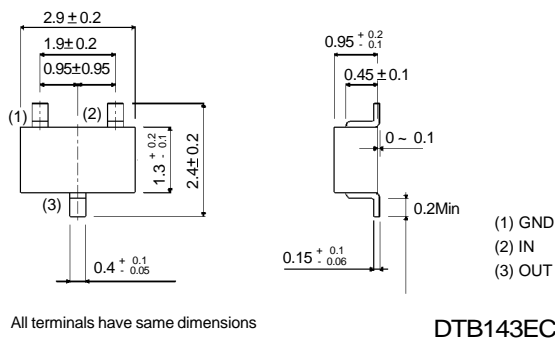

EIAJ: SOT—23

• Absolute maximum ratings(T_a=25 °C)

Parameter	symbol	limits	unit
Supply voltage	V _{cc}	-50	V
Input voltage	V _{IN}	-30~+10	V
Output current	I _C	-500	mA
Power dissipation	P _d	200 300	mW
Junction temperature	T _j	150	°C
Storage temperature	T _{stg}	-55~+150	°C

DTB143EK DTB143EC

● Electrical characteristics($T_a=25^{\circ}\text{C}$)

Parameter	symbol	Min.	Typ.	Max.	Unit	Conditions
Input voltage	$V_{I(off)}$	—	—	-0.5	V	$V_{CC} = -5\text{V}, I_O = -100\mu\text{A}$
	$V_{I(on)}$	-3	—	—		$V_O = -0.3\text{V}, I_O = -20\text{mA}$
Output Voltage	$V_{O(on)}$	—	—	-0.3	V	$I_O / I_I = -50\text{mA} / -2.5\text{mA}$
Input current	I_I	—	—	-1.8	mA	$V_I = -5\text{V}$
Output current	$I_{O(off)}$	—	—	-0.5	μA	$V_{CC} = -50\text{V}, V_I = 0\text{V}$
DC current gain	G_I	47	—	—	—	$V_O = -5\text{V}, I_O = -50\text{mA}$
Input resistance	R_I	3.29	4.7	6.11	$\text{k}\Omega$	—
Resistance ratio	R_2 / R_1	0.8	1	1.2	—	—
Transition frequency	f_T	—	200	—	MHz	$V_{CE} = -10\text{V}, I_E = 5\text{mA}, f = 100\text{MHz}^*$

*Transition frequency of the device

ELECTRICAL CHARACTERISTIC CURVES

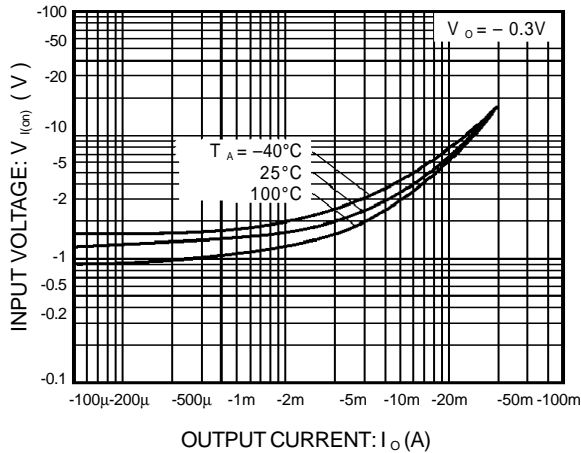


Figure 1. Input voltage vs. output current (ON characteristics)

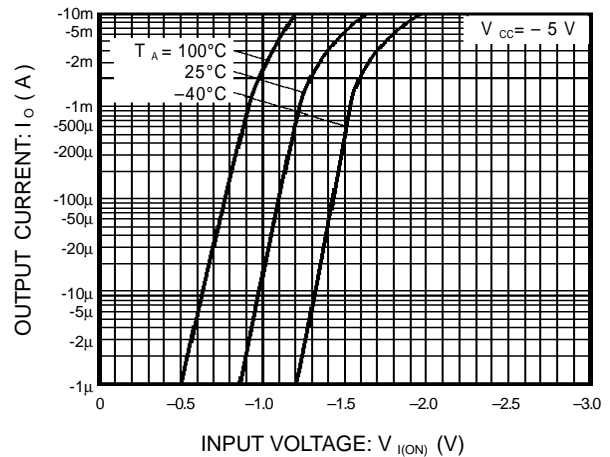


Figure 2. Output current vs. input voltage (OFF characteristics)

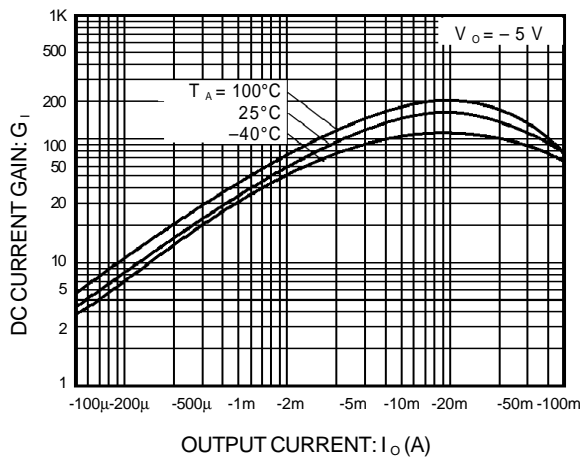


Figure 3. DC current gain vs. output current

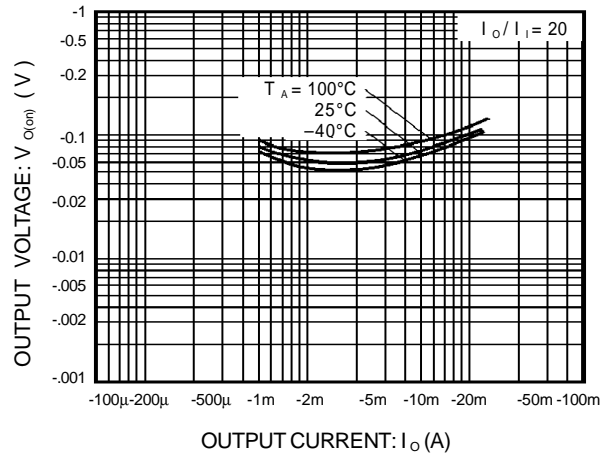


Figure 4. Output voltage vs. output current

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.