


1A Low Dropout Voltage Regulator Fixed Output, Fast Response

FEATURES

- 1% Output Accuracy SPX3940A
- Guaranteed 1.5A Peak Current
- Low Quiescent Current
- Low Dropout Voltage of 280mV at 1A
- Extremely Tight Load and Line Regulation
- Extremely Fast Transient Response
- Reverse-battery Protection
- Internal Thermal Protection
- Internal Short Circuit Current Limit
- Replacement for LM3940
- Standard SOT-223, TO-220 and TO-263 packages

Now Available in Lead Free Packaging



APPLICATIONS

- VGA & Sound Card
- Automotive Electronics
- LCD Monitors
- Cordless Telephones
- Power PC™ Supplies
- SMPS Post-Regulator
- Laptop, Palmtop, and Notebook Computer
- High Efficiency Linear Power Supplies
- Constant Current Regulators
- Portable Instrumentation

DESCRIPTION

The SPX3940 is a 1A, accurate voltage regulators with a low drop out voltage of 280mV (typical) at 1A. These regulators are specifically designed for low voltage applications that require a low dropout voltage and a fast transient response. They are fully fault protected against over-current, reverse battery, and positive and negative voltage transients.

The SPX3940 is offered in 3-pin SOT-223, TO-220 & TO-263 packages. For a 3A version, refer to the SPX29300 data sheet.

TYPICAL APPLICATIONS CIRCUIT

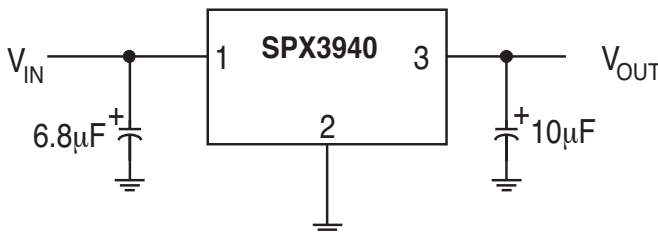


Figure 1. Fixed Output Linear Regulator.

ABSOLUTE MAXIMUM RATINGS

| | |
|---|-----------------|
| Lead Temperature (soldering, 5 seconds) | 260°C |
| Storage Temperature Range | -65°C to +150°C |
| Operating Junction Temperature Range | -40°C to +125°C |
| Input Voltage (Note 5) | 16V |

ELECTRICAL CHARACTERISTICS

At $V_{IN} = V_{OUT} + 1V$ and $I_{OUT} = 10\text{ mA}$, $C_{IN} = 6.8\ \mu\text{F}$, $C_{OUT} = 10\ \mu\text{F}$; $T_A = 25^\circ\text{C}$, unless otherwise specified. The Boldface applies over the junction temperature range. Adjustable versions are set at 5.0V.

| PARAMETER | CONDITIONS | TYP | MIN | MAX | MIN | MAX | UNITS |
|--|--|-------------------|-----------------------|--------------------------|-----------------------|--------------------------|----------------------------|
| | | | SPX3940A (1%) | | SP3940 (2%) | | |
| 1.8V Version | | | | | | | |
| Output Voltage | $I_{OUT} = 10\text{mA}$ $10\text{mA} \leq I_{OUT} \leq 1\text{A}$, $6V \leq V_{IN} \leq 16V$ | 1.8 1.8 | 1.782 1.755 | 1.818 1.845 | 1.764 1.737 | 1.836 1.863 | V |
| 2.5V Version | | | | | | | |
| Output Voltage | $I_{OUT} = 10\text{mA}$ $10\text{mA} \leq I_{OUT} \leq 1\text{A}$, $6V \leq V_{IN} \leq 16V$ | 2.5 2.5 | 2.475 2.437 | 2.525 2.563 | 2.450 2.412 | 2.550 2.588 | V |
| 3.3V Version | | | | | | | |
| Output Voltage | $I_{OUT} = 10\text{mA}$ $10\text{mA} \leq I_{OUT} \leq 1\text{A}$, $6V \leq V_{IN} \leq 16V$ | 3.3 3.3 | 3.267 3.217 | 3.333 3.383 | 3.234 3.184 | 3.366 3.416 | V |
| 5.0V Version | | | | | | | |
| Output Voltage | $I_{OUT} = 10\text{mA}$ $10\text{mA} \leq I_{OUT} \leq 1\text{A}$, $6V \leq V_{IN} \leq 16V$ | 5.0 5.0 | 4.950 4.875 | 5.050 5.125 | 4.900 4.825 | 5.100 5.175 | V |
| All Voltage Options | | | | | | | |
| Line Regulation | $I_O = 10\text{mA}$, $(V_{OUT} + 1V) \leq V_{IN} \leq 16V$ | 0.2 | | 1.0 | | 1.0 | % |
| Load Regulation | $V_{IN} = V_{OUT} + 1V$, $10\text{mA} \leq I_{OUT} \leq 1\text{A}$ | 0.3 | | 1.5 | | 1.5 | % |
| ΔV ΔT | Output Voltage Temperature Coef. | 20 | | 100 | | 100 | ppm/°C |
| Dropout Voltage (Note 1) (except 1.8V version) | $I_O = 100\text{mA}$ $I_O = 1\text{A}$ | 70 280 | | 200 550 | | 200 550 | mV |
| Ground Current (Note 3) | $I_O = 750\text{mA}$, $V_{IN} = V_{OUT} + 1V$ $I_O = 1\text{A}$ | 12 18 | | 25 | | 25 | mA |
| I_{GNDDO} Ground Pin Current at Dropout | $V_{IN} = 0.1V$ less than specified V_{OUT} $I_{OUT} = 10\text{mA}$ | 1.2 | | | | | mA |
| Current Limit | $V_{OUT} = 0V$ (Note 2) | 2.2 | 1.5 | | 1.5 | | A |
| Output Noise Voltage (10Hz to 100kHz) $I_L = 100\text{mA}$ | $C_L = 10\ \mu\text{F}$ $C_L = 33\ \mu\text{F}$ | 400 260 | | | | | μV_{RMS} |
| Thermal Resistance | TO-220 Junction to Case, at Tab TO-220 Junction to Ambient | 3 29.4 | | | | | °C/W |
| | TO-263 Junction to Case, at Tab TO-263 Junction to Ambient | 3 31.4 | | | | | °C/W |
| | SOT-223 Junction to Case, at Tab SOT-223 Junction to Ambient | 15 62.3 | | | | | °C/W |

NOTES:


Note 1: Dropout voltage is defined as the input to output differential when the output voltage drops to 99% of its normal value.

Note 2: $V_{IN} = V_{OUT}(\text{NOMINAL}) + 1V$. For example, use $V_{IN} = 4.3V$ for a 3.3V regulator. Employ pulse-testing procedures to minimize temperature rise.

Note 3: Ground pin current is the regulator quiescent current. The total current drawn from the source is the sum of the load current to the ground current.

Note 4: Thermal regulation is defined as the change in the output voltage at a time T after a change in power dissipation is applied, excluding load or line regulation effects.

Note 5: Maximum positive supply voltage of 20V must be of limited duration (<100ms) and duty cycle (<1%). The maximum continuous supply voltage is 16V.

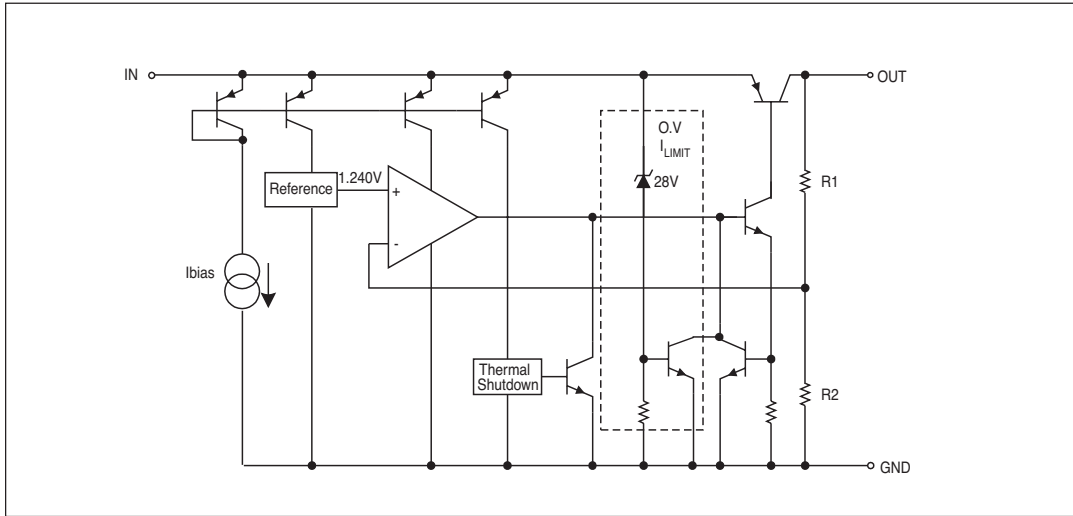

TYPICAL PERFORMANCE CHARACTERISTICS

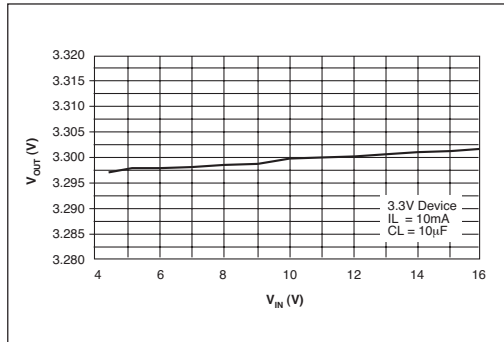


Figure 2. Line Regulation

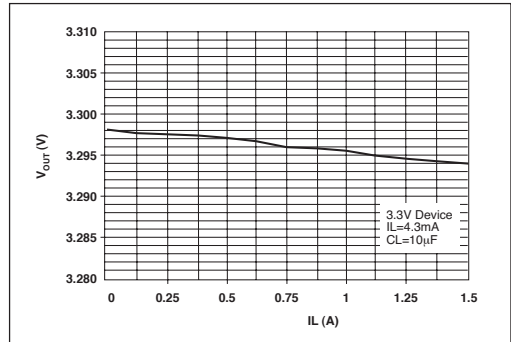


Figure 3. Load Regulation

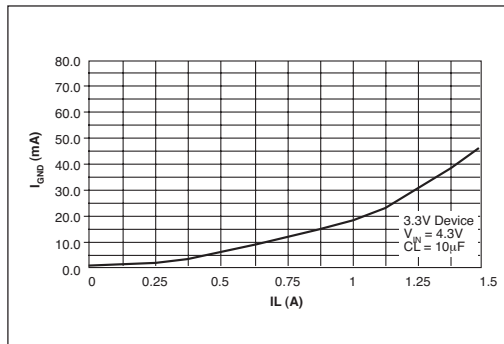


Figure 4. Ground Current vs Load Current

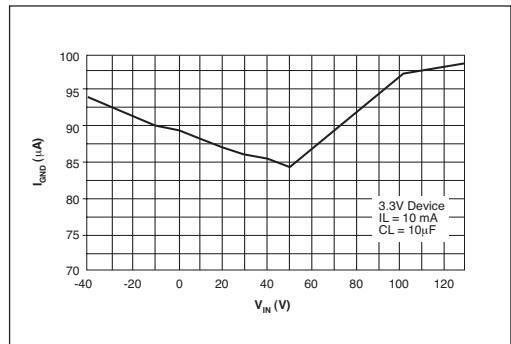


Figure 5. Ground Current vs Input Voltage

TYPICAL PERFORMANCE CHARACTERISTICS

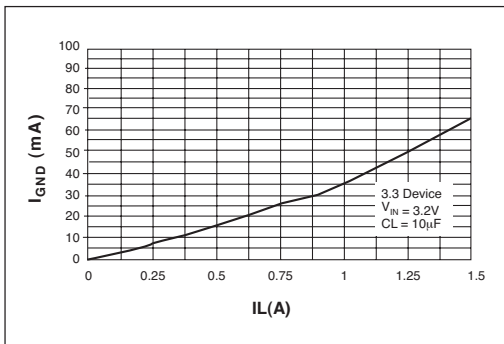


Figure 6. Ground Current vs Load Current in Dropout

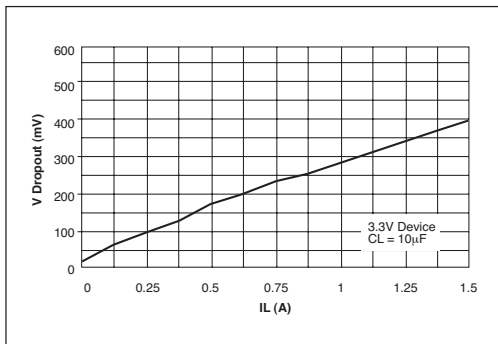


Figure 7. Dropout Voltage vs Load Current

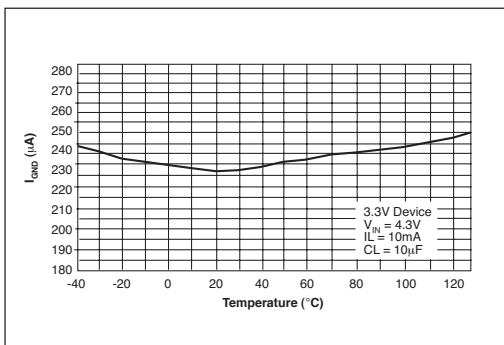


Figure 8. Ground Current vs Temperature at $I_{LOAD} = 10mA$

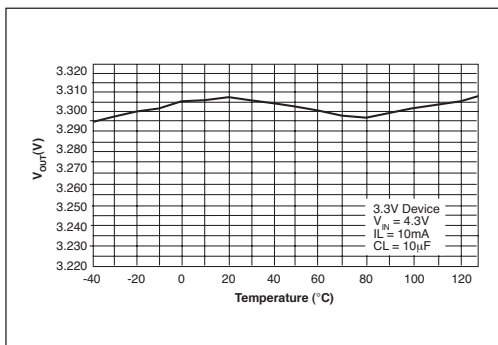


Figure 9. Output Voltage vs Temperature at $I_{LOAD} = 10mA$

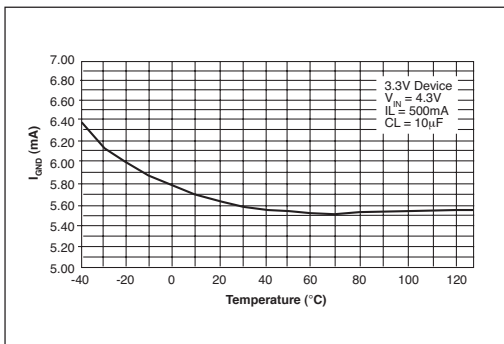


Figure 10. Ground Current vs Temperature at $I_{LOAD} = 500mA$

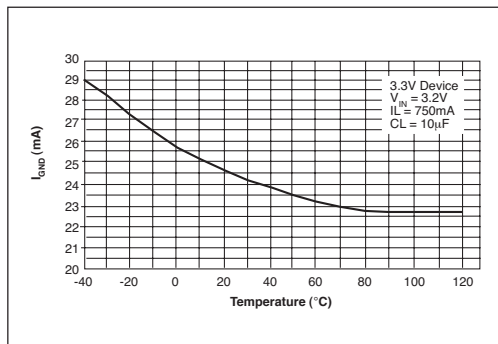


Figure 11. Ground Current vs Temperature in Dropout at $I_{LOAD} = 750mA$

TYPICAL PERFORMANCE CHARACTERISTICS

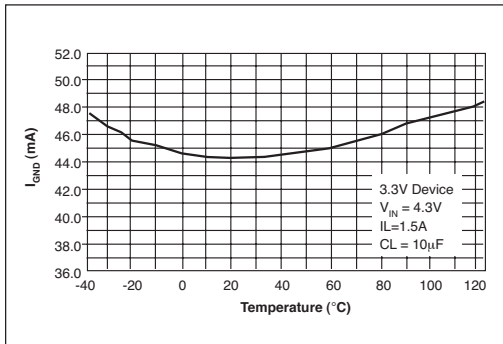


Figure 12. Ground Current vs Temperature at $I_{LOAD} = 1.5A$

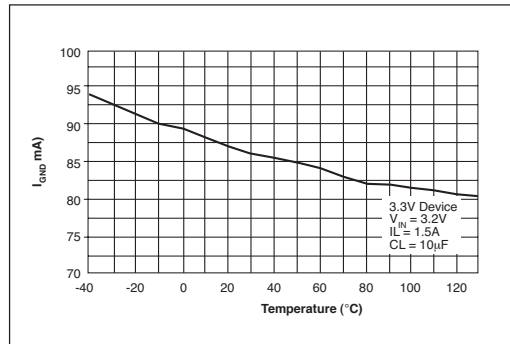


Figure 13. Ground Current vs Temperature in Dropout at $I_{LOAD} = 1.5A$

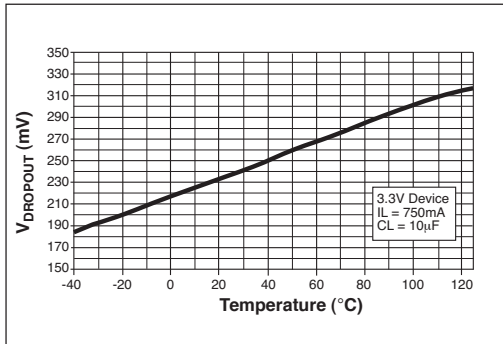


Figure 14. Dropout Voltage vs Temperature at $I_{LOAD} = 750mA$

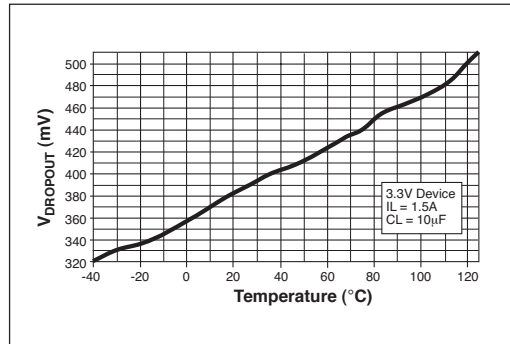


Figure 15. Dropout Voltage vs Temperature at $I_{LOAD} = 1.5mA$

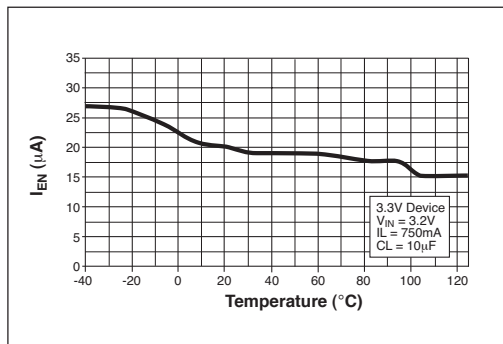


Figure 16. Enable Current vs Temperature for $V_{EN} = 16V$

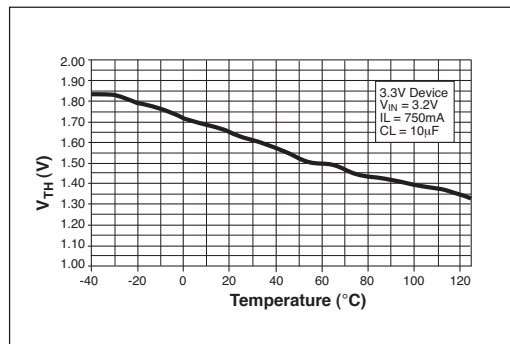


Figure 17. Enable Threshold vs Temperature

The SPX3940 incorporates protection against over-current faults, reversed load insertion, over temperature operation, and positive and negative transient voltage.

Thermal Considerations

Although the SPX3940 offers limiting circuitry for overload conditions, it is still necessary to insure that the maximum junction temperature is not exceeded in the application. Heat will flow through the lowest resistance path, the junction-to-case path. In order to insure the best thermal flow of the component, proper mounting is required. Consult heatsink manufacturer for thermal resistance and design of heatsink.

For example, TO-220 design:

Assume that $V_{IN} = 10V$, $V_{OUT} = 5V$, $I_{OUT} = 1.5A$, $T_A = 50^{\circ}C/W$, $\theta_{HA} = 1^{\circ}C/W$, $\theta_{CH} = 2^{\circ}C/W$, and $\theta_{JC} = 3^{\circ}C/W$.

Where T_A = ambient temperature

θ_{HA} = heatsink to ambient thermal resistance

θ_{CH} = case to heatsink thermal resistance

θ_{JC} = junction to case thermal resistance

The power calculated under these conditions is:

$$P_D = (V_{IN} - V_{OUT}) * I_{OUT} = 7.5W.$$

And the junction temperature is calculated as

$$T_J = T_A + P_D * (\theta_{HA} + \theta_{CH} + \theta_{JC}) \text{ or}$$

$$T_J = 50 + 7.5 * (1 + 2 + 3) = 95^{\circ}C$$

Reliable operation is insured.

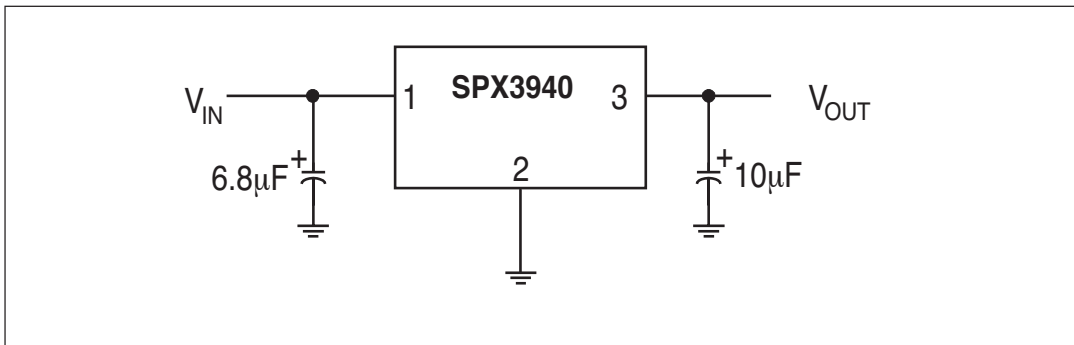


Figure 18. Fixed Output Linear Regulator.





Capacitor Requirements

The output capacitor is needed to insure stability and minimize the output noise. The value of the capacitor varies with the load. However, a minimum value of 10µF aluminum capacitor will guarantee stability over all load conditions. A tantalum capacitor is recommended if a faster load transient response is needed.




If the power source has a high AC impedance, a 0.1µF ceramic capacitor between input & ground is recommended.

Minimum Load Current



To ensure a proper behavior of the regulator under light load, a minimum load of 5mA for SPX3940 is required.

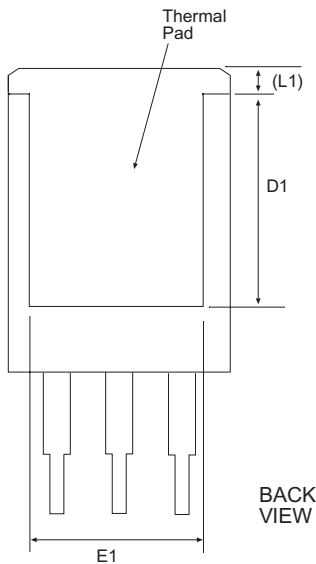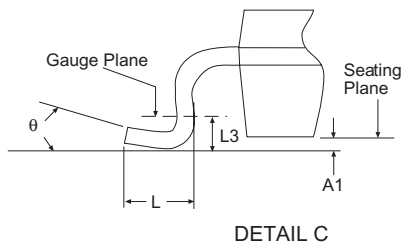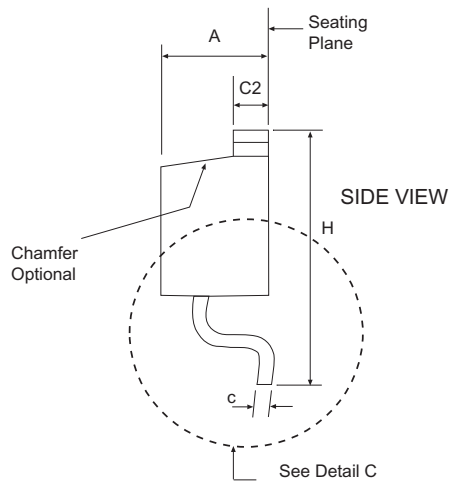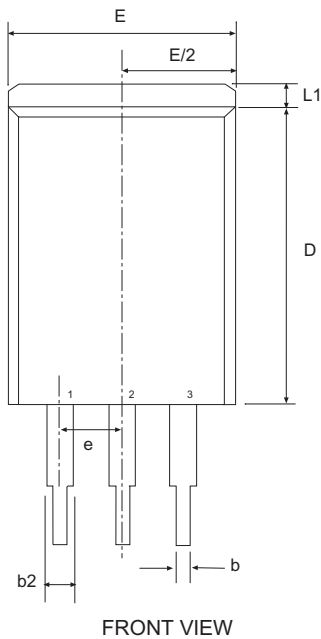

| 3 Pin TO-263 JEDEC TO-263 | | | Variation AA | | | |
|-----------------------------|---------------------------------|-----|--------------|--|-----|-------|
| SYMBOL | Inches Controlling Dimension | | | Millimeters Conversion Factor: 1 Inch = 25.40 mm | | |
| | MIN | NOM | MAX | MIN | NOM | MAX |
| A | 0.160 | - | 0.190 | 4.06 | - | 4.83 |
| A1 | 0.000 | - | 0.010 | 0.00 | - | 0.25 |
| b | 0.020 | - | 0.039 | 0.51 | - | 0.99 |
| b2 | 0.045 | - | 0.070 | 1.14 | - | 1.78 |
| c | 0.015 | - | 0.029 | 0.38 | - | 0.74 |
| c2 | 0.045 | - | 0.065 | 1.14 | - | 1.65 |
| D | 0.330 | - | 0.380 | 8.38 | - | 9.65 |
| D1 | 0.270 | - | - | 6.86 | - | - |
| E | 0.380 | - | 0.420 | 9.65 | - | 10.67 |
| E1 | 0.245 | - | - | 6.22 | - | - |
| e | .100 BSC | | | 2.54 BSC | | |
| H | 0.575 | - | 0.625 | 14.61 | - | 15.88 |
| L | 0.070 | - | 0.110 | 1.78 | - | 2.79 |
| L1 | - | - | 0.066 | - | - | 1.68 |
| L3 | .010 BSC | | | 0.25 BSC | | |
| θ | 0° | - | 8° | 0° | - | 8° |
| SIPEX Pkg Signoff Date/Rev: | | | | JL Aug5-05 / Rev A | | |

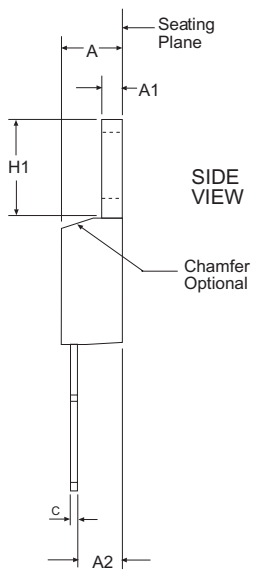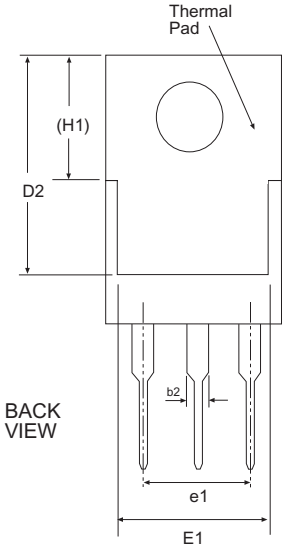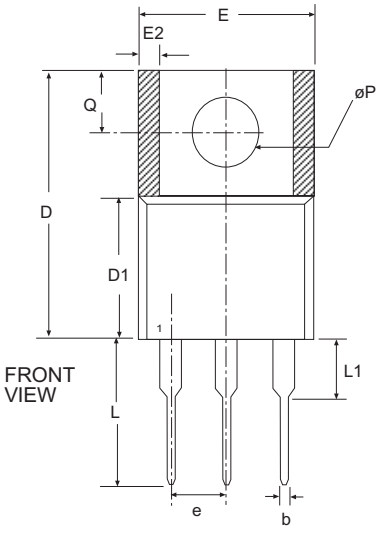


| 3 Pin TO-220 | | JEDEC TO-220 | | | Variation AB | | |
|-----------------------------|--|--------------|-------|---|--------------|-------|--|
| SYMBOL | Dimensions in Inches: Controlling Dimension | | | Dimensions in Millimeters: Conversion Factor: 1 Inch = 25.40 mm | | | |
| | MIN | NOM | MAX | MIN | NOM | MAX | |
| A | 0.140 | - | 0.190 | 3.56 | - | 4.83 | |
| A1 | 0.020 | - | 0.055 | 0.51 | - | 1.27 | |
| A2 | 0.080 | - | 0.115 | 2.03 | - | 2.79 | |
| b | 0.015 | 0.027 | 0.040 | 0.25 | 0.51 | 1.02 | |
| b2 | 0.045 | 0.057 | 0.070 | 1.14 | 1.45 | 1.78 | |
| c | 0.014 | - | 0.024 | 0.25 | - | 0.51 | |
| D | 0.560 | - | 0.650 | 14.22 | - | 16.51 | |
| D1 | 0.330 | - | 0.355 | 8.38 | - | 8.89 | |
| D2 | 0.480 | - | 0.507 | 12.19 | - | 12.70 | |
| E | 0.380 | - | 0.420 | 9.65 | - | 10.67 | |
| E1 | 0.270 | - | 0.350 | 6.86 | - | 8.89 | |
| E2 | - | - | 0.030 | - | - | 0.76 | |
| e | .100 BSC | | | 2.54 BSC | | | |
| e1 | .200 BSC | | | 5.08 BSC | | | |
| H1 | 0.230 | - | 0.270 | 5.84 | - | 6.86 | |
| L | 0.500 | - | 0.580 | 12.70 | - | 14.73 | |
| L1 | - | - | 0.250 | - | - | 6.35 | |
| øP | 0.139 | - | 0.161 | 3.30 | - | 4.06 | |
| Q | 0.100 | - | 0.135 | 2.54 | - | 3.30 | |
| SIPEX Pkg Signoff Date/Rev: | | | | JL Aug4-05 / Rev A | | | |

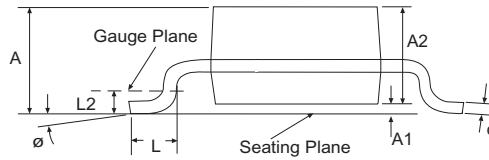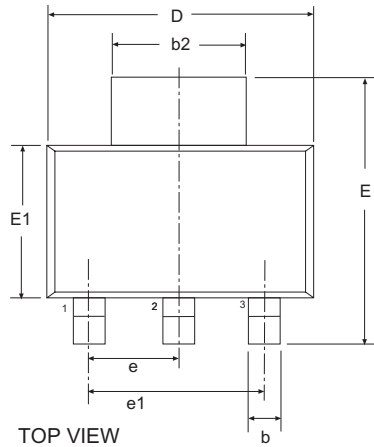


| 3 Pin SOT-223 | | | JEDEC TO-261 | | | Variation AA | | |
|-----------------------------|--------------------------------------|------|--------------|---|-------|--------------|--|--|
| SYMBOL | Millimeters Controlling Dimension | | | Inches Conversion Factor: 1 Inch = 25.40 mm | | | | |
| | MIN | NOM | MAX | MIN | NOM | MAX | | |
| A | - | - | 1.80 | - | - | 0.071 | | |
| A1 | 0.02 | - | 0.10 | 0.001 | - | 0.004 | | |
| A2 | 1.50 | 1.60 | 1.70 | 0.060 | 0.063 | 0.067 | | |
| b | 0.66 | 0.76 | 0.84 | 0.026 | 0.030 | 0.033 | | |
| b2 | 2.90 | 3.00 | 3.10 | 0.114 | 0.118 | 0.122 | | |
| c | 0.23 | 0.30 | 0.35 | 0.010 | 0.012 | 0.014 | | |
| D | 6.30 | 6.50 | 6.70 | 0.248 | 0.256 | 0.264 | | |
| E | 6.70 | 7.00 | 7.30 | 0.264 | 0.276 | 0.287 | | |
| E1 | 3.30 | 3.50 | 3.70 | 0.130 | 0.138 | 0.146 | | |
| e | 2.30 BASIC | | | 0.091 BASIC | | | | |
| e1 | 4.60 BASIC | | | 0.182 BASIC | | | | |
| L | 0.75 | - | - | 0.030 | - | - | | |
| L2 | 0.25 BASIC | | | 0.010 BASIC | | | | |
| ∅ | 0° | - | 10° | 0° | - | 10° | | |
| SIPEX Pkg Signoff Date/Rev: | | | | JL Aug8-05/Rev A | | | | |

TO-263-3 Package (T)




Front View
TAB=GND

TO-220-3 Package (U)



Front View
TAB=GND

SOT-223 (M3)



Top View
TAB=GND

ORDERING INFORMATION

| PART NUMBER | ACC. | OUTPUT VOLTAGE | PACKAGE |
|------------------|------|----------------|---------------|
| SPX3940AU-1-8 | 1% | 1.8V | 3 lead TO-220 |
| SPX3940AU-2-5 | 1% | 2.5V | 3 lead TO-220 |
| SPX3940AU-3-3 | 1% | 3.3V | 3 lead TO-220 |
| SPX3940AU-5-0 | 1% | 5.0V | 3 lead TO-220 |
| SPX3940AT-1-8 | 1% | 1.8V | 3 lead TO-263 |
| SPX3940AT-1-8/TR | 1% | 1.8V | 3 lead TO-263 |
| SPX3940AT-2-5 | 1% | 2.5V | 3 lead TO-263 |
| SPX3940AT-2-5/TR | 1% | 2.5V | 3 lead TO-263 |
| SPX3940AT-3-3 | 1% | 3.3V | 3 lead TO-263 |
| SPX3940AT-3-3/TR | 1% | 3.3V | 3 lead TO-263 |
| SPX3940AT-5-0 | 1% | 5.0V | 3 lead TO-263 |
| SPX3940AT-5-0/TR | 1% | 5.0V | 3 lead TO-263 |
| SPX3940U-1-8 | 2% | 1.8V | 3 lead TO-220 |
| SPX3940U-2-5 | 2% | 2.5V | 3 lead TO-220 |
| SPX3940U-3-3 | 2% | 3.3V | 3 lead TO-220 |
| SPX3940U-5-0 | 2% | 5.0V | 3 lead TO-220 |

Available in lead free packaging. To order add "-L" suffix to part number.

Example: SPX3940AT-3-3/TR = standard; SPX3940AT-L-3-3/TR = lead free

/TR = Tape and Reel

Pack quantity is 500 for TO-263 and 2,500 for SOT-223.



Solved By Sipex™

Sipex Corporation

Headquarters and Sales Office
 233 South Hillview Drive
 Milpitas, CA 95035
 TEL: (408) 934-7500
 FAX: (408) 935-7600

Sipex Corporation reserves the right to make changes to any products described herein. Sipex does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.

| PART NUMBER | ACC. | OUTPUT VOLTAGE | PACKAGE |
|--------------------|-------------|-----------------------|----------------|
| SPX3940T-1-8 | 2% | 1.8V | 3 lead TO-263 |
| SPX3940T-1-8/TR | 2% | 1.8V | 3 lead TO-263 |
| SPX3940T-2-5 | 2% | 2.5V | 3 lead TO-263 |
| SPX3940T-2-5/TR | 2% | 2.5V | 3 lead TO-263 |
| SPX3940T-3-3 | 2% | 3.3V | 3 lead TO-263 |
| SPX3940T-3-3/TR | 2% | 3.3V | 3 lead TO-263 |
| SPX3940T-5-0 | 2% | 5.0V | 3 lead TO-263 |
| SPX3940T-5-0/TR | 2% | 5.0V | 3 lead TO-263 |
| SPX3940AM3-1-8 | 1% | 1.8V | 3 lead SOT-223 |
| SPX3940AM3-1-8/TR | 1% | 1.8V | 3 lead SOT-223 |
| SPX3940AM3-2-5 | 1% | 2.5V | 3 lead SOT-223 |
| SPX3940AM3-2-5/TR | 1% | 2.5V | 3 lead SOT-223 |
| SPX3940AM3-3-3 | 1% | 3.3V | 3 lead SOT-223 |
| SPX3940AM3-3-3/TR | 1% | 3.3V | 3 lead SOT-223 |
| SPX3940AM3-5-0 | 1% | 5.0V | 3 lead SOT-223 |
| SPX3940AM3-5-0/TR | 1% | 5.0V | 3 lead SOT-223 |
| SPX3940M3-1-8 | 2% | 1.8V | 3 lead SOT-223 |
| SPX3940M3-1-8/TR | 2% | 1.8V | 3 lead SOT-223 |
| SPX3940M3-2-5 | 2% | 2.5V | 3 lead SOT-223 |
| SPX3940M3-2-5/TR | 2% | 2.5V | 3 lead SOT-223 |
| SPX3940M3-3-3 | 2% | 3.3V | 3 lead SOT-223 |
| SPX3940M3-3-3/TR | 2% | 3.3V | 3 lead SOT-223 |
| SPX3940M3-5-0 | 2% | 5.0V | 3 lead SOT-223 |
| SPX3940M3-5-0/TR | 2% | 5.0V | 3 lead SOT-223 |

Available in lead free packaging. To order add "-L" suffix to part number.

Example: SPX3940AM3-3-3/TR = standard; SPX3940AM3-L-3-3/TR = lead free

/TR = Tape and Reel

Pack quantity is 500 for TO-263 and 2,500 for SOT-223.



Solved By Sipex™

Sipex Corporation

**Headquarters and
Sales Office**
233 South Hillview Drive
Milpitas, CA 95035
TEL: (408) 934-7500
FAX: (408) 935-7600

Sipex Corporation reserves the right to make changes to any products described herein. Sipex does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.