



# PDV-P9008

## Light Dependent Resistor CdS Photocell

The PDV-P9008 is a Light Dependent Resistor (LDR) with sensitivity in the visible light region. The photoresistor cell is packaged in 2-pin led plastic-coated ceramic header.

Advanced Photonix's CdS Photocells are photoresistor cells for visible light measurement designed to sense light from 400 to 700 nm. Their resistance decreases as the light level increases with efficiency characteristics similar to the human eye. These Light Dependent Resistors (LDR) are available in a wide range of resistance values. They are available in a two-pin led plastic-coated ceramic headers and hermetically sealed TO metal cans.

### Applications

- Industrial
- Audio Compressors
- Night Lights
- Photography Light Meters
- Solar Street Lights
- Flame Detection

### Features

- Visible Light Response
- Sintered Construction
- Passive Resistance output
- Two-pin led ceramic package
- Available in in hermetically sealed package
- Available in a wide range of resistance values

## Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Voltage	$V_R$	-	150	V
Wavelength Range	-	400	700	nm
Power Dissipation	-	-	125	mW
Operating Temperature	$T_{OP}$	-25	+75	°C
Storage Temperature	$T_{STG}$	-25	+75	°C
Package	Ceramic			


## Typical Electro-Optical Specifications at $T_A=23\text{ }^\circ\text{C}$

Parameter	Test Conditions	Symbol	Min	Typ	Max	Unit
Dark Resistance	After 10 sec. @10 Lux @ 2856 °K	$R_D$	20	-	-	MΩ
Illuminated Resistance	10 Lux @ 2856 °K	$R_{IL}$	10	-	200	KΩ
Sensitivity	$\frac{\text{Log}(R100) - \text{Log}(R10)**}{\text{Log}(E100) - \text{Log}(E10)***}$	S	-	0.85	-	Ω/Lux
Spectral Application Range	Flooded	$\lambda$	400	570	700	nm
Rise Time	10 Lux @ 2856 °K	$T_R$	-	60	-	ms
Fall Time	After 10 Lux @ 2856 °K	$T_F$	-	25	-	ms

\*\*R100, R10: cell resistances at 100 Lux and 10 Lux at 2856 K respectively.


\*\*\*E100, E10: luminances at 100 Lux and 10 Lux 2856 K respectively.

## Cell Resistance vs Illuminance

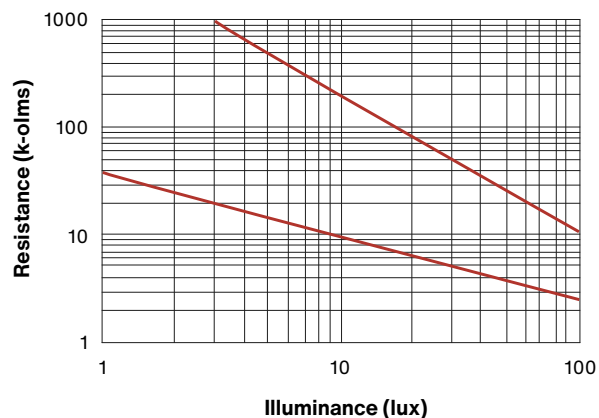

## Mechanical Specifications

Units are in inches [mm]

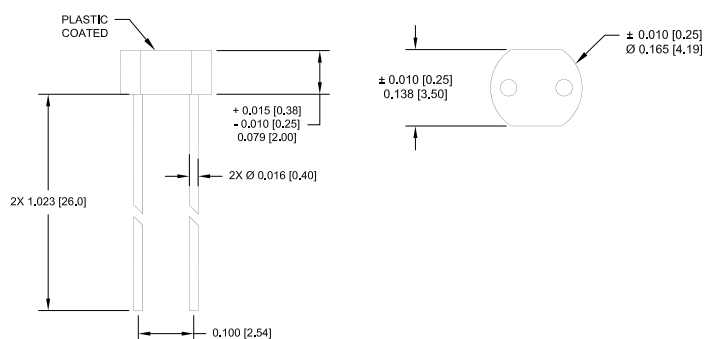

## Care and handling instructions

Your optoelectronic components are packaged and shipped in opaque, padded containers to avoid ambient light exposure and damage due to shock from dropping or jarring.

Care must be taken to avoid exposure to high ambient light levels, particularly from tungsten sources or sunlight.

- These components can be rendered inoperable if dropped or sharply jarred. The wire bonds are delicate and can become separated from the bonding pads when the component is dropped or otherwise receives a sharp physical blow.
- Most windows on photodiodes are either silicon or quartz. They should be cleaned with isopropyl alcohol and a soft (optical grade) pad.
- Photodiode exposure to extreme high or low storage temperatures can affect the subsequent performance. Maintain a non-condensing environment for optimum performance and lifetime.
- All devices are considered ESD sensitive. The photodiodes are shipped in ESD protective packaging. When unpacking and using these products, anti-ESD precautions should be observed.
- Photodiode packages and/or operation may be impaired if exposed to CHLOROETHENE, THINNER, ACETONE, TRICHLOROETHYLENE or any harsh chemicals.
- Optoelectronic components in plastic packages should be given special care. Clear plastic packages are more sensitive to environmental stress than those of black plastic. Storing devices in high humidity can present problems when soldering. Since the rapid heating during soldering stresses the wire bonds and can cause wire to bonding pad separation, it is recommended that devices in plastic packages to be baked for 24 hours at 85°C.
- The leads on the photodiode SHOULD NOT BE FORMED. If your application requires lead spacing modification, please contact Advanced Photonix Applications group at [Techsupport@advancedphotonix.com](mailto:Techsupport@advancedphotonix.com) before forming a product's leads. Product warranties could be voided.
- Most devices are provided with wire or pin leads for installation in circuit boards or sockets. Observe the soldering temperatures and conditions specified below:
  - Soldering Iron: Soldering 30 W or less
  - Temperature at tip of iron 300°C or lower.
  - Dip Soldering: Bath Temperature: 260±5°C.
  - Immersion Time: within 5 Sec.
  - Soldering Time: within 3 Sec.
  - Vapor Phase Soldering, Reflow Soldering: DO NOT USE

## Legal Disclaimer

Information in this data sheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice.

