

National Semiconductor is now part of  
Texas Instruments.

Search <http://www.ti.com/> for the latest technical  
information and details on our current products and services.

# LM2941/LM2941C

## 1A Low Dropout Adjustable Regulator

### General Description

The LM2941 positive voltage regulator features the ability to source 1A of output current with a typical dropout voltage of 0.5V and a maximum of 1V over the entire temperature range. Furthermore, a quiescent current reduction circuit has been included which reduces the ground pin current when the differential between the input voltage and the output voltage exceeds approximately 3V. The quiescent current with 1A of output current and an input-output differential of 5V is therefore only 30mA. Higher quiescent currents only exist when the regulator is in the dropout mode ( $V_{IN} - V_{OUT} \leq 3V$ ).


Designed also for vehicular applications, the LM2941 and all regulated circuitry are protected from reverse battery installations or two-battery jumps. During line transients, such as load dump when the input voltage can momentarily exceed the specified maximum operating voltage, the regulator will automatically shut down to protect both the internal circuits

and the load. Familiar regulator features such as short circuit and thermal overload protection are also provided.


### Features

- LLP space saving package
- Output voltage adjustable from 5V to 20V
- Dropout voltage typically 0.5V @  $I_O = 1A$
- Output current in excess of 1A
- Trimmed reference voltage
- Reverse battery protection
- Internal short circuit current limit
- Mirror image insertion protection
- P+ Product Enhancement tested
- TTL, CMOS compatible ON/OFF switch


### Connection Diagram and Ordering Information

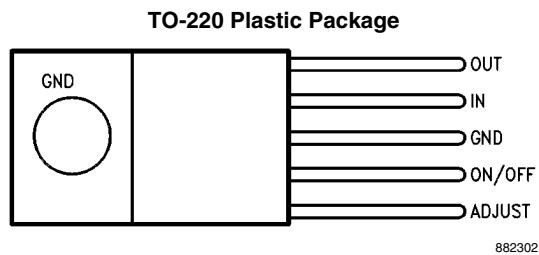

**Top View**  
**Order Number LM2941T or LM2941CT**  
**See NS Package Number TO5A**

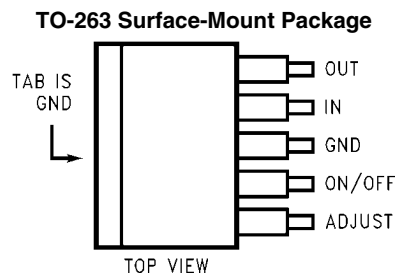

**TOP VIEW**  
**Order Number LM2941S, LM2941SX or LM2941CS,**  
**LM2941CSX**  
**See NS Package Number TS5B**

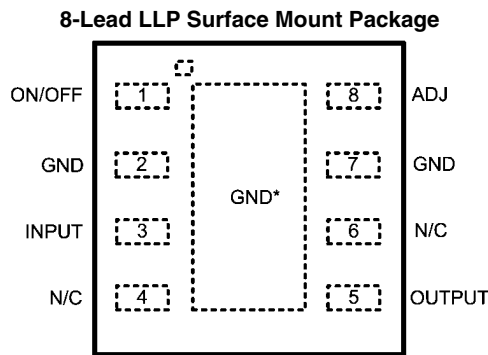

\* TIE TO GND OR LEAVE FLOATING

**Top View**  
**Ordering Number LM2941LD, LM2941LDX**  
**See NS Package Number LDC08A**

LM2941/LM2941C 1A Low Dropout Adjustable Regulator

## Absolute Maximum Ratings *(Note 1)*

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

|  |  |
|--|--|
| Input Voltage (Survival Voltage, $\leq 100\text{ms}$ ) |  |
| LM2941T, LM2941S, LM2941LD                             | 60V  |
| LM2941CT, LM2941CS                                     | 45V  |
| Internal Power Dissipation <i>(Note 4)</i>             | Internally Limited                                   |
| Maximum Junction Temperature                           | 150°C  |
| Storage Temperature Range                              | $-65^\circ\text{C} \leq T_J \leq +150^\circ\text{C}$ |
| Soldering Temperature <i>(Note 9)</i>                  |  |
| TO-220 (T), Wave                                       | 260°C, 10s   |
| TO-263 (S)   | 235°C, 30s   |
| LLP-8 (LD)   | 235°C, 30s   |
| ESD Rating <i>(Note 2)</i>                             | $\pm 2\text{ kV}$                                    |

## Operating Ratings

|                       |   |
|-----------------------|---|
| Maximum Input Voltage | 26V   |
| Temperature Range     |   |
| LM2941T               | $-40^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$ |
| LM2941CT              | $0^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$   |
| LM2941S               | $-40^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$ |
| LM2941CS              | $0^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$   |
| LM2941LD              | $-40^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$ |

## Electrical Characteristics—LM2941T, LM2941S, LM2941LD

$5\text{V} \leq V_O \leq 20\text{V}$ ,  $V_{IN} = V_O + 5\text{V}$ ,  $C_O = 22\mu\text{F}$ , unless otherwise specified. Specifications in standard typeface apply for  $T_J = 25^\circ\text{C}$ , while those in **boldface type** apply over the full **Operating Temperature Range**.

| Parameter                                   | Conditions  | Typ   | LM2941T<br>LM2941S<br>LM2941LD<br>Limit | Units<br>(Limits)   |
|---|---|-------|---|---------------------|
| Reference Voltage                           | $5\text{mA} \leq I_O \leq 1\text{A}$ <i>(Note 7)</i>                    | 1.275 | 1.237/1.211<br>1.313/1.339              | V(min)<br>V(max)    |
| Line Regulation                             | $V_O + 2\text{V} \leq V_{IN} \leq 26\text{V}$ , $I_O = 5\text{mA}$      | 4     | 10/10                                   | mV/V(max)           |
| Load Regulation                             | $50\text{mA} \leq I_O \leq 1\text{A}$                                   | 7     | 10/10                                   | mV/V(max)           |
| Output Impedance                            | 100 mADC and 20 mArms<br>$f_O = 120\text{Hz}$                           | 7     |   | m $\Omega$ /V       |
| Quiescent Current                           | $V_O + 2\text{V} \leq V_{IN} < 26\text{V}$ , $I_O = 5\text{mA}$         | 10    | 15/20                                   | mA(max)             |
|   | $V_{IN} = V_O + 5\text{V}$ , $I_O = 1\text{A}$                          | 30    | 45/60                                   | mA(max)             |
| RMS Output Noise,<br>% of $V_{OUT}$         | 10Hz–100kHz<br>$I_O = 5\text{mA}$                                       | 0.003 |   | %                   |
| Ripple Rejection                            | $f_O = 120\text{Hz}$ , 1 Vrms, $I_L = 100\text{mA}$                     | 0.005 | 0.02/0.04                               | %/V(max)            |
| Long Term Stability                         |   | 0.4   |   | %/1000 Hr           |
| Dropout Voltage                             | $I_O = 1\text{A}$   | 0.5   | 0.8/1.0                                 | V(max)              |
|   | $I_O = 100\text{mA}$  | 110   | 200/200                                 | mV(max)             |
| Short Circuit Current                       | $V_{IN}$ Max = 26V <i>(Note 8)</i>                                      | 1.9   | 1.6                                     | A(min)              |
| Maximum Line<br>Transient                   | $V_O$ Max 1V Above Nominal $V_O$<br>$R_O = 100$ , $t \leq 100\text{ms}$ | 75    | 60/60                                   | V(min)              |
| Maximum Operational<br>Input Voltage        |   | 31    | 26/26                                   | $V_{DC}$            |
| Reverse Polarity<br>DC Input Voltage        | $R_O = 100$ , $V_O \geq -0.6\text{V}$                                   | -30   | -15/-15                                 | V(min)              |
| Reverse Polarity<br>Transient Input Voltage | $t \leq 100\text{ms}$ , $R_O = 100\Omega$                               | -75   | -50/-50                                 | V(min)              |
| ON/OFF Threshold<br>Voltage ON              | $I_O \leq 1\text{A}$  | 1.30  | 0.80/0.80                               | V(max)              |
| ON/OFF Threshold<br>Voltage OFF             | $I_O \leq 1\text{A}$  | 1.30  | 2.00/2.00                               | V(min)              |
| ON/OFF Threshold<br>Current                 | $V_{ON/OFF} = 2.0\text{V}$ , $I_O \leq 1\text{A}$                       | 50    | 100/300                                 | $\mu\text{A}$ (max) |

## Electrical Characteristics—LM2941CT, LM2941CS

$5V \leq V_O \leq 20V$ ,  $V_{IN} = V_O + 5V$ ,  $C_O = 22\mu F$ , unless otherwise specified. Specifications in standard typeface apply for  $T_J = 25^\circ C$ , while those in **boldface type** apply over the full **Operating Temperature Range**.

| Parameter                                   | Conditions   | Typ   | Limit<br>(Note 6)   | Units<br>(Limits) |
|---|--|-------|---------------------|-------------------|
| Reference Voltage                           | $5mA \leq I_O \leq 1A$ (Note 7)  | 1.275 | 1.237/ <b>1.211</b> | V(min)            |
|   |  |       | 1.313/ <b>1.339</b> | V(max)            |
| Line Regulation                             | $V_O + 2V \leq V_{IN} \leq 26V$ , $I_O = 5mA$                          | 4     | 10                  | mV/V(max)         |
| Load Regulation                             | $50mA \leq I_O \leq 1A$  | 7     | 10                  | mV/V(max)         |
| Output Impedance                            | 100 mADC and 20 mArms<br>$f_O = 120Hz$                                 | 7     |                     | m $\Omega$ /V     |
| Quiescent Current                           | $V_O + 2V \leq V_{IN} < 26V$ , $I_O = 5mA$                             | 10    | 15                  | mA(max)           |
|   | $V_{IN} = V_O + 5V$ , $I_O = 1A$                                       | 30    | <b>45/60</b>        | mA(max)           |
| RMS Output Noise,<br>% of $V_{OUT}$         | 10Hz–100kHz<br>$I_O = 5mA$   | 0.003 |                     | %                 |
| Ripple Rejection                            | $f_O = 120Hz$ , 1 Vrms, $I_L = 100mA$                                  | 0.005 | 0.02                | %/V(max)          |
| Long Term Stability                         |  | 0.4   |                     | %/1000 Hr         |
| Dropout Voltage                             | $I_O = 1A$   | 0.5   | <b>0.8/1.0</b>      | V(max)            |
|   | $I_O = 100mA$  | 110   | <b>200/200</b>      | mV(max)           |
| Short Circuit Current                       | $V_{IN}$ Max = 26V (Note 8)  | 1.9   | 1.6                 | A(min)            |
| Maximum Line<br>Transient                   | $V_O$ Max 1V Above Nominal $V_O$<br>$R_O = 100\Omega$ , $T \leq 100ms$ | 55    | 45                  | V(min)            |
| Maximum Operational<br>Input Voltage        |  | 31    | 26                  | $V_{DC}$          |
| Reverse Polarity<br>DC Input Voltage        | $R_O = 100\Omega$ , $V_O \geq -0.6V$                                   | -30   | -15                 | V(min)            |
| Reverse Polarity<br>Transient Input Voltage | $T \leq 100ms$ , $R_O = 100\Omega$                                     | -55   | -45                 | V(min)            |
| ON/OFF Threshold<br>Voltage ON              | $I_O \leq 1A$  | 1.30  | 0.80                | V(max)            |
| ON/OFF Threshold<br>Voltage OFF             | $I_O \leq 1A$  | 1.30  | 2.00                | V(min)            |
| ON/OFF Threshold<br>Current                 | $V_{ON/OFF} = 2.0V$ , $I_O \leq 1A$                                    | 50    | 100                 | $\mu A$ (max)     |

## Thermal Performance

|  |               |     |  |              |
|--|---------------|-----|--|--------------|
| Thermal Resistance<br>Junction-to-Case, $\theta_{JC}$                | 5-Lead TO-220 | 3   |  | $^\circ C/W$ |
|  | 5-Lead TO-263 | 3   |  | $^\circ C/W$ |
|  | 8-Lead LLP    | 5.3 |  | $^\circ C/W$ |
| Thermal Resistance<br>Junction-to-Ambient, $\theta_{JA}$<br>(Note 4) | 5-Lead TO-220 | 53  |  | $^\circ C/W$ |
|  | 5-Lead TO-263 | 73  |  | $^\circ C/W$ |
|  | 8-Lead LLP    | 35  |  | $^\circ C/W$ |

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating ratings indicate conditions for which the device is intended to be functional, but device parameter specifications may not be guaranteed under these conditions. For guaranteed specifications and test conditions, see the Electrical Characteristics.

**Note 2:** The Human Body Model (HBM) is a 100 pF capacitor discharged through a 1.5k $\Omega$  resistor into each pin. Test method is per JESD22–A114.

**Note 3:** A military RETS specification available upon request. For more information about military-aerospace products, see the Mil-Aero web page at <http://www.national.com/appinfo/milaero/index.html>.

**Note 4:** The maximum power dissipation is a function of  $T_J$ (max),  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any ambient temperature is  $P_D = (T_J(\text{max}) - T_A)/\theta_{JA}$ . If this dissipation is exceeded, the die temperature will rise above 150 $^\circ C$  and the LM2941 will go into thermal shutdown. If the TO-263 package is used, the thermal resistance can be reduced by increasing the P.C. board copper area thermally connected to the package: Using 0.5 square inches of copper area,  $\theta_{JA}$  is 50 $^\circ C/W$ ; with 1 square inch of copper area,  $\theta_{JA}$  is 37 $^\circ C/W$ ; and with 1.6 or more square inches of copper area,  $\theta_{JA}$  is 32 $^\circ C/W$ . Thermal performance for the LLP package was obtained using a JESD51-7 board with six vias, using no airflow and an ambient temperature of 22 $^\circ C$ . The value  $\theta_{JA}$  for the LLP package

is specifically dependent on PCB trace area, trace material, and the number of layers and thermal vias. For improved thermal resistance and power dissipation for the LLP package, refer to Application Note AN-1187. It is recommended that 6 vias be placed under the center pad to improve thermal performance.

**Note 5:** All limits guaranteed at room temperature (standard typeface) and at temperature extremes (boldface type). All limits are used to calculate Outgoing Quality Level, and are 100% production tested.





**Note 6:** All limits guaranteed at room temperature (standard typeface) and at temperature extremes (boldface type). All room temperature limits are 100% production tested. All limits at temperature extremes are guaranteed via correlation using standard Statistical Quality Control (SQC) methods.


**Note 7:** The output voltage range is 5V to 20V and is determined by the two external resistors, R1 and R2. See Typical Application Circuit.

**Note 8:** Output current capability will decrease with increasing temperature, but will not go below 1A at the maximum specified temperatures.


**Note 9:** Refer to JEDEC J-STD-020C for surface mount device (SMD) package reflow profiles and conditions. Unless otherwise stated, the temperature and time are for Sn-Pb (STD) only.

## Typical Performance Characteristics

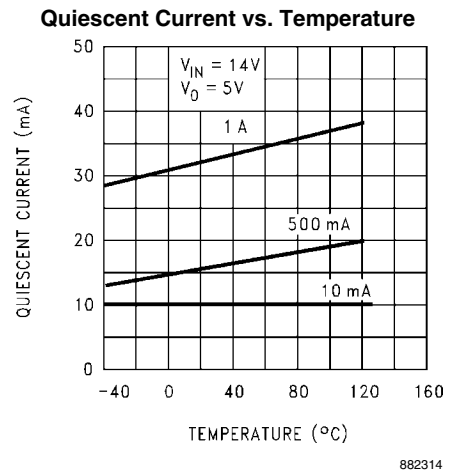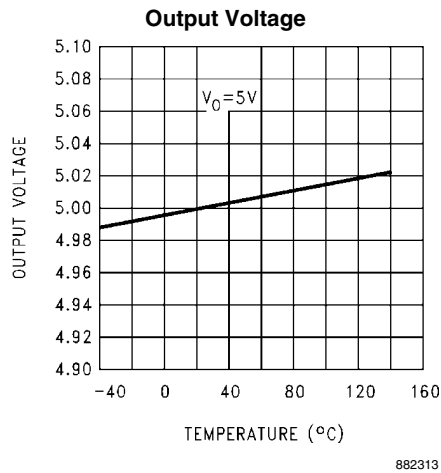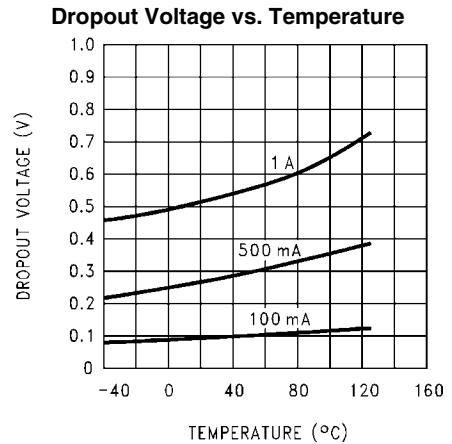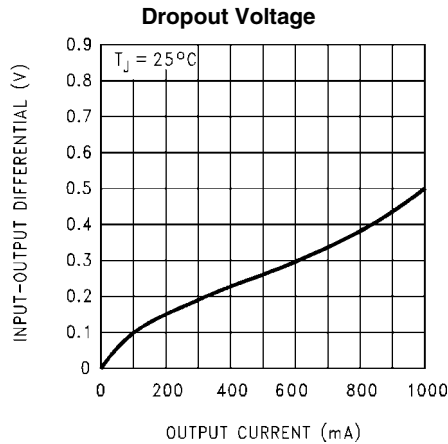


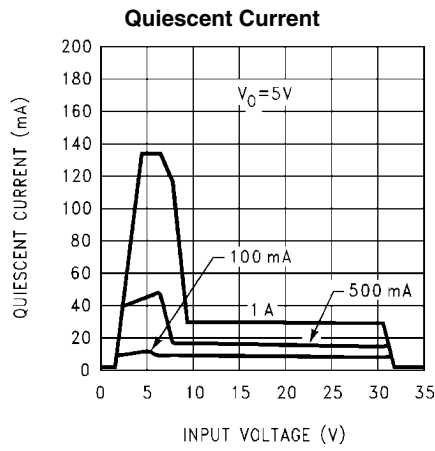


882315

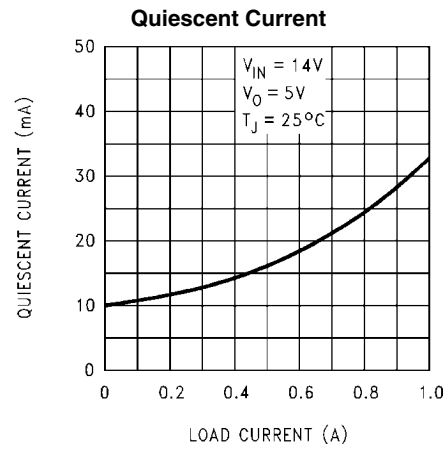


882316

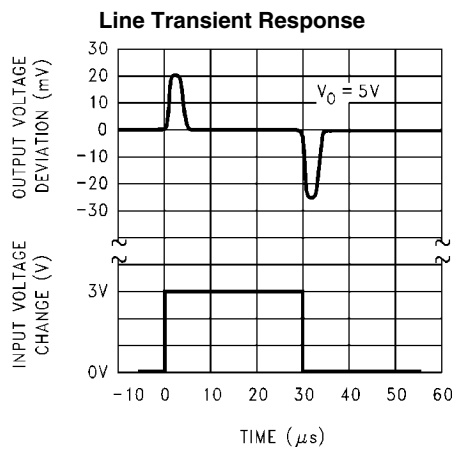


882317

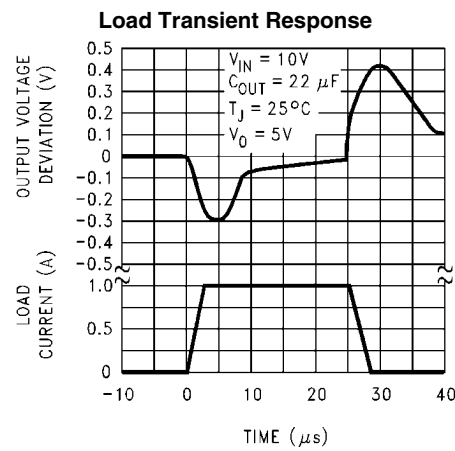

882318

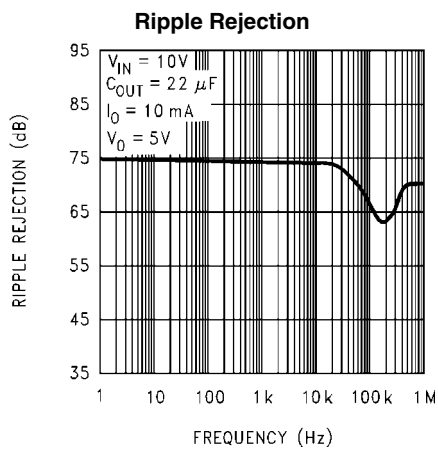


882319

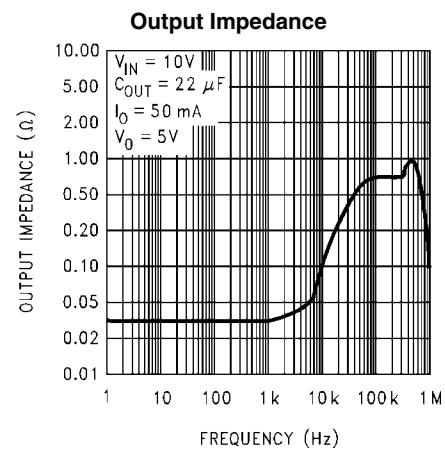


882320

Low Voltage Behavior

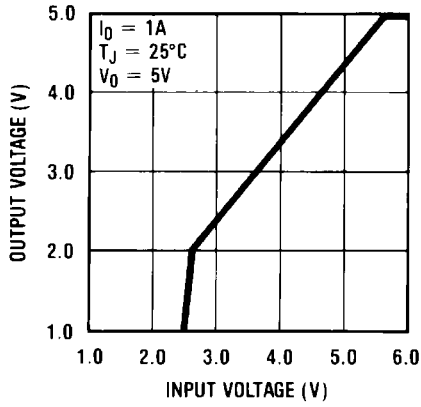


882321

Low Voltage Behavior

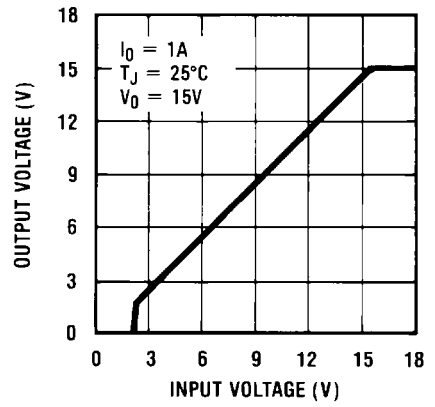


882322

Output Capacitor ESR

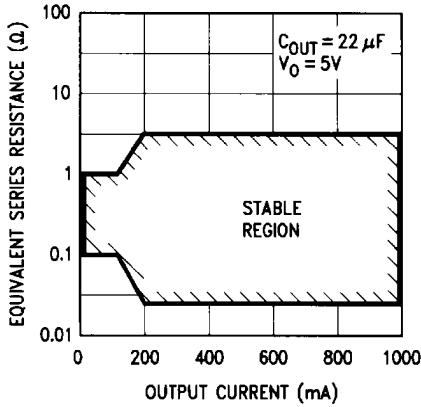


882323

Output at Voltage Extremes

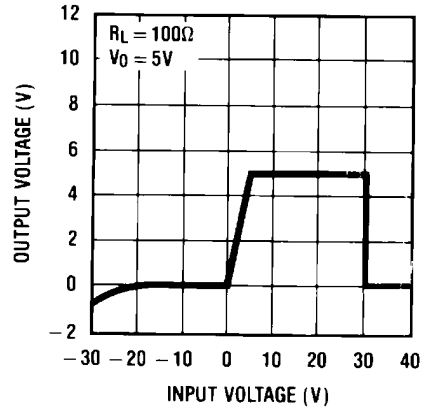


882324

Output at Voltage Extremes

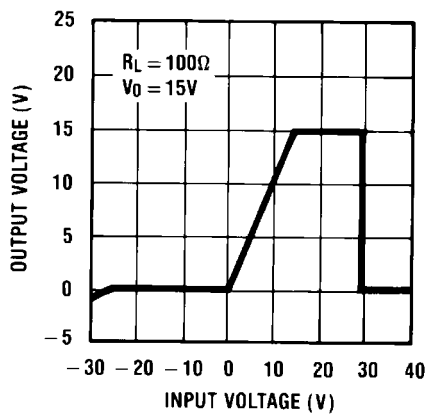


882325

Peak Output Current

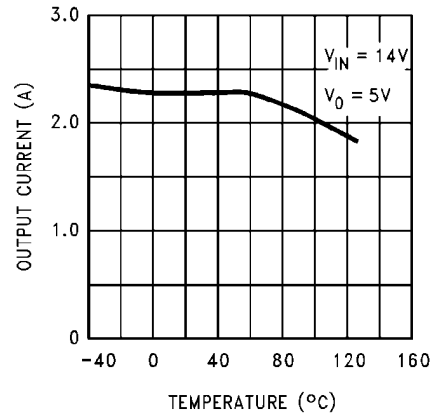


882326

Maximum Power Dissipation (TO-220)

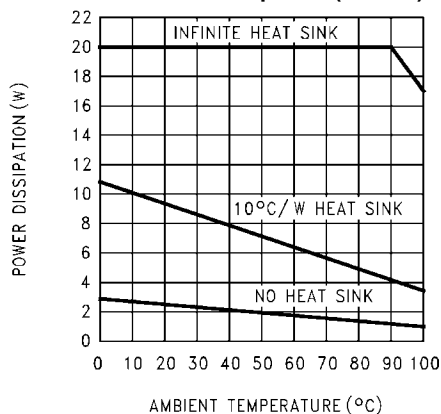


882327

Maximum Power Dissipation (TO-3)

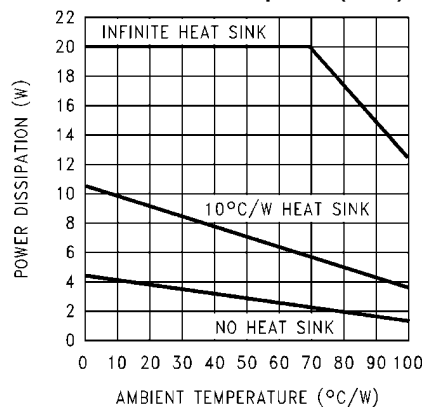

882328

Maximum Power Dissipation (TO-263) (Note 4)

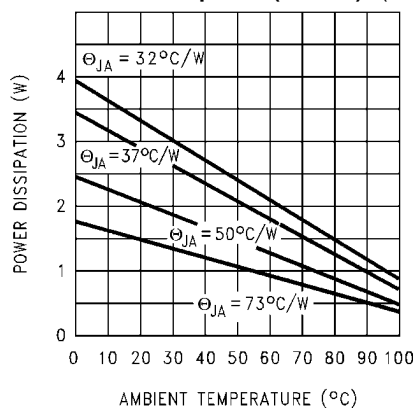

882329

## Definition of Terms

**Dropout Voltage:** The input-voltage differential at which the circuit ceases to regulate against further reduction in input voltage. Measured when the output voltage has dropped 100mV from the nominal value obtained at ( $V_{OUT} + 5V$ ) input, dropout voltage is dependent upon load current and junction temperature.

**Input Voltage:** The DC voltage applied to the input terminals with respect to ground.

**Input-Output Differential:** The voltage difference between the unregulated input voltage and the regulated output voltage for which the regulator will operate.

**Line Regulation:** The change in output voltage for a change in the input voltage. The measurement is made under conditions of low dissipation or by using pulse techniques such that the average chip temperature is not significantly affected.

**Load Regulation:** The change in output voltage for a change in load current at constant chip temperature.

**Long Term Stability:** Output voltage stability under accelerated life-test conditions after 1000 hours with maximum rated voltage and junction temperature.

**Output Noise Voltage:** The rms AC voltage at the output, with constant load and no input ripple, measured over a specified frequency range.

**Quiescent Current:** That part of the positive input current that does not contribute to the positive load current. The regulator ground current.

**Ripple Rejection:** The ratio of the peak-to-peak input ripple voltage to the peak-to-peak output ripple voltage.

**Temperature Stability of  $V_O$ :** The percentage change in output voltage for a thermal variation from room temperature to either temperature extreme.



## Application Hints

### LLP MOUNTING


The LDC08A (Pullback) 8-Lead LLP package requires specific mounting techniques which are detailed in National Semiconductor Application Note # 1187. Referring to the section **PCB Design Recommendations** in AN-1187 (Page 5), it should be noted that the pad style which should be used with the LLP package is the NSMD (non-solder mask defined) type.

The DAP (exposed pad) on the bottom of the LLP package is internally connected to device ground at pin 2 and pin 7. The DAP can be connected directly to ground, or the DAP may be left floating (i.e. no direct electrical connection). The DAP must not be connected to any potential other than ground.

For the LM2941LD in the LDC08A 8-Lead LLP package, the junction-to-case thermal rating,  $\theta_{JC}$ , is  $5.3^{\circ}$  C/W, where the case is the bottom of the package at the center of the DAP.

## Typical Applications

### 5V to 20V Adjustable Regulator

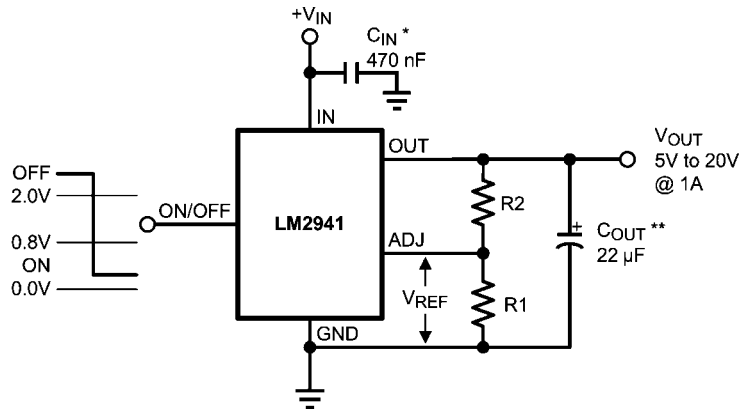

882303

$$V_{OUT} = \text{Reference voltage} \times \frac{R1 + R2}{R1} \text{ where } V_{REF} = 1.275 \text{ typical}$$


$$\text{Solving for } R2: R2 = R1 \left( \frac{V_O}{V_{REF}} - 1 \right)$$

**Note:** Using 1k for R1 will ensure that the input bias current error of the adjust pin will be negligible. Do not bypass R1 or R2. This will lead to instabilities.

\* Required if regulator is located far from power supply filter.

\*\*  $C_{OUT}$  must be at least 22 $\mu$ F to maintain stability. May be increased without bound to maintain regulation during transients. Locate as close as possible to the regulator. This capacitor must be rated over the same operating temperature range as the regulator and the ESR is critical; see curve.


### 1A Switch

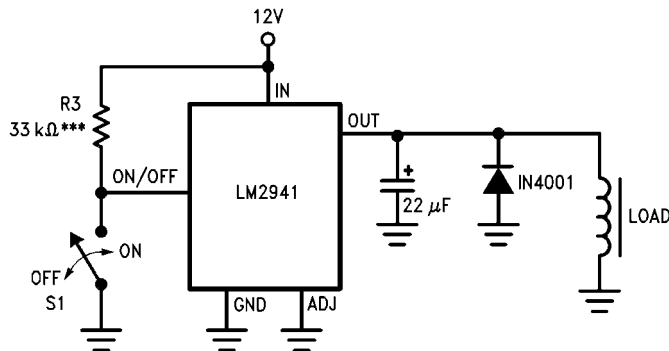

882306



\*\*\* To assure shutdown, select Resistor R3 to guarantee at least 300 $\mu$ A of pull-up current when S1 is open. (Assume 2V at the ON/OFF pin.)

# Equivalent Schematic Diagram

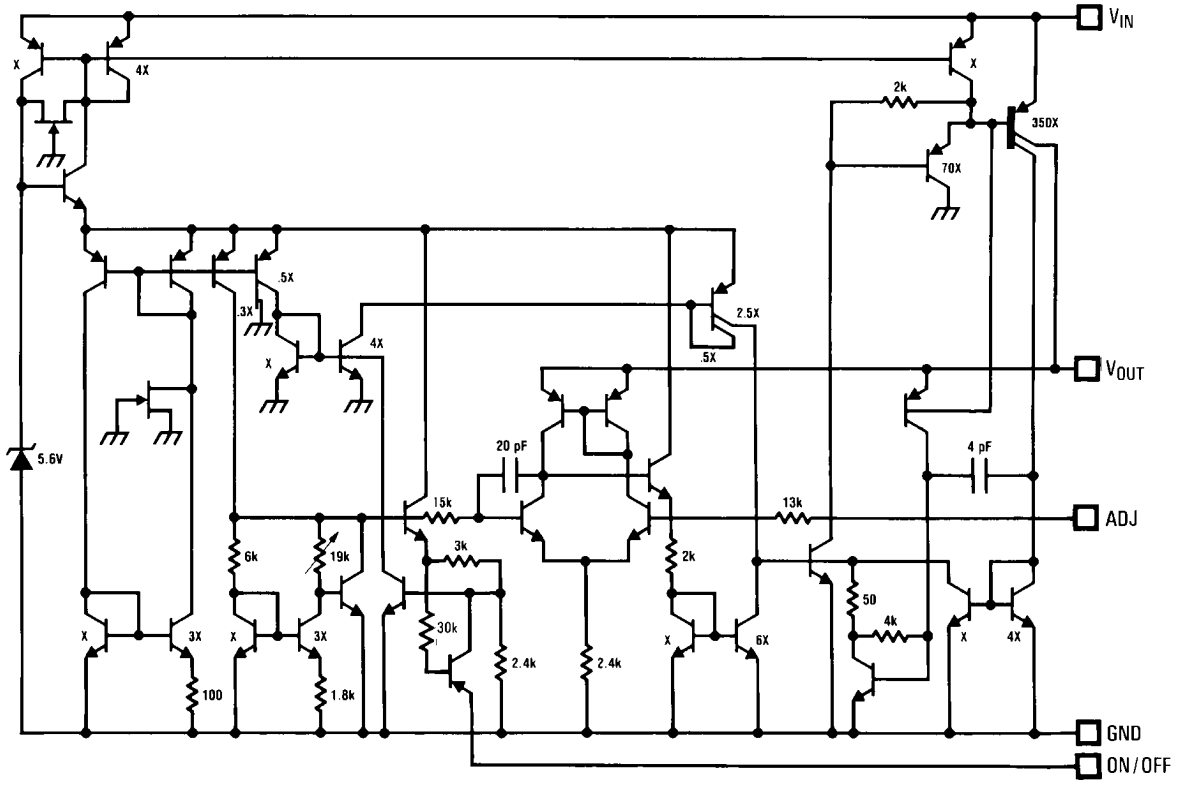



882301

**Physical Dimensions** inches (millimeters) unless otherwise noted

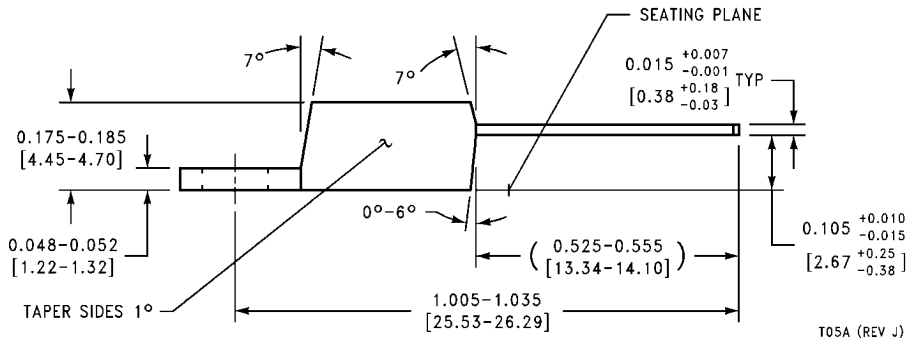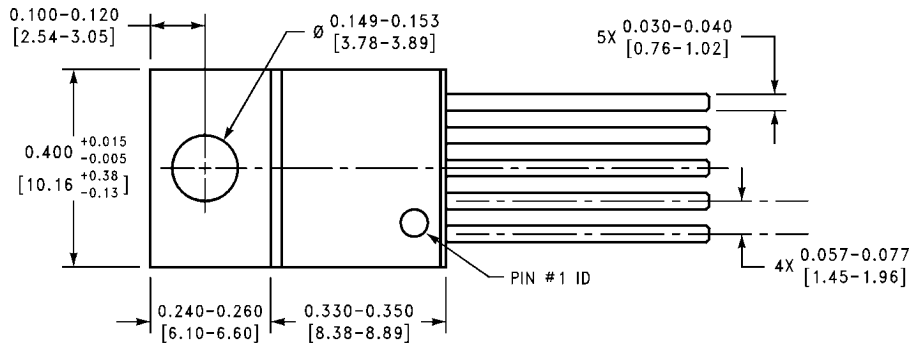


**Order Number LM2941T or LM2941CT  
NS Package Number T05A**

T05A (REV J)

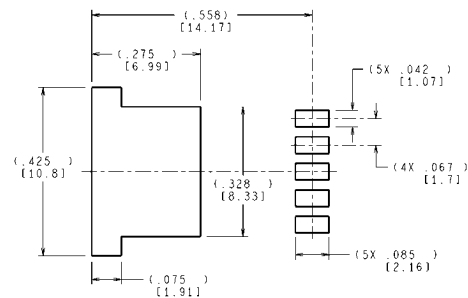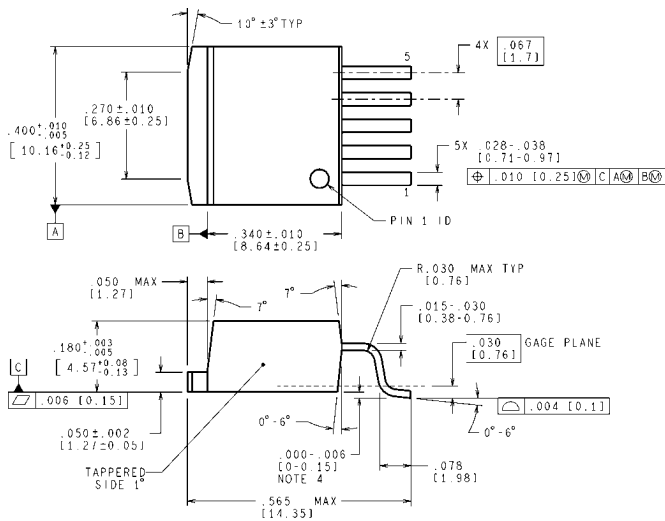


**LAND PATTERN RECOMMENDATION**

CONTROLLING DIMENSION IS INCH  
VALUES IN [ ] ARE MILLIMETERS  
DIMENSIONS IN ( ) FOR REFERENCE ONLY




**TO-263 5-Lead Plastic Surface Mount Package  
Order Number LM2941S, LM2941SX, LM2941CS or LM2941CSX  
NS Package Number TS5B**


TS5B (Rev D)

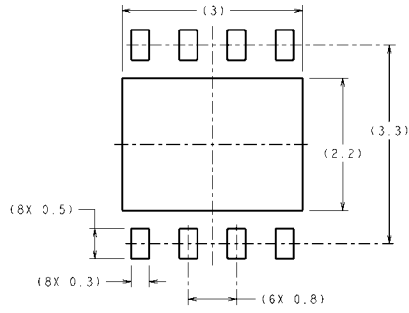

**RECOMMENDED LAND PATTERN**  
1:1 RATION WITH PKG SOLDER PADS

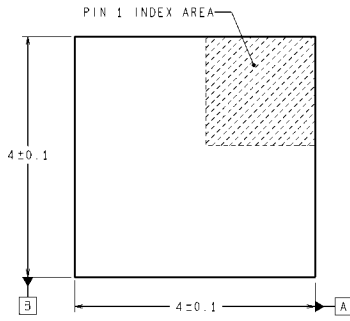

**DIMENSIONS ARE IN MILLIMETERS**  
DIMENSIONS IN ( ) FOR REFERENCE ONLY

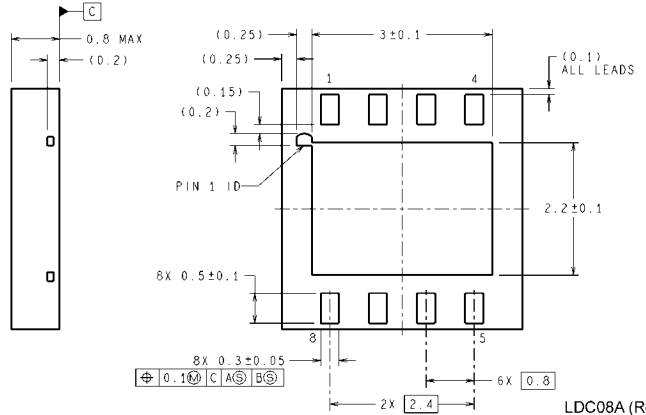

LDC08A (Rev B)

**8-Lead LLP Surface Mount Package**  
**Order Number LM2941LD, LM2941LDX**  
**NS Package Number LDC08A**

# Notes

## Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:  
[www.national.com](http://www.national.com)

| Products                       |  | Design Support               |  |
|--------------------------------|--|------------------------------|--|
| Amplifiers                     | <a href="http://www.national.com/amplifiers">www.national.com/amplifiers</a> | WEBENCH® Tools               | <a href="http://www.national.com/webench">www.national.com/webench</a>             |
| Audio                          | <a href="http://www.national.com/audio">www.national.com/audio</a>           | App Notes                    | <a href="http://www.national.com/appnotes">www.national.com/appnotes</a>           |
| Clock and Timing               | <a href="http://www.national.com/timing">www.national.com/timing</a>         | Reference Designs            | <a href="http://www.national.com/refdesigns">www.national.com/refdesigns</a>       |
| Data Converters                | <a href="http://www.national.com/adc">www.national.com/adc</a>               | Samples                      | <a href="http://www.national.com/samples">www.national.com/samples</a>             |
| Interface                      | <a href="http://www.national.com/interface">www.national.com/interface</a>   | Eval Boards                  | <a href="http://www.national.com/evalboards">www.national.com/evalboards</a>       |
| LVDS                           | <a href="http://www.national.com/lvds">www.national.com/lvds</a>             | Packaging                    | <a href="http://www.national.com/packaging">www.national.com/packaging</a>         |
| Power Management               | <a href="http://www.national.com/power">www.national.com/power</a>           | Green Compliance             | <a href="http://www.national.com/quality/green">www.national.com/quality/green</a> |
| Switching Regulators           | <a href="http://www.national.com/switchers">www.national.com/switchers</a>   | Distributors                 | <a href="http://www.national.com/contacts">www.national.com/contacts</a>           |
| LDOs                           | <a href="http://www.national.com/ldo">www.national.com/ldo</a>               | Quality and Reliability      | <a href="http://www.national.com/quality">www.national.com/quality</a>             |
| LED Lighting                   | <a href="http://www.national.com/led">www.national.com/led</a>               | Feedback/Support             | <a href="http://www.national.com/feedback">www.national.com/feedback</a>           |
| Voltage References             | <a href="http://www.national.com/vref">www.national.com/vref</a>             | Design Made Easy             | <a href="http://www.national.com/easy">www.national.com/easy</a>                   |
| PowerWise® Solutions           | <a href="http://www.national.com/powerwise">www.national.com/powerwise</a>   | Applications & Markets       | <a href="http://www.national.com/solutions">www.national.com/solutions</a>         |
| Serial Digital Interface (SDI) | <a href="http://www.national.com/sdi">www.national.com/sdi</a>               | Mil/Aero                     | <a href="http://www.national.com/milaero">www.national.com/milaero</a>             |
| Temperature Sensors            | <a href="http://www.national.com/tempensors">www.national.com/tempensors</a> | SolarMagic™                  | <a href="http://www.national.com/solarmagic">www.national.com/solarmagic</a>       |
| PLL/VCO                        | <a href="http://www.national.com/wireless">www.national.com/wireless</a>     | PowerWise® Design University | <a href="http://www.national.com/training">www.national.com/training</a>           |

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

#### LIFE SUPPORT POLICY

**NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION.** As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2011 National Semiconductor Corporation

For the most current product information visit us at [www.national.com](http://www.national.com)



**National Semiconductor  
Americas Technical  
Support Center**  
Email: [support@nsc.com](mailto:support@nsc.com)  
Tel: 1-800-272-9959

**National Semiconductor Europe  
Technical Support Center**  
Email: [europe.support@nsc.com](mailto:europe.support@nsc.com)

**National Semiconductor Asia  
Pacific Technical Support Center**  
Email: [ap.support@nsc.com](mailto:ap.support@nsc.com)

**National Semiconductor Japan  
Technical Support Center**  
Email: [jpn.feedback@nsc.com](mailto:jpn.feedback@nsc.com)