




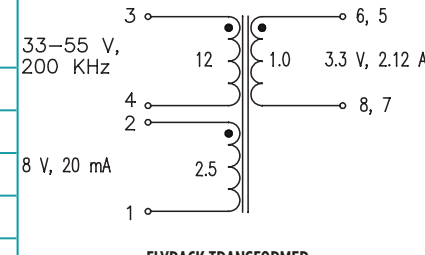
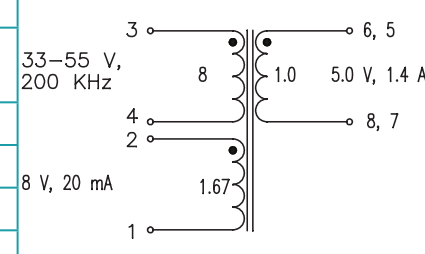
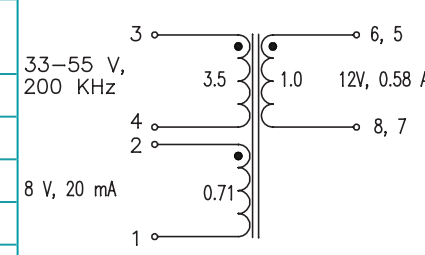


HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

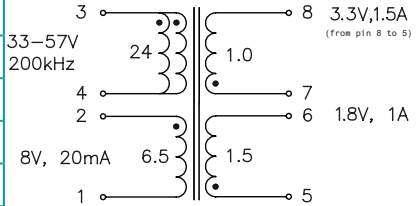
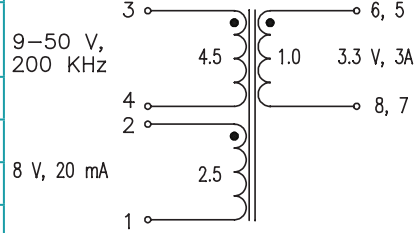
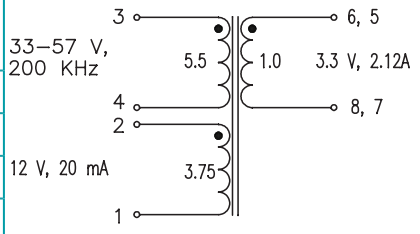
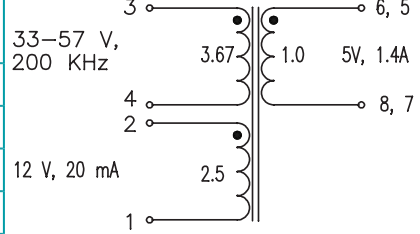


-  **Power Range:** up to 30W
-  **Height:** 11.45mm Max
-  **Footprint:** 15.24mm x 13.1mm Max
-  **Topology:** Forward and Flyback

| Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C | | | | | |
|--|-----------------|---------------------------------|---------------|--|--|
| PA1133NL | Pri. Inductance | (3-4) | 253.4μH ± 10% |  <p>33-55 V, 200 KHz 8 V, 20 mA FLYBACK TRANSFORMER</p> | |
| | Lk. Inductance | (3-4) with (8, 7, 6, 5) shorted | 7.5μH MAX | | |
| | DCR | (3-4) | 420mΩ MAX | | |
| | | (6, 5-8, 7) | 7.5mΩ MAX | | |
| | Hi-Pot | Pri-Sec | 1500Vrms | | |
| | K1 Factor | 4671.8 | | | |
| PA1134NL | Pri. Inductance | (3-4) | 253.4μH ±10% |  <p>33-55 V, 200 KHz 8 V, 20 mA FLYBACK TRANSFORMER</p> | |
| | Lk. Inductance | (3-4) with (8, 7, 6, 5) shorted | 7.5μH MAX | | |
| | DCR | (3-4) | 420mΩ MAX | | |
| | | (6, 5-8, 7) | 16mΩ MAX | | |
| | Hi-Pot | Pri-Sec | 1500Vrms | | |
| | K1 Factor | 4671.8 | | | |
| PA1135NL | Pri. Inductance | (3-4) | 264.1μH ±10% |  <p>33-55 V, 200 KHz 8 V, 20 mA FLYBACK TRANSFORMER</p> | |
| | Lk. Inductance | (3-4) with (8, 7, 6, 5) shorted | 6 μH MAX | | |
| | DCR | (3-4) | 800mΩ MAX | | |
| | | (6, 5-8, 7) | 45mΩ MAX | | |
| | Hi-Pot | Pri-Sec | 1500Vrms | | |
| | K1 Factor | 4769.7 | | | |

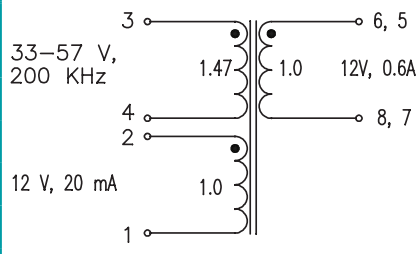
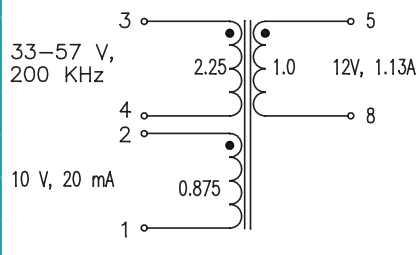
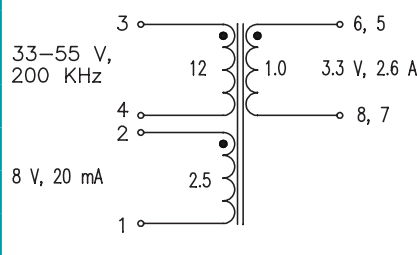
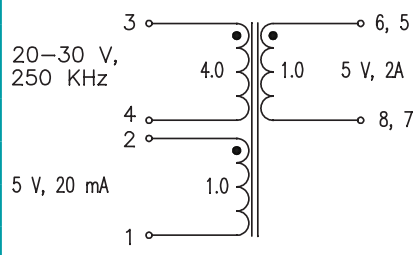
HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

| Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C | | | | |
|--|-----------------|----------------------------------|-------------------------|--|
| PA1253NL | Pri. Inductance | (3-4) | 253.4 μ H \pm 10% |  <p>FLYBACK TRANSFORMER</p> |
| | Lk. Inductance | (3-4) with (8, 7, 6, 5) shorted | 12 μ H MAX | |
| | DCR | (3-4) | 420 m Ω MAX | |
| | | (2-1) | 335 m Ω MAX | |
| | | (5-6) | 9.5 m Ω MAX | |
| | | (7-8) | 7.2 m Ω MAX | |
| | Hi-Pot | Pri-Sec | 1500Vrms | |
| KI Factor | 4671.8 | | | |
| PA1277NL | Pri. Inductance | (3-4) | 20.4 μ H \pm 10% |  <p>FLYBACK TRANSFORMER</p> |
| | Lk. Inductance | (3-4) with (10, 9, 8, 7) shorted | 1.5 μ H MAX | |
| | DCR | (3-4) | 80 m Ω MAX | |
| | | (6, 5-8, 7) | 7.5 m Ω MAX | |
| | | (2-1) | 150 m Ω MAX | |
| | Hi-Pot | Pri-Sec | 1500Vrms | |
| KI Factor | 1002.9 | | | |
| PA1282NL | Pri. Inductance | (3-4) | 155 μ H \pm 10% |  <p>FLYBACK TRANSFORMER</p> |
| | Lk. Inductance | (3-4) with (8, 7, 6, 5) shorted | 5 μ H MAX | |
| | DCR | (3-4) | 530 m Ω MAX | |
| | | (6, 5-8, 7) | 31 m Ω MAX | |
| | | (2-1) | 900 m Ω MAX | |
| | Hi-Pot | Pri-Sec | 1500Vrms | |
| KI Factor | 3117.5 | | | |
| PA1283NL | Pri. Inductance | (3-4) | 155 μ H \pm 10% |  <p>FLYBACK TRANSFORMER</p> |
| | Lk. Inductance | (3-4) with (8, 7, 6, 5) shorted | 5 μ H MAX | |
| | DCR | (3-4) | 570 m Ω MAX | |
| | | (6, 5-8, 7) | 40 m Ω MAX | |
| | | (2-1) | 1000 m Ω MAX | |
| | Hi-Pot | Pri-Sec | 1500 Vrms | |
| KI Factor | 3117.5 | | | |

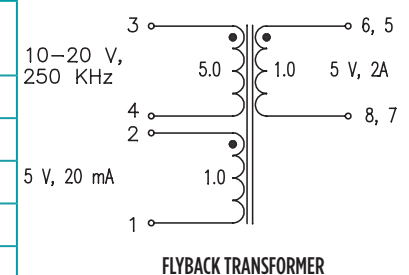
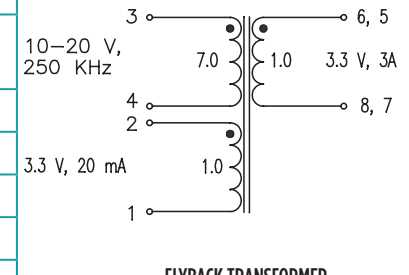
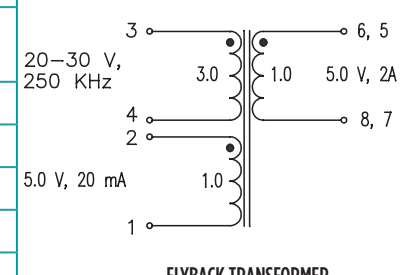
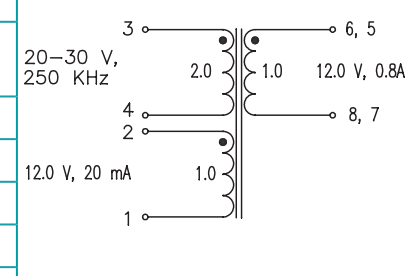
HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

| Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C | | | | |
|--|-----------------|---------------------------------------|----------------------------------|--|
| PA1284NL | Pri. Inductance | (3-4) | 155 $\mu\text{H} \pm 10\%$ |  <p>FLYBACK TRANSFORMER</p> |
| | Lk. Inductance | (3-4) with (8, 7, 6, 5) shorted | 5 $\mu\text{H} \text{ MAX}$ | |
| | DCR | (3-4) | 540 $\text{m}\Omega \text{ MAX}$ | |
| | | (6, 5-8, 7) | 370 $\text{m}\Omega \text{ MAX}$ | |
| | Hi-Pot | Pri-Sec | 1500 Vrms | |
| | KI Factor | 3117.5 | | |
| PA1370NL | Pri. Inductance | (3-4) | 20.4 $\mu\text{H} \pm 10\%$ |  <p>FLYBACK TRANSFORMER</p> |
| | Lk. Inductance | (3-4) with (8, 5) shorted | 1.5 $\mu\text{H} \text{ MAX}$ | |
| | DCR | (3-4) | 80 $\text{m}\Omega \text{ MAX}$ | |
| | | (5-8) | 30 $\text{m}\Omega \text{ MAX}$ | |
| | (2-1) | 105 $\text{m}\Omega \text{ MAX}$ | | |
| | Hi-Pot | Pri-Sec | 1500 Vrms | |
| KI Factor | 1002.9 | | | |
| PA1721NL | Pri. Inductance | (3-4) | 185 $\mu\text{H} \pm 10\%$ |  <p>FORWARD TRANSFORMER</p> |
| | Lk. Inductance | (3-4) with (8, 7, 6, 5) shorted | 10 $\mu\text{H} \text{ MAX}$ | |
| | DCR | (3-4) | 420 $\text{m}\Omega \text{ MAX}$ | |
| | | (6, 5-8, 7) | 12 $\text{m}\Omega \text{ MAX}$ | |
| | (2-1) | 115 $\text{m}\Omega \text{ MAX}$ | | |
| | Hi-Pot | Pri-Sec | 1500 Vrms | |
| KI Factor | 3410.8 | | | |
| PA2362NL | Pri. Inductance | (3-4) | 25.2 $\mu\text{H} \pm 10\%$ |  <p>FLYBACK TRANSFORMER</p> |
| | Lk. Inductance | (3-4) with (1, 2, 8, 7, 6, 5) shorted | 0.55 $\mu\text{H} \text{ MAX}$ | |
| | DCR | (3-4) | 135 $\text{m}\Omega \text{ MAX}$ | |
| | | (6, 5-8, 7) | 11 $\text{m}\Omega \text{ MAX}$ | |
| | (2-1) | 115 $\text{m}\Omega \text{ MAX}$ | | |
| | Hi-Pot | Pri-Sec | 1500 Vdc | |
| KI Factor | 1115.0 | | | |

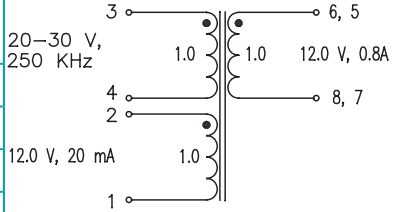
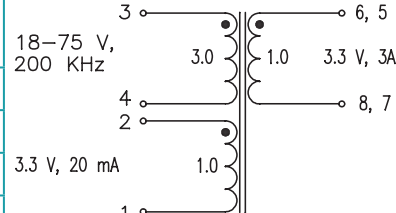
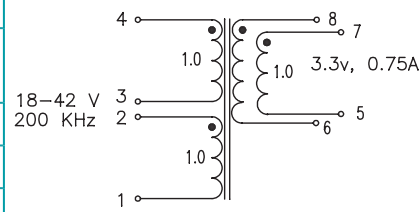
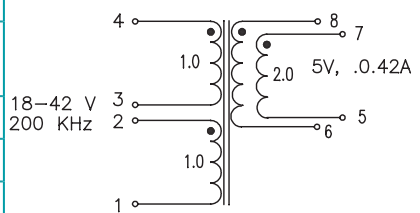
HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

| Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C | | | | |
|--|-----------------|---------------------------------------|------------------------|--|
| PA2363NL | Pri. Inductance | (3-4) | 25.2 μ H \pm 10% |  <p>FLYBACK TRANSFORMER</p> |
| | Lk. Inductance | (3-4) with (1, 2, 8, 7, 6, 5) shorted | 0.85 μ H MAX | |
| | DCR | (3-4) | 135 m Ω MAX | |
| | | (6, 5-8, 7) | 9 m Ω MAX | |
| | | (2-1) | 180 m Ω MAX | |
| | Hi-Pot | Pri-Sec | 1500 Vrms | |
| | KI Factor | 1115.0 | | |
| PA2364NL | Pri. Inductance | (3-4) | 25.2 μ H \pm 10% |  <p>FLYBACK TRANSFORMER</p> |
| | Lk. Inductance | (3-4) with (1, 2, 8, 7, 6, 5) shorted | 1 μ H MAX | |
| | DCR | (3-4) | 145 m Ω MAX | |
| | | (6, 5-8, 7) | 7.5 m Ω MAX | |
| | | (2-1) | 110 m Ω MAX | |
| | Hi-Pot | Pri-Sec | 1500 Vrms | |
| | KI Factor | 1059.4 | | |
| PA2454NL | Pri. Inductance | (3-4) | 24 μ H \pm 10% |  <p>FLYBACK TRANSFORMER</p> |
| | Lk. Inductance | (3-4) with (8, 7, 6, 5) shorted | 0.75 μ H MAX | |
| | DCR | (3-4) | 82 m Ω MAX | |
| | | (6, 5-8, 7) | 13 m Ω MAX | |
| | | (2-1) | 80 m Ω MAX | |
| | Hi-Pot | Pri-Sec | 1500 Vrms | |
| | KI Factor | 1179.9 | | |
| PA2455NL | Pri. Inductance | (3-4) | 24 μ H \pm 10% |  <p>FLYBACK TRANSFORMER</p> |
| | Lk. Inductance | (1-4) with (8, 7, 6, 5) shorted | 0.6 μ H MAX | |
| | DCR | (3-4) | 90 m Ω MAX | |
| | | (6, 5-8, 7) | 23 m Ω MAX | |
| | | (2-1) | 130 m Ω MAX | |
| | Hi-Pot | Pri-Sec | 1500 Vdc | |
| | KI Factor | 1179.9 | | |

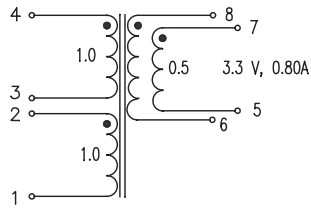
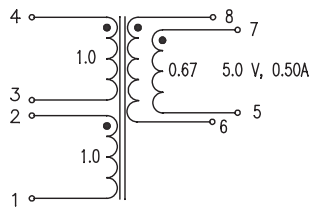
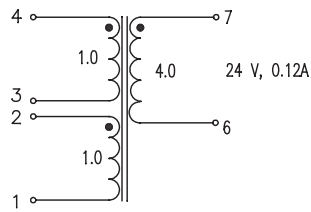
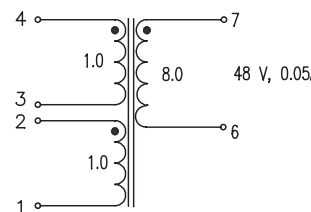
HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

| Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C | | | | | |
|--|-----------------|---------------------------------|-------------------------|---|---------------------|
| PA2456NL | Pri. Inductance | (3-4) | 24 μ H \pm 10% |  | FLYBACK TRANSFORMER |
| | Lk. Inductance | (3,4) with (8, 7, 6, 5) shorted | 0.6 μ H MAX | | |
| | DCR | (3-4) | 86 m Ω MAX | | |
| | | (6, 5-8, 7) | 86 m Ω MAX | | |
| | | (2-1) | 470 m Ω MAX | | |
| | Hi-Pot | Pri-Sec | 1500 Vrms | | |
| KI Factor | 1179.9 | | | | |
| PA2627NL | Pri. Inductance | (3-4) | 50.5 μ H \pm 10% |  | FLYBACK TRANSFORMER |
| | Lk. Inductance | (3-4) with (8, 7, 6, 5) shorted | 1.4 μ H MAX | | |
| | DCR | (3-4) | 420 m Ω MAX | | |
| | | (6, 5-8, 7) | 47 m Ω MAX | | |
| | | (2-1) | 174 m Ω MAX | | |
| | Hi-Pot | Pri-Sec | 1500 Vrms | | |
| KI Factor | 1241.4 | | | | |
| PA3948.001NL | Pri. Inductance | (4-1) with 3,2 shorted | 40 μ H \pm 10% |  | FLYBACK TRANSFORMER |
| | | (4-1) with 3,2 shorted | 32 μ H Min at 1.88A | | |
| | Lk. Inductance | (4-1) with (5, 6, 7, 8) shorted | 1.45 μ H MAX | | |
| | DCR | (3-4) | 410 m Ω MAX | | |
| | | (6, 5-8, 7)) | 140 m Ω MAX | | |
| | | (2-1) | 140 m Ω MAX | | |
| Hi-Pot | Pri-Sec | 1500 Vdc | | | |
| KI Factor | 1241.4 | | | | |
| PA3948.002NL | Pri. Inductance | (4-1) with 3,2 shorted | 40 μ H \pm 10% |  | FLYBACK TRANSFORMER |
| | | (4-1) with 3,2 shorted | 32 μ H Min at 1.88A | | |
| | Lk. Inductance | (4-1) with (5, 6, 7, 8) shorted | 1.45 μ H MAX | | |
| | DCR | (4-1) | 405 m Ω MAX | | |
| | | (8-6) | 470 m Ω MAX | | |
| | | (7-5) | 470 m Ω MAX | | |
| Hi-Pot | Pri-Sec | 1500 Vdc | | | |
| KI Factor | 983.3 | | | | |

HIGH FREQUENCY WIRE-WOUND TRANSFORMER

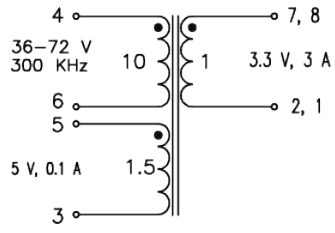
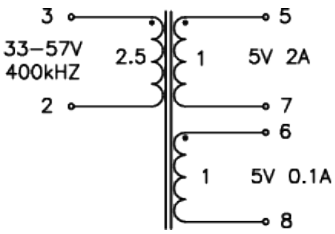
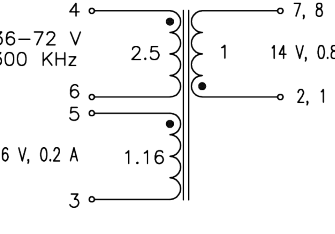
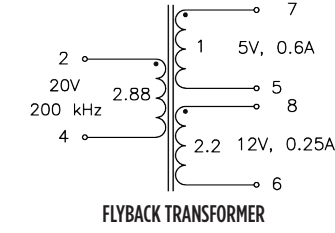
EP10 Platforms - SMT

| Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C ² | | | | |
|---|-----------------|---------------------------------|-------------------------|---|
| PA3948.003NL | Pri. Inductance | (4-1) with 3, 2 shorted | 40 μ H \pm 10% |  |
| | | (4-1) with 3, 2 shorted | 32 μ H Min at 1.88A | |
| | Lk. Inductance | (4-1) with (5, 6, 7, 8) shorted | 1.45 μ H MAX | |
| | DCR | (4-1) | 405 m Ω MAX | |
| | | (8-6) | 470 m Ω MAX | |
| | | (7-5) | 470 m Ω MAX | |
| | Hi-Pot | Pri-Sec | 1500 Vrms | |
| K1 Factor | 983.3 | | | |
| | | | | FLYBACK TRANSFORMER |
| PA3948.004NL | Pri. Inductance | (4-1) with 3, 2 shorted | 40 μ H \pm 10% |  |
| | | (4-1) with 3, 2 shorted | 32 μ H Min at 1.88A | |
| | Lk. Inductance | (4-1) with (5, 6, 7, 8) shorted | 1.45 μ H MAX | |
| | DCR | (4-1) | 220 m Ω MAX | |
| | | (8-6) | 58 m Ω MAX | |
| | | (7-5) | 58 m Ω MAX | |
| | Hi-Pot | Pri-Sec | 1500 Vrms | |
| K1 Factor | 983.3 | | | |
| | | | | FLYBACK TRANSFORMER |
| PA3948.005NL | Pri. Inductance | (4-1) with 3, 2 shorted | 40 μ H \pm 10% |  |
| | | (4-1) with 3, 2 shorted | 32 μ H Min at 1.88A | |
| | Lk. Inductance | (4-1) with (5, 6, 7, 8) shorted | 1.6 μ H MAX | |
| | DCR | (4-1) | 220 m Ω MAX | |
| | | (7-6) | 1275 m Ω MAX | |
| | Hi-Pot | Pri-Sec | 1500 Vrms | |
| | K1 Factor | 983.3 | | |
| | | | | FLYBACK TRANSFORMER |
| PA3918.006NL | Pri. Inductance | (4-1) with 3, 2 shorted | 40 μ H \pm 10% |  |
| | | (4-1) with 3, 2 shorted | 32 μ H Min at 1.88A | |
| | Lk. Inductance | (4-1) with (5, 6, 7, 8) shorted | 1.65 μ H MAX | |
| | DCR | (4-1) | 220 m Ω MAX | |
| | | (7-6) | 3350 m Ω MAX | |
| | Hi-Pot | Pri-Sec | 1500 Vrms | |
| | K1 Factor | 983.3 | | |
| | | | | FLYBACK TRANSFORMER |

HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EP10 Platforms - SMT

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C²

| Model | Parameter | Configuration | Value | Diagram |
|-----------|-----------------|----------------------------------|------------------------|--|
| PB2115NL | Pri. Inductance | (4-6) | 25.2 μ H \pm 10% |  <p>FLYBACK TRANSFORMER</p> |
| | Lk. Inductance | (4-6) with (1,2,3,4,7,8) shorted | 1.45 μ H MAX | |
| | DCR | (4-6) | 250 m Ω MAX | |
| | | (7, 8-2,1) | 3.3 m Ω MAX | |
| | | (7-5) | 20 m Ω MAX | |
| | Hi-Pot | Pri-Sec | 1500 Vrms | |
| K1 Factor | | 1115.0 | | |
| PG0686NL | Pri. Inductance | (3-2) | 40 μ H \pm 7% |  <p>FLYBACK TRANSFORMER</p> |
| | Lk. Inductance | (3-2) with (5, 6, 7, 8) shorted | 0.05 μ H MAX | |
| | DCR | (3-2) | 98 m Ω MAX | |
| | | (5-7) | 50 m Ω MAX | |
| | | (6-8) | 65 m Ω MAX | |
| | Hi-Pot | Pri-Sec | 1650 Vrms | |
| K1 Factor | | 1769.9 | | |
| PG0721NL | Pri. Inductance | (4-6) | 75 μ H \pm 15% |  <p>FLYBACK TRANSFORMER</p> |
| | Lk. Inductance | (4-6) with (1,2,3,5,7,8) shorted | 1 μ H MAX | |
| | DCR | (4-6) | 110 m Ω MAX | |
| | | (7,8-2,1) | 35 m Ω MAX | |
| | | (5-3) | 85 m Ω MAX | |
| | Hi-Pot | Pri-Sec | 1500 Vrms | |
| K1 Factor | | 4424.8 | | |
| PG0855NL | Pri. Inductance | (2-4) | 33.1 μ H \pm 15% |  <p>FLYBACK TRANSFORMER</p> |
| | DCR | (2-4) | 140 m Ω MAX | |
| | | (8-6) | 115 m Ω MAX | |
| | | (7-5) | 40 m Ω MAX | |
| | Hi-Pot | Pri-Sec | 1000 Vrms | |
| K1 Factor | | 1126.6 | | |

HIGH FREQUENCY WIRE-WOUND TRANSFORMER

EPI0 Platforms - SMT

Notes:

1. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
2. The above transformers and inductors have been tested and approved by Pulse's power IC partners and are sited in the appropriate datasheet or evaluation board documentation at these companies. To determine which IC and IC partners are matched with the above Pulse part numbers please consult the IC Cross Reference on the Pulse website.
3. For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700Gauss. To calculate the peak density, use the following formula:

$$B_{pk} \text{ (Gauss)} = K1_Factor * I_{pk} \text{ (A)}$$
4. In high volt-sec applications, it is important to calculate the core loss of the transformer. Approximate transformer core loss can be calculated as:

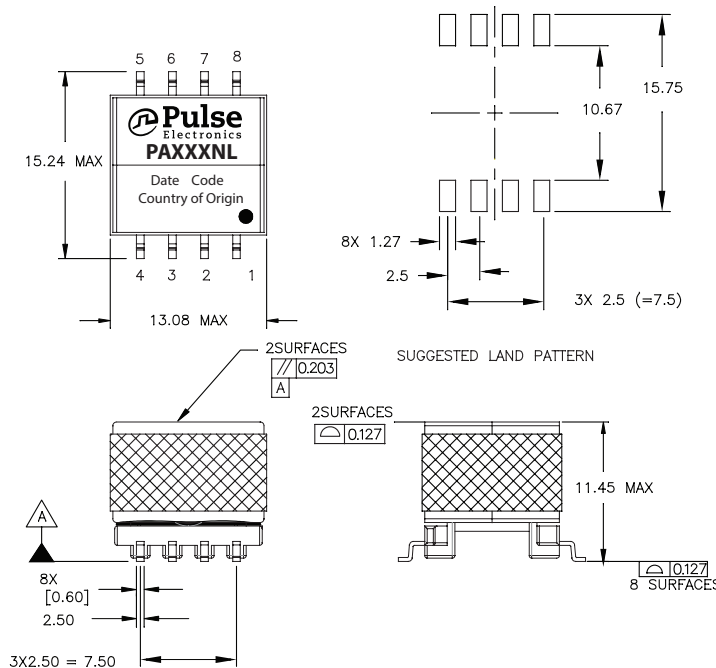
6. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA1136NL becomes PA1136NLT). Pulse complies with industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=32mm), pitch (Po=24mm) an depth (Ko=13.2mm).

$$CoreLoss \text{ (W)} = 2.5E-14 * (Freq_kHz)^{1.63} * (\Delta B_Gauss)^{2.63}$$

where ΔB can be calculated as:
 For Flyback Topology: $\Delta B = K1_Factor * (A)$
 For Forward Topology: $\Delta B = K1_Factor * Volt-\mu sec$

Mechanical

PAXXXXNL



For More Information

Pulse Worldwide Headquarters

15255 Innovation Drive Ste 100
 San Diego, CA 92128
 U.S.A.

Pulse Europe

Pulse Electronics GmbH
 Am Rottland 12
 58540 Meinerzhagen
 Germany

Pulse China Headquarters

Pulse Electronics (ShenZhen) CO., LTD
 D708, Shenzhen Academy of
 Aerospace Technology,
 The 10th Keji South Road,
 Nanshan District, Shenzhen, P.R.
 China 518057

Pulse North China

Room 2704/2705
 Super Ocean Finance Ctr.
 2067 Yan An Road West
 Shanghai 200336
 China

Pulse South Asia

3 Fraser Street
 0428 DUO Tower
 Singapore 189352

Pulse North Asia

1F, No.111
 Xiyuan Road
 Zhongli District
 Taoyuan City 32057
 Taiwan (R.O.C)

Tel: 858 674 8100
 Fax: 858 674 8262

Tel: 49 2354 777 100
 Fax: 49 2354 777 168

Tel: 86 755 33966678
 Fax: 86 755 33966700

Tel: 86 21 62787060
 Fax: 86 2162786973

Tel: 65 6287 8998
 Fax: 65 6280 0080

Tel: 886 3 4356768
 Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2018. Pulse Electronics, Inc. All rights reserved.