

JANUS REMOTE COMMUNICATIONS

LTE910XFX v1.00 4G Worldwide Embedded CAT1 Cellular Modem

Description

The Janus line of “X” Footprint (XF) embedded modems are footprint compatible cellular modems for use in LTE communication networks globally. They are carrier “end device certified” with industry standard 20-pin headers that are easily integrated into new and existing designs.

The LTE910XFX v1.00 CAT1 embedded modem uses the Telit LE910C1-WWxD as its cellular engine and has global PTCRB, AT&T, Verizon and RED certifications*.

The LTE910XFX v1.00 units operate in CAT1 LTE 4G, 3G, and 2G bands and are capable of worldwide operation (see below).

* Certifications pending

Technical Specifications

- Data Rate: LTE: 10D/5U Mbps

- Multi-Band Support
 - 4G (LTE): B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B14, B18, B19, B20, B25, B26 and B28
 - 3G (HSPA+): B1, B2, B4, B5, B6, B8, and B19
 - 2G: B2, B3, B5, and B8

- TCP/IP stack access via AT commands

- SMS (MO / MT)

- Output power: Class 3 (0.2W, 23 dBm) @ LTE

- Dimensions: 1.19” x 1.37” x 0.256”

- Operational temperature range: -40°C to 85°C

- Internal Switching Regulator:
 - Input Voltage Range: 3.4 to 5.5 Vdc (5Vdc nominal)
 - Supply disable via terminal input pin

- Variable logic level (UART/GPIO)
 - Adjustable from 1.2 - 5.5 Vdc

- SIM Card
 - 3FF micro SIM card socket

- Antenna:
 - Cellular and GNSS antenna ports
 - U.FL miniature RF connectors

- GNSS
 - Stand alone GPS, GLONASS, Beidou, Galileo, and QZSS available at AT command interface
 - A-GPS support
 - NMEA data
 - GNSS antenna connection w/active antenna support

- Command and Data Interface:
 - UART
 - USB 2.0



The LTE910XFX v1.00 modems are part of the CellBridge™ Janus Products.

CellBridge™

Features

- Industry Standard 20-Pin Connector Footprint
- 2 U.FL port for antenna diversity
- Easy migration path, future-proof
- Development kits available

Advantages

- Approvals: PTCRB, AT&T, Verizon and RED certifications (Pending)
- Migration path to new LTE Bands

Applications

- Fleet Management
- Asset Tracking
- Security Systems
- Telemetry
- Telematics & Telecontrol
- Remote Monitoring Systems
- Remote Meter Reading
- Vending Machines


2359 Diehl Road
Aurora, IL 60502
630.499.2121
info@janus-rc.com
www.janus-rc.com

Bulletin JA20-PB LTE910XFX-v1
Revision 00
Date 23 June 2022



Making machines talk.

LTE910XFX v1.00 CAT1 Mechanical Drawing

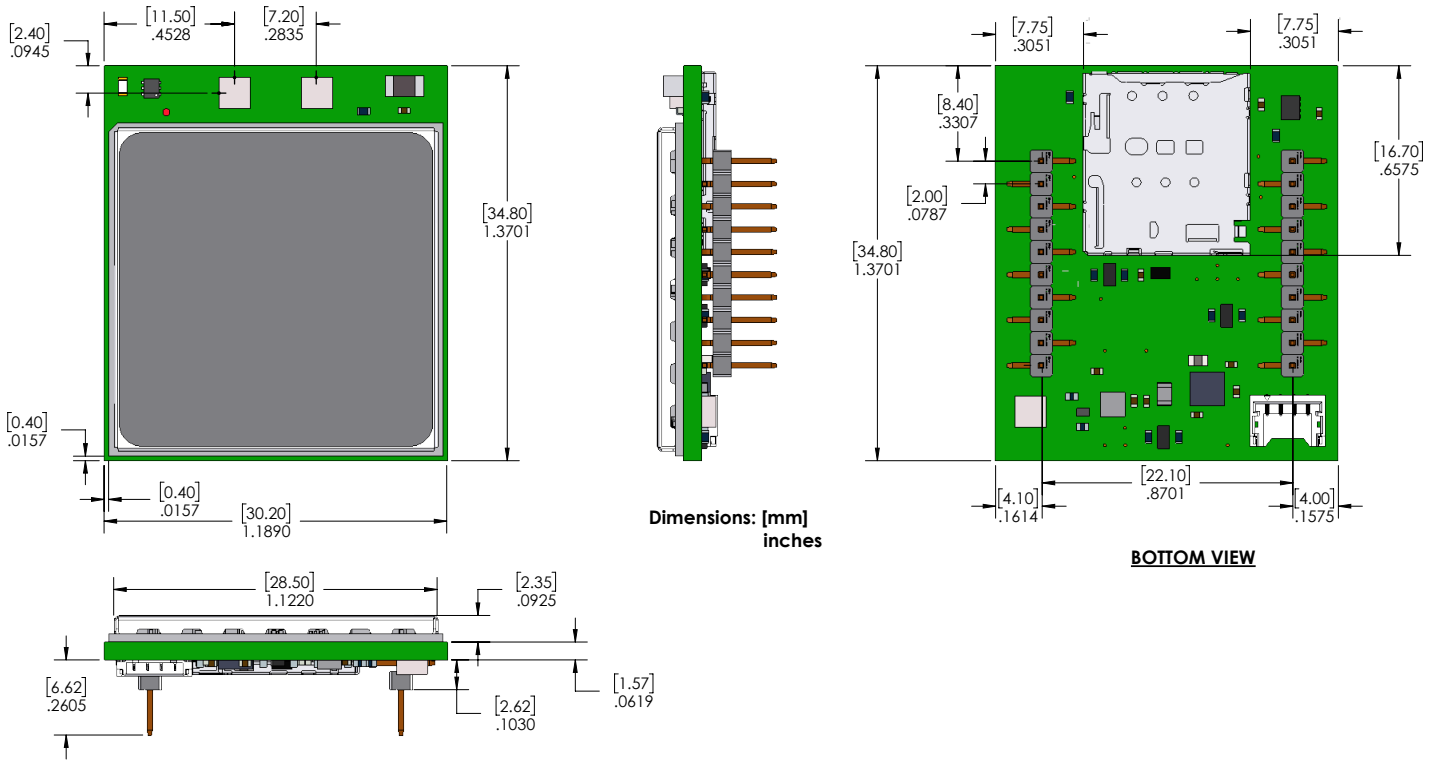

Ordering Information

LTE910XFX	V100	T	x	H	3	S
Cellular Terminal LTE LTE910XFX	Carrier Certified & Version LTE v1.00 CAT1	Modem Provider T = Telit	Firmware * Call Sales Rep for most recent firmware version.	SIM Holder H = Mech Holder	SIM Size 3 = 3FF Micro	Power S = Standard Power

Example: Part Number – LTE910XFXV100TAH3S = LTE Cellular XF Embedded Modem; Telit Modem; Current Firmware; Mech SIM Holder; SIM Card Size 3FF; Standard Power

Contact Sales for Additional Special Order Options: Dave Jahr: djahr@janus-rc.com | 630-499-2121

Revision History

Revision	Revision Date	Note
00	06/23/22	Initial Release

JANUS REMOTE
COMMUNICATIONS

Division of The Connor-Winfield Corporation
2359 Diehl Road • Aurora, IL 60502
630.499.2121 • info@janus-rc.com
www.janus-rc.com

CellBridge™
Global Cellular Modem Solutions

© Copyright 2022 Janus Remote Communications | Specifications subject to change without notice
All Rights Reserved | See website for latest revision. | Not intended for life support applications.