






Note: The servo cannot be used on its own as no communication interface is included with the servo. The suggested serial interface is the [LSS Adapter](#) (USB, Arduino, Bee socket compatible), though most 5 V USB to serial adapters can be used (be sure to provide power separately). Any RC system can be used, though 6-12 V power to the LSS servo(s) should be provided separately.

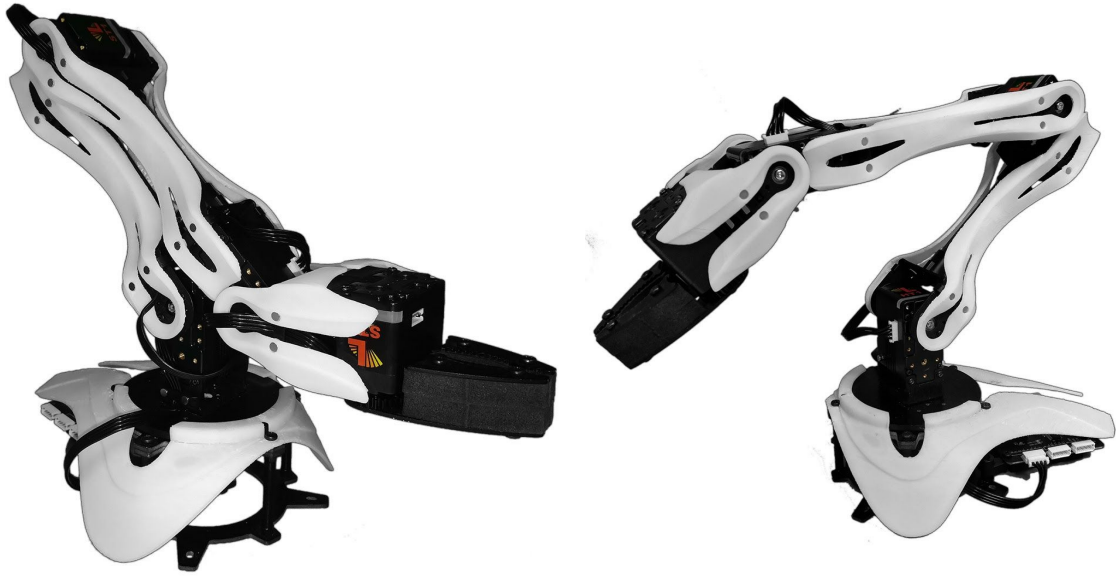

[Lynxmotion \(LSS\) - 4 DoF Robotic Arm \(assembled\)](#) - Example of Smart Servos Integration

### Brackets

Lynxmotion's Smart Servos are designed to be part of the Lynxmotion Servo Erector Set (SES) modular robot building system and are compatible with dozens of brackets and frame components.




### Electronics



[Lynxmotion \(LSS\) - Adapter Board](#) is an electronic board which allows for easy connection to and control of the Lynxmotion Smart Servos. The board includes a variety of features and functions as a central power distribution board via six LSS connectors.

The [Lynxmotion Smart Servo \(LSS\) - Power Hub](#) provides a simple solution to supply power to and communicate with the smart servos. It is also a useful tool to split the LSS bus from one servo to two or three while allowing these servos to be powered separately. The Power Hub can be mounted directly to the servos.

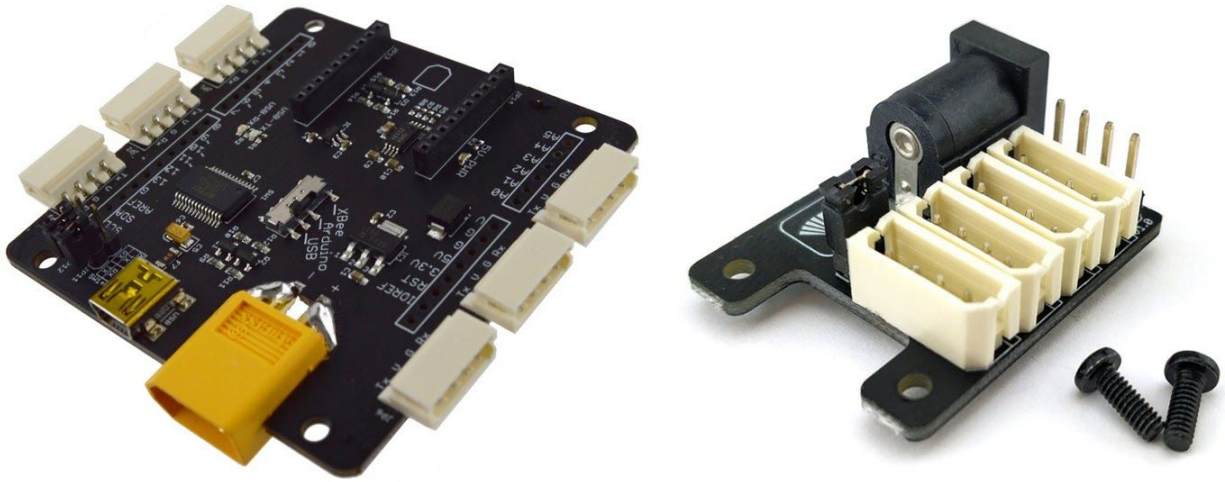

### External Gears

Custom designed gears can be used to provide external gearing for the Lynxmotion Smart Servo (LSS) motors.



### Assemblies

The [Lynxmotion \(LSS\) - Geared Gripper Kit](#) is made of durable aluminum plates and standoffs and uses foam to conform to the object being grasped. Inner teeth on the aluminum help "bite" into objects when necessary.



### Software

The [Lynxmotion \(LSS\) - Configuration Software](#) provides easy access to viewing and modifying of the various settings that control the main features and functionality of the Lynxmotion Smart Servo Motors as well as allowing firmware updates.

The screenshot displays the LSS Config software interface. At the top left is the Lynxmotion logo and tagline. The top right shows the version (v362), mode (FIRMWARE), and communication settings (COM COM14, DISC). The main area is divided into several sections:

- Position Indicator:** A circular dial showing the servo's current position (0 degrees) and range (-180 to 180 degrees).
- Graph:** A multi-axis graph showing Position (blue), Speed (green), Current (red), Voltage (yellow), and Temp. (grey) over time. The current graph shows a pulse-width modulation (PWM) signal.
- Control Panel:** Includes buttons for 'Send', 'E-STOP!', 'Hold', and 'Update'. It also features a 'CONFIGURATIONS' menu with various settings like Servo ID, LED color, Baud rate, Origin offset, Angular rng., Gyre dir., Max speed (RPM), and Stiffness.
- Terminal Window:** Displays real-time communication logs, including status updates and connection information for the servo motor.

©2019 RobotShop inc. All rights reserved.



## Specifications

- Nominal Voltage (recommended): 12 V (6 V min, 12.6 V max)
- Torque, max. static at 12 V: 29 kg-cm
- Torque, max dynamic at 12 V: 5.8 kg-cm
- Speed, no load at 12 V: 60 RPM
- Current, no load, standby at 12 V: 70 mA
- Current, stall at 12 V: 800 mA
- Operating temperature range: 45°C~85°C
- Spline: 24 Teeth (compatible with Hitec standard spline)
- DC Motor: Coreless
- Gear ratio: 1:320
- Gear material: Steel
- Operating angle: 360° absolute and virtual multi-turn
- Communication type: TTL full duplex asynchronous serial or RC PWM.
- Communication protocol: Custom Lynxmotion Smart Servo (LSS)
- Baudrate range: 9600 bps ~ 921600 bps
- Baudrate (recommended) : 115200bps
- Connector: Molex 4-pin, 2.54mm Low Profile (pinout: Rx | Vcc | GND | Tx)
- Weight: 63 g

## What's Included

- Lynxmotion Smart Servo - High Torque (HT1)
- Aluminum driving horn (SES pattern) pre-assembled
- Idler horn (SES pattern) pre-assembled
- Cable: 150mm long 4-pin Molex to 4-pin Molex
- Cable: 150mm long 4-pin Molex to 3-pin 2.54mm "RC Standard" connector plus 2.54mm single pin connector

## Useful Links

### Website

- [Lynxmotion Website - Home](#)

### Wiki

- [Lynxmotion Wiki - Home](#)



- [Lynxmotion Wiki - Lynxmotion Smart Servo \(LSS\)](#)
- [Lynxmotion Wiki - LSS Libraries \(Arduino, Python, etc.\)](#)

## Dimensions

- 51mm x 25mm x 38.3mm (case only)

## Multimedia

<https://www.youtube.com/watch?v=pMNxJWB93ac>

[https://www.youtube.com/watch?v=\\_ZmqH72b4RU](https://www.youtube.com/watch?v=_ZmqH72b4RU)