

# *Bluetooth*<sup>®</sup> Module

EYSFDCAXW (RF+Baseband (Class 2) UART)

Data Report

In case you adopt this module and design some appliance, please ask for the latest specifications from the local sales office.

The *Bluetooth*<sup>®</sup> word mark and logos are owned by the *Bluetooth* SIG, Inc. and any use of such marks by TAIYO YUDEN CO., LTD. is under license.

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative**Document constituent list**

| <b>Control name</b>        | <b>Control No.</b> | <b>Document Page</b> |
|----------------------------|--------------------|----------------------|
| General Items              | HD-AG-A051089      | 3/47 - 5/47          |
| Absolute maximum ratings   | HD-AM-A051089      | 6/47                 |
| Electrical characteristics | HD-AE-A051089      | 7/47 - 11/47         |
| Electrical characteristics | HD-AE-B051089      | 12/47 - 14/47        |
| Electrical characteristics | HD-AE-C051089      | 15/47 - 27/47        |
| Electrical characteristics | HD-AE-D051089      | 28/47 - 37/47        |
| Circuit schematic          | HD-MC-A051089      | 38/47                |
| Outline / Appearance       | HD-AD-A051089      | 39/47 - 40/47        |
| Outline / Appearance       | HD-AD-B051089      | 41/47                |
| Pin Layout                 | HD-BA-A051089      | 42/47 - 43/47        |
| Schematic Sample           | -                  | 44/47 - 45/47        |
| BOM Sample                 | -                  | 46/47 - 47/47        |

## Rev. record

20-Dec.-2005&gt; Ver.1.0 Draft (Only for Web Catalog)

22-Feb.-2006&gt; Ver.1.4 Up-Date

**EYSFDCAWX**TAIYO YUDEN Confidential  
& Tentative

|                              |       |                               |
|------------------------------|-------|-------------------------------|
| Control No.<br>HD-AG-A051089 | (1/3) | Control name<br>General Items |
|------------------------------|-------|-------------------------------|

## Scope

This specification (“Specification”) applies to the hybrid IC “EYXFDCA” for use **Bluetooth**<sup>®</sup> module (“Product”) manufacture by TAIYO YUDEN Co., Ltd. (“TAIYO YUDEN”)

1. User’s Code: EYSFDCAWX (UART I/F Support)
  - Digit3: Customer Code   ex) S: TAIYO YUDEN Standard
  - Digit8: Hardware Code   ex) X: TAIYO YUDEN Standard
  - Digit9: Software Code   ex) W

**\* User’s Code may be modified for mass production or other cases.  
Please see “m” for more information.**

Type: EYXFDCA
2. Function: Radio frequency transfer Module (power class 2). **Bluetooth**<sup>®</sup> standard Ver 2.0+EDR conformity
3. Application: PC peripheral, Handy terminal
4. Structure: Hybrid IC loaded with silicon monolithic semiconductor
5. Outline: Board to Board Connector Type
6. Marking: TELEC logo mark, ARIB, TELEC qualification number, Type, Manufacture (Japanese), Manufacture (English), User’s Code, Product Lot number and Country of manufacture on Shielding Case. BD address number, User’s Code, FCC ID, IC (Industry Canada) ID, CE mark and Manufacture (English) on label.
  - TELEC: 001NYCA1293
  - FCC: RYYEYXFDC
  - IC: 4389A-EYXFDC
  - CE: CE0560
7. Features:
  - Bluetooth**<sup>®</sup> 2.0+EDR conformity
  - UART Interface: Baud Rate 115.2kbps
  - Point-to-Multipoint (7 Slaves)
  - Encryption
  - Hold, Sniff and Park Mode
  - Supported Link Type: ACL (Not support Voice Over HCI)
  - AFH&Co-existence
  - EDR(Enhanced Data Rate)
8. Packing:
  - Packaging method: Tray(Soft Tray)
  - Packaging unit: 15pieces/Tray  
105pieces/Box
  - Material of tray: Conductive PET
9. Terminal: Data input-output (20pin Board to Board Connector)  
RF input-output (Antenna)
10. Mount: Mounted with M2 screw
11. Notes:
  - a. Any question arising from this Specification shall be solved through mutual discussion by the parties hereof.
  - b. This Product is not designed for radiation durable and should not be used under the circumstance of radiation.
  - c. The operating conditions of this Product are as shown in this Specification. Please note that TAIYO YUDEN shall not be liable for a failure and/or abnormality which is caused by use under the conditions other than the operating conditions hereof.

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |       |                               |
|------------------------------|-------|-------------------------------|
| Control No.<br>HD-AG-A051089 | (2/3) | Control name<br>General Items |
|------------------------------|-------|-------------------------------|

- d. This Product mentioned in this Specification is manufactured for use in PC peripheral and Handy terminal. Before using this Product in any special equipment (such as medical equipment, space equipment, air craft, disaster prevention equipment), where higher safety and reliability are duly required, the applicability and suitability of this Product must be fully evaluated by the customer at its sole risk to ensure correct and safety operation of those special equipments. Also, evaluation of the safety function of this Product even for use in general electronics equipment shall be thoroughly made and when necessary, a protective circuit shall be added in design stage, all at the customer's sole risk.
- e. TAIYO YUDEN warrants only that this Product is in conformity with this Specification for one year after purchase and shall in no event give any other warranty.
- f. The warranty period shall be one year.
- g. Communication between this Product and others might not be established nor maintained depending upon radio environment or operating conditions of this Product and other **Bluetooth**<sup>®</sup> products.
- h. This Product is designed for use in products which comply with **Bluetooth**<sup>®</sup> Specifications (Ver 2.0+EDR) ("Bluetooth Specifications"). TAIYO YUDEN disclaims and is not responsible for any liability concerning infringement by this Product under any intellectual property right owned by third party in case the customer uses this Product in any product which does not comply with Bluetooth Specifications (the "non-complying products"). Furthermore, TAIYO YUDEN warrants only that this Product complies with this Specification and does not grant any other warranty including warranty for application of the non-complying products.
- i. TAIYO YUDEN does not render updating or upgrading service for the firmware in the Module.
- j. In order to take tests for getting the certification of each country's Radio Law with a device incorporating this module, it is necessary to make the software in Host to put the module into test condition.
- k. Please evaluate adequately our module incorporated to your products before mass production.
- l. This Product operates in the unlicensed ISM band at 2.4GHz. In case this Product is used around the other wireless devices which operate in same frequency band of this Product, there is a possibility that interference occurs between this Product and such other devices. If such interference occurs, please stop the operation of other devices or relocate this Product before using this Product or do not use this Product around the other wireless devices.
- m. User's Code Modification Notice (**Bluetooth**<sup>®</sup> Modules)  
User's Code may be modified based on mass production stage, **Bluetooth**<sup>®</sup> logo Qualification stage, or other related stages.  
Please see the following examples for cases that User's Code are modified:
- for specific firmware version (our standard item firmware will be upgraded occasionally)
  - for specific BD address (our standard item BD address is owned by TAIYO YUDEN )
  - for different baud rate (our standard is 115.2kbps)
  - for specific USB ID (our standard item USB ID is owned by TAIYO YUDEN or chip manufacture)
  - for other related cases (specific or different setting, form, sizes, or display etc..)
- In case you have applied for **Bluetooth**<sup>®</sup> Qualification with our standard User's Code without previous notice to TAIYO YUDEN, we shall not be responsible for any expense that will be required to change its name/number.

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |       |                               |
|------------------------------|-------|-------------------------------|
| Control No.<br>HD-AG-A051089 | (3/3) | Control name<br>General Items |
|------------------------------|-------|-------------------------------|

n. Containment of hazardous substance in this Product

\*Pb (Lead) : Non use

\*Additional RoHS regulation substance (Cd.Hg.Cr+6.PBB.PBDE) :Non use

p. In addition when this Product is used under environmental conditions such as over voltage which are not guaranteed ,it may be destroyed in short mode. To ensure the security of customer's product, please add an extra fuse or/and a protection circuit for over voltage.

This module is still under development, thus specifications do not guarantee both the quality and reliability at the time of shipment. Since the specifications and mass production of the module are not confirmed either, the contents of the technical notes are subject to change without any prior notice.

**EYSFDCAWX**TAIYO YUDEN Confidential  
& Tentative

|                                    |  |
|------------------------------------|--|
| Control No.<br>HD-AM-A051089 (1/1) | Control name<br>Absolute maximum ratings |
|------------------------------------|--|

**Absolute maximum ratings**

| Item           | Symbol   | Rating |      |         |      | Remark                                |
|----------------|----------|--------|------|---------|------|---------------------------------------|
|                |          | Min.   | Typ. | Max.    | Unit |                                       |
| Supply voltage | VDD_3.3V | -0.3   |      | 3.6     | V    | Ta=25 degrees C,<br>GND reference     |
| Input voltage  | Vin      | -0.3   |      | VDD+0.3 | V    | I/O terminals except<br>USB interface |

**Recommendation operating range**

| Item                                     | Symbol   | Rating |      |      |           | Remark                     |
|--|----------|--------|------|------|-----------|----------------------------|
|  |          | Min.   | Typ. | Max. | Unit      |                            |
| Supply voltage                           | VDD_3.3V | 3.0    | 3.3  | 3.6  | V         |                            |
| Supply voltage ripple<br>and spike noise | VDD_rn   |        |      | 30   | mVp-p     | Note 1 )                   |
| Operation temperature<br>range           | Topr     | -25    | 25   | 75   | Degrees C | Humidity=40%RH<br>Note 2 ) |
| Storage temperature<br>range             | Tstg     | -30    | 25   | 85   | Degrees C | Humidity=40%RH<br>Note 3 ) |

## Notes:

- 1). To fill the standard of "Supply voltage ripple and spike noise", the capacitor, which has the capacity of 2.2uF or more, should be put in the terminal VDD\_3.3V outside as a bypass capacitor.
- 2). Operating temperature range is set to satisfy products electrical characteristics in the short term. In terms of product life cycle when it is used in condition of varying from TYP standard in the long term, please refer to the reliability condition.
- 3). Storage temperature range is the condition for transportation and storage in temporary.

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |       |  |
|------------------------------|-------|--|
| Control No.<br>HD-AE-A051089 | (1/5) | Control name<br>Electrical characteristics |
|------------------------------|-------|--|

Electrical characteristic

**DC Specifications**

The Specification applies for Topr.= 25 degrees C, VDD\_3.3V=3.3V

| No. | Parameter             | Condition   | Symbol   | Min.             | Typ. | Max.             | Unit | Remark        |
|-----|-----------------------|---|----------|------------------|------|------------------|------|---------------|
| 1   | Normal supply voltage |   | VDD_3.3V | 3.0              | 3.3  | 3.6              | V    |               |
| 2   | Input Low Voltage1    | /RESET, PIOX, PCM_IN,<br>PCM_SYNC,<br>PCM_CLK,<br>UART_CTS, UART_RX | VIL1     | -0.3             |      | 0.8              | V    |               |
| 3   | Input High Voltage1   | /RESET, PIOX, PCM_IN,<br>PCM_SYNC,<br>PCM_CLK,<br>UART_CTS, UART_RX | VIH1     | 0.7xVDD<br>_3.3V |      | VDD_3.3V<br>+0.3 | V    |               |
| 4   | Output Low Voltage1   | PIOX, PCM_OUT,<br>PCM_SYNC,<br>PCM_CLK, UART_TX,<br>UART_RTS        | VOL1     | -                |      | 0.4              | V    | IOL=4mA       |
| 5   | Output High Voltage1  | PIOX, PCM_OUT,<br>PCM_SYNC,<br>PCM_CLK, UART_TX,<br>UART_RTS        | VOH1     | VDD_3.3V-0.4     |      | -                | V    | IOH =-4mA     |
| 6   | Peak current          | Continuous Rx   | Iccp1    |                  | 40   | 120              | mA   | Notes 3, 4    |
| 7   | Average current1      | Sniff mode (Slave only)   | Icca1    |                  | 7    | -                | mA   | Notes 1, 3, 4 |
| 8   | Average current2      | Standby mode  | Icca2    |                  | 2    | -                | mA   | Notes 3, 4    |
| 9   | Average current3      | Send DM1packet<br>(Master)  | Icca3    |                  | 37   | -                | mA   | Notes 3, 4    |
| 10  | Average current4      | Receive DM1packet<br>(Slave)  | Icca4    |                  | 38   | -                | mA   | Notes 3, 4    |
| 11  | Average current5      | Hold mode (Slave only)  | Icca5    |                  | 2    | -                | mA   | Notes 3, 4    |
| 12  | Average current6      | Park mode (Slave only)  | Icca6    |                  | 3    | -                | mA   | Notes 2, 3, 4 |

Notes:

- Sniff mode parameter. Max interval 0050h  
Min interval 0010h  
Attempt 0005h  
Timeout 0005h
- Park mode parameter. Max interval 0100h  
Min interval 0010h
- The consumption current might fluctuate with the condition of radio communication, host performance and test circuit.
- The value may fluctuate several [mA] depending on Firmware version.

**EYSFDCAWX**TAIYO YUDEN Confidential  
& Tentative

|                                       |  |
|---------------------------------------|--|
| Control No.<br>HD-AE-A051089<br>(2/5) | Control name<br>Electrical characteristics |
|---------------------------------------|--|


**AC Specifications**

The Specification applies for Topr.= 25 degrees C, VDD\_3.3V=3.3V

| No. | Parameter                          | Condition | Symbol | Min  | Typ     | Max  | Unit | Remark        |
|-----|------------------------------------|-----------|--------|------|---------|------|------|---------------|
| 1   | VDD_3.3V Rise Time from 0V to 3.0V |           | t1     | 0    |         | 2    | ms   |               |
| 2   | VDD_3.3V=3.0V to RESET high        |           | t2     | 10   |         |      | ms   | Notes 1, 2    |
| 3   | RESET high to Module Ready         |           | t3     |      | ( 500 ) | 3000 | ms   | Notes 3, 4, 5 |
| 4   | RESET pulse width                  |           | t4     | 6    |         |      | ms   | Note 6        |
| 5   | /RESET Low to VDD_3.3V Off         |           | t5     | 0    |         |      | ms   |               |
| 6   | /RESET High to /RESET Low          |           | t6     | 3000 |         |      | ms   | Note 4        |

## Notes:

- This module has an internal flash memory and a function to erase/sort unnecessary data if certain HCI commands are issued and consume more than a certain level of free space in the flash memory. This operation occurs at every module initialization (power-on).  
If supply voltage becomes non-defined states during initialization or writing in flash memory, data in flashmemory might be destroyed. If the data in flash memory is destroyed, module will not work correctly. Therefore please be sure to stabilize power source before RESET release.  
In addition please design module peripheral circuits to avoid temporary blackout of power source during operation. Please refer HD-AE-C 051089 for HCI command which rewrites flash memory data.
- Input /RESET signal of 10ms and more in condition of VDD\_3.3V at over 3.0V.
- When the module is ready to accept the command, its module outputs the "04 0F 04 00 01 00 00" (Hex) to the UART TX Data Line. After that, please access to the module.
- Some of User Settings are stored in flash memory writable memory area and flash memory free space is controlled by Firmware. When the free space in flash memory is lower than certain amount, Defrag automatically starts. Amount of time required for Defrag will vary depending on the environment. Please conduct enough verification for the time required for the customer's product under customer's environment before use.
- The Typ. is a reference value. The value may change depending on the firmware version, conditions of use and types of flash memory.
- Internal RESET composes of the circuit shown below. /RESET signal must be driven by open drain. Please in put low voltage or open (1M ohm and over).

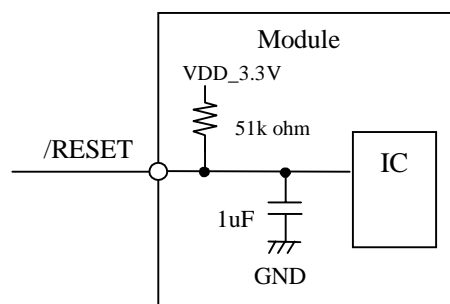

Equivalent Circuit of Internal Reset


**TAIYO YUDEN**




# EYSFDCAWX

TAIYO YUDEN Confidential  
& Tentative

|                              |       |  |
|------------------------------|-------|--|
| Control No.<br>HD-AE-A051089 | (3/5) | Control name<br>Electrical characteristics |
|------------------------------|-------|--|

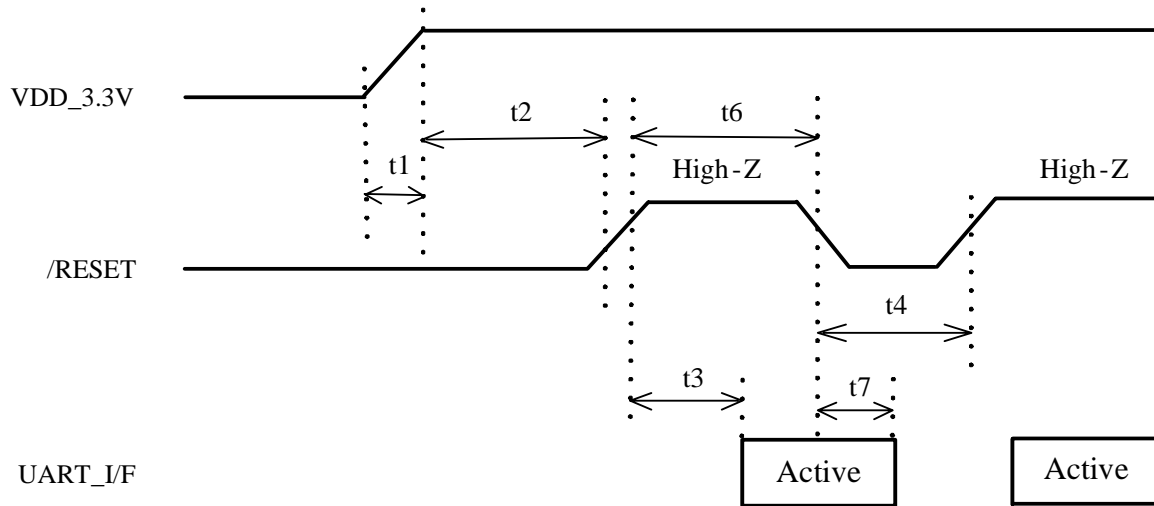

Timing Diagram for Power Up Sequence

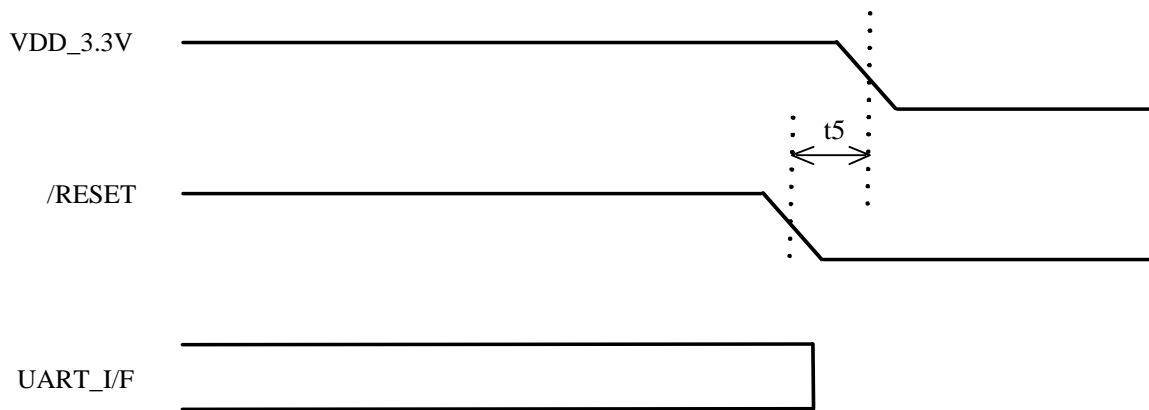

Timing Diagram for Power Down Sequence

# EYSFDCAXW

TAIYO YUDEN Confidential  
& Tentative


|                              |       |  |
|------------------------------|-------|--|
| Control No.<br>HD-AE-A051089 | (4/5) | Control name<br>Electrical characteristics |
|------------------------------|-------|--|

## AC Specifications

### UART Interface

The Specification applies for Topr.= 25 degrees C, VDD\_3.3V=3.3V

| No. | Parameter               | Condition | Symbol | Min | Typ | Max | Unit | Remark |
|-----|-------------------------|-----------|--------|-----|-----|-----|------|--------|
| 1   | RTS Low to RX Data On   |           | t1     | 0   |     |     | ms   |        |
| 2   | RTS High to RX Data Off |           | t2     |     |     | 1   | byte |        |
| 3   | CTS Low to TX Data On   |           | t3     | 0   |     |     | ms   |        |
| 4   | CTS High to TX Data Off |           | t4     |     |     | 2   | byte |        |
| 5   | CTS High Pulse Width    |           | t5     | 4   |     |     | bit  |        |

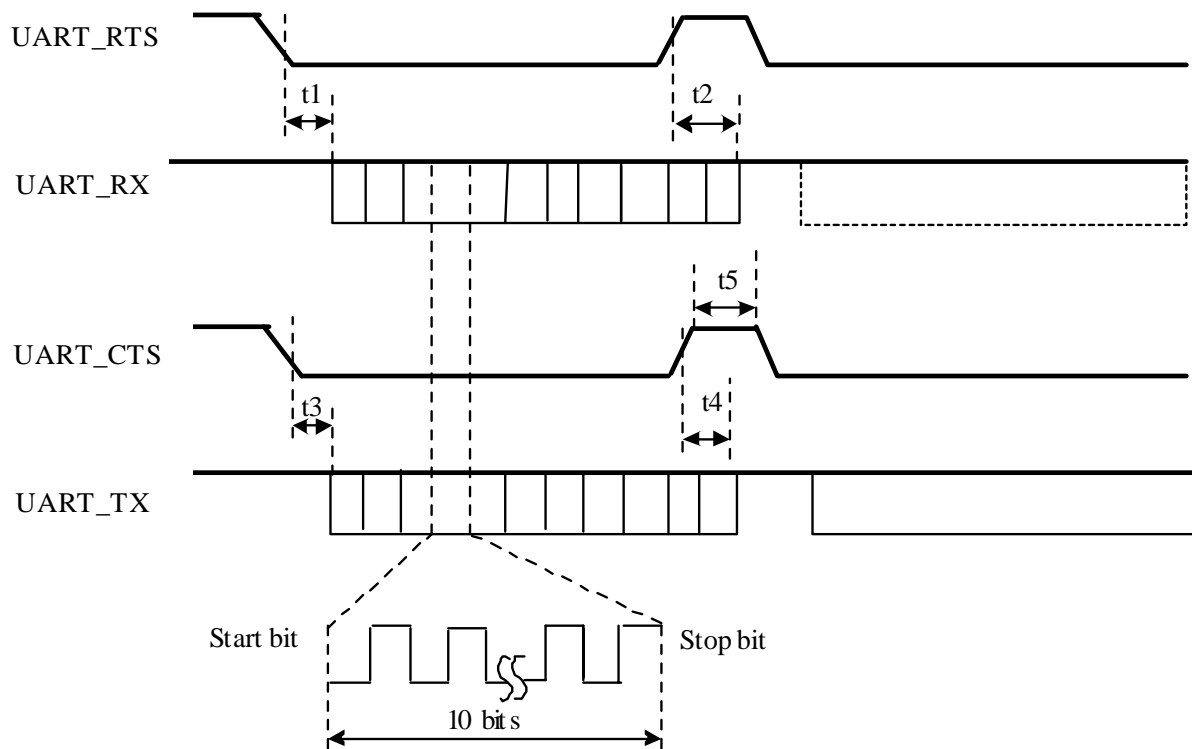

Timing Diagram for UART signals

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |       |  |
|------------------------------|-------|--|
| Control No.<br>HD-AE-A051089 | (5/5) | Control name<br>Electrical characteristics |
|------------------------------|-------|--|

## &lt;UART Parameters&gt;

| Item         | Parameter |
|--------------|-----------|
| Baud Rate    | 115.2kbps |
| Date Bits    | 8bits     |
| Stop Bits    | 1bit      |
| Parity       | None      |
| Flow Control | CTS/RTS   |

**PCM Interface****Support Schedule CODEC: MC145483 (MOTOROLA)**

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |       |  |
|------------------------------|-------|--|
| Control No.<br>HD-AE-B051089 | (1/3) | Control name<br>Electrical characteristics |
|------------------------------|-------|--|

**RF Specifications at Basic Rate**

The Specification applies for Ta=25 degrees C, VDD\_3.3V=3.3V

| No. | Parameter                    | Condition                           | Symbol | Min  | Typ | Max    | Unit  | Remark                    |
|-----|------------------------------|-------------------------------------|--------|------|-----|--------|-------|---------------------------|
| 1   | Frequency band               |                                     | FREQ   | 2400 |     | 2483.5 | MHz   |                           |
| 2   | Tx power                     |                                     | PO     | -6   | 0   | +4     | dBm   |                           |
| 3   | Modulation characteristics 1 | dF1: F0(11110000)                   | M1     | 140  |     | 175    | kHz   |                           |
| 4   | Modulation characteristics 2 | dF2: AA(10101010)                   | M4     | 115  |     |        | kHz   |                           |
| 5   | Modulation characteristics 3 | dF2/dF1                             | MC     | 0.8  |     |        |       |                           |
| 6   | In-band spurious emission 2  | 2MHz( M-N =2)                       | ISE1   |      |     | -20    | dBm   |                           |
| 7   | In-band spurious emission 3  | 3MHz or greater<br>( M-N >=3)       | ISE2   |      |     | -40    | dBm   |                           |
| 8   | Initial Carrier Frequency    |                                     | ICF    | -75  |     | +75    | kHz   |                           |
| 9   | Frequency Drift 1            | DH1                                 | FD1    | -25  |     | +25    | kHz   |                           |
| 10  | Frequency Drift 2            | DH3,DH5                             | FD2    | -40  |     | +40    | kHz   |                           |
| 11  | Drift rate                   | DH1,DH3,DH5                         | DR     |      |     | 400    | Hz/us |                           |
| 12  | C/I co-channel               |                                     | CIC    |      |     | 11     | dB    | -60dBm                    |
| 13  | C/I 1MHz                     |                                     | CI1    |      |     | 0      | dB    | -60dBm                    |
| 14  | C/I 2MHz                     |                                     | CI2    |      |     | -30    | dB    | -60dBm                    |
| 15  | C/I >= 3MHz                  |                                     | CI3    |      |     | -40    | dB    | -67dBm                    |
| 16  | C/I Image                    |                                     | CI4    |      |     | -9     | dB    | -3MHz<br>offset<br>-67dBm |
| 17  | C/I Image +/- 1MHz           |                                     | CI5    |      |     | -20    | dB    | -67dBm                    |
| 18  | Out-of-Band Blocking 1       | 30MHz to 2000MHz<br>f=2460MHz       | OBB1   |      |     | -10    | dBm   | BER<=0.1<br>%             |
| 19  | Out-of-Band Blocking 2       | 2000 to 2399MHz<br>f=2460MHz        | OBB2   |      |     | -27    | dBm   | BER<=0.1<br>%             |
| 20  | Out-of-Band Blocking 3       | 2484 to 3000MHz<br>f=2460MHz        | OBB3   |      |     | -27    | dBm   | BER<=0.1<br>%             |
| 21  | Out-of-Band Blocking 4       | 3000MHz to<br>12.75GHz<br>f=2460MHz | OBB4   |      |     | -10    | dBm   | BER<=0.1<br>%             |
| 22  | Maximum Input Level          |                                     | MAXP   | -20  |     |        | dBm   | BER<=0.1<br>%             |
| 23  | 20dB Bandwidth               |                                     | B20    |      |     | 1      | MHz   |                           |
| 24  | Sensitivity-single           | DH1                                 | SEN1   |      |     | -70    | dBm   | BER<=0.1<br>%             |
| 25  | Sensitivity-multi            | DH3,DH5                             | SEN2   |      |     | -70    | dBm   | BER<=0.1<br>%             |

# EYSFDCAXW

TAIYO YUDEN Confidential  
& Tentative

|                              |       |  |
|------------------------------|-------|--|
| Control No.<br>HD-AE-B051089 | (2/3) | Control name<br>Electrical characteristics |
|------------------------------|-------|--|

## Transmit Spectrum



**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |       |  |
|------------------------------|-------|--|
| Control No.<br>HD-AE-B051089 | (3/3) | Control name<br>Electrical characteristics |
|------------------------------|-------|--|

**RF Specifications at EDR**

The Specification applies for Ta=25 degrees C, VDD\_3.3V =3.3V

| No. | Parameter                       | Condition                   | Symbol    | Min         | Typ | Max         | Unit | Remark                    |
|-----|---------------------------------|-----------------------------|-----------|-------------|-----|-------------|------|---------------------------|
| 1   | RMS DEVM 1                      | Pai/4DQPSK                  | RDE1      |             |     | 0.20        |      |                           |
| 2   | RMS DEVM 2                      | 8DPSK                       | RDE2      |             |     | 0.13        |      |                           |
| 3   | Peak DEVM 1                     | Pai/4DQPSK                  | PDE1      |             |     | 0.35        |      |                           |
| 4   | Peak DEVM 2                     | 8DPSK                       | PDE2      |             |     | 0.25        |      |                           |
| 5   | 99% DEVM 1                      | Pai/4DQPSK                  | D991      |             |     | 0.30        |      |                           |
| 6   | 99% DEVM 2                      | 8DPSK                       | D992      |             |     | 0.20        |      |                           |
| 7   | EDR In-band spurious emission 1 | M-N =1                      | EISE1     | 26          |     |             | dB   |                           |
| 8   | EDR In-band spurious emission 2 | M-N =2                      | EISE2     |             |     | -20         | dBm  |                           |
| 9   | EDR In-band spurious emission 3 | M-N =3                      | EISE3     |             |     | -40         | dBm  |                           |
| 10  | EDR Initial Carrier Frequency   |                             | EICF      | -75         |     | +75         | kHz  |                           |
| 11  | EDR Drift                       |                             | ED        | -10         |     | +10         | kHz  |                           |
| 12  | Relative transmit power         | PDPSK                       | RTP       | PGFSK<br>-4 |     | PGFSK<br>+1 | dB   |                           |
| 13  | Actual Sensitivity Level        | 2-DH5(3-DH5)<br>16000000bit | ESEN      |             |     | -70         | dBm  | BER= 10 <sup>-4</sup>     |
| 14  | BER Floor Performance           | 2-DH5(3-DH5)<br>16000000bit | FSEN      |             |     | -60         | dBm  | BER= 10 <sup>-5</sup>     |
| 15  | C/I co-channel                  | 2-DH5                       | 2CIC      |             |     | 13          | dB   | -60dBm                    |
| 16  | C/I 1MHz                        | 2-DH5                       | 2CI1      |             |     | 0           | dB   | -60dBm                    |
| 17  | C/I 2MHz                        | 2-DH5                       | 2CI2      |             |     | -30         | dB   | -60dBm                    |
| 18  | C/I >= 3MHz                     | 2-DH5                       | 2CI3      |             |     | -40         | dB   | -67dBm                    |
| 19  | C/I Image                       | 2-DH5                       | 2CI4      |             |     | -7          | dB   | -67dBm<br>-3MHz<br>offset |
| 20  | C/I Image +/- 1MHz              | 2-DH5                       | 2CI5      |             |     | -20         | dB   | -67dBm                    |
| 21  | C/I co-channel                  | 3-DH5                       | 3CIC      |             |     | 21          | dB   | -60dBm                    |
| 22  | C/I 1MHz                        | 3-DH5                       | 3CI1      |             |     | 5           | dB   | -60dBm                    |
| 23  | C/I 2MHz                        | 3-DH5                       | 3CI2      |             |     | -25         | dB   | -60dBm                    |
| 24  | C/I >= 3MHz                     | 3-DH5                       | 3CI3      |             |     | -33         | dB   | -67dBm                    |
| 25  | C/I Image                       | 3-DH5                       | 3CI4      |             |     | 0           | dB   | -67dBm<br>-3MHz<br>offset |
| 26  | C/I Image +/- 1MHz              | 3-DH5                       | 3CI5      |             |     | -13         | dB   | -67dBm                    |
| 27  | Maximum Input Level             | 2-DH5(3-DH5)                | EMAX<br>P | -20         |     |             | dBm  |                           |

Note:

**Bluetooth**® standard Ver 2.0+EDR conformity

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                                     |  |
|-------------------------------------|--|
| Control No.<br>HD-AE-C051089 (1/13) | Control name<br>Electrical characteristics |
|-------------------------------------|--|

Supported HCI Commands / HCI Events

The **Bluetooth**® functions of this module is as written in the attached PICS. Depending on firmware version Upgrade, the **Bluetooth**® functions are subject to change without notice.

**HCI COMMAND LIST**

Firmware Version19.2 (Build1915)

| Command Description | OpCode | Group (Hex) | Command (Hex) | Parameters | Returns | Status | Notes |
|---------------------|--------|-------------|---------------|------------|---------|--------|-------|
|---------------------|--------|-------------|---------------|------------|---------|--------|-------|

**LINK CONTROL****Inquiry**

|                                |        |   |   |                   |        |     |  |
|--------------------------------|--------|---|---|-------------------|--------|-----|--|
| HCI_Inquiry                    | 0x0401 | 1 | 1 | LAP               |        | Yes |  |
|                                |        |   |   | Inquiry Length    |        |     |  |
|                                |        |   |   | Num Responses     |        |     |  |
| HCI_Inquiry_Cancel             | 0x0402 | 1 | 2 |                   | Status | Yes |  |
| HCI_Periodic_Inquiry_Mode      | 0x0403 | 1 | 3 | Max Period Length | Status | Yes |  |
|                                |        |   |   | Min Period Length |        |     |  |
|                                |        |   |   | LAP               |        |     |  |
|                                |        |   |   | Inquiry Length    |        |     |  |
| HCI_Exit_Periodic_Inquiry_Mode | 0x0404 | 1 | 4 |                   | Status | Yes |  |

**Connection Management**

|   |        |   |    |                           |                   |     |               |
|---|--------|---|----|---------------------------|-------------------|-----|---------------|
| HCI_Create_Connection                     | 0x0405 | 1 | 5  | BD ADDR                   |                   | Yes | a,b           |
|   |        |   |    | Packet Type               |                   |     |               |
|   |        |   |    | Page Scan Repetition Mode |                   |     |               |
|   |        |   |    | Page Scan Mode            |                   |     |               |
|   |        |   |    | Clock Offset              |                   |     |               |
|   |        |   |    | Allow Role Switch         |                   |     |               |
| HCI_Disconnect                            | 0x0406 | 1 | 6  | Connection Handle         |                   | Yes | b             |
| HCI_Add_SCO_Connection                    | 0x0407 | 1 | 7  | SCO Handle                |                   | Yes | b,c,<br>d,j,p |
|   |        |   |    | Packet Type               |                   |     |               |
| HCI_Create_Connection_Cancel              | 0x0408 | 1 | 8  | BD ADDR                   | Status<br>BD_ADDR | Yes | l             |
| HCI_Accept_Connection_Request             | 0x0409 | 1 | 9  | BD ADDR                   |                   | Yes |               |
| HCI_Reject_Connection_Request             | 0x040A | 1 | A  | BD ADDR                   |                   | Yes |               |
| HCI_Change_Connection_Packet_Type         | 0x040F | 1 | F  | Connection Handle         |                   | Yes |               |
|   |        |   |    | Packet Type               |                   |     |               |
| HCI_Setup_Synchronous_Connection          | 0x0428 | 1 | 28 | Connection_Handle         |                   | Yes | l,m,<br>o,p   |
|   |        |   |    | Transmit_Bandwidth        |                   |     |               |
|   |        |   |    | Receive_Bandwidth         |                   |     |               |
|   |        |   |    | Max_Latency               |                   |     |               |
|   |        |   |    | Voice_Setting             |                   |     |               |
|   |        |   |    | Retransmission_Effort     |                   |     |               |
| HCI_Accept_Synchronous_Connection_Request | 0x0429 | 1 | 29 | BD ADDR                   |                   | Yes | l,m,o         |
|   |        |   |    | Transmit_Bandwidth        |                   |     |               |
|   |        |   |    | Receive_Bandwidth         |                   |     |               |
|   |        |   |    | Max_Latency               |                   |     |               |
|   |        |   |    | Content Format            |                   |     |               |
|   |        |   |    | Retransmission_Effort     |                   |     |               |
| HCI_Reject_Synchronous_Connection_Request | 0x042A | 1 | 2A | BD ADDR                   |                   | Yes | l,m,o         |
|   |        |   |    | Reason                    |                   |     |               |

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |        |  |
|------------------------------|--------|--|
| Control No.<br>HD-AE-C051089 | (2/13) | Control name<br>Electrical characteristics |
|------------------------------|--------|--|

**Authentication / Pairing**

|                                     |        |   |    |                   |         |     |  |
|-------------------------------------|--------|---|----|-------------------|---------|-----|--|
| HCI_Link_Key_Request_Reply          | 0x040B | 1 | B  | BD_ADDR           | Status  | Yes |  |
|                                     |        |   |    | Link Key          | BD_ADDR |     |  |
| HCI_Link_Key_Request_Negative_Reply | 0x040C | 1 | C  | BD_ADDR           | Status  | Yes |  |
|                                     |        |   |    |                   | BD_ADDR |     |  |
| HCI_PIN_Code_Request_Reply          | 0x040D | 1 | D  | BD_ADDR           | Status  | Yes |  |
|                                     |        |   |    | PIN Code Length   | BD_ADDR |     |  |
|                                     |        |   |    | PIN Code          |         |     |  |
| HCI_PIN_Code_Request_Negative_Reply | 0x040E | 1 | E  | BD_ADDR           | Status  | Yes |  |
|                                     |        |   |    |                   | BD_ADDR |     |  |
| HCI_Authentication_Requested        | 0x0411 | 1 | 11 | Connection Handle |         | Yes |  |
| HCI_Change_Connection_Link_Key      | 0x0415 | 1 | 15 | Connection Handle |         | Yes |  |

**Encryption**

|                               |        |   |    |                   |  |     |  |
|-------------------------------|--------|---|----|-------------------|--|-----|--|
| HCI_Set_Connection_Encryption | 0x0413 | 1 | 13 | Connection Handle |  | Yes |  |
|                               |        |   |    | Encryption Enable |  |     |  |
| HCI_Master_Link_Key           | 0x0417 | 1 | 17 | Key Flag          |  | Yes |  |

**Remote Information**

|                                     |        |   |    |                           |                   |     |   |
|-------------------------------------|--------|---|----|---------------------------|-------------------|-----|---|
| HCI_Remote_Name_Request             | 0x0419 | 1 | 19 | BD_ADDR                   |                   | Yes |   |
|                                     |        |   |    | Page Scan Repetition Mode |                   |     |   |
|                                     |        |   |    | Page Scan Mode            |                   |     |   |
|                                     |        |   |    | Clock Offset              |                   |     |   |
| HCI_Remote_Name_Request_Cancel      | 0x041A | 1 | 1A | BD_ADDR                   | Status            | Yes | 1 |
|                                     |        |   |    | BD_ADDR                   |                   |     |   |
| HCI_Read_Remote_Supported_Features  | 0x041B | 1 | 1B | Connection Handle         |                   | Yes |   |
| HCI_Read_Remote_Extended_Features   | 0x041C | 1 | 1C | Connection Handle         |                   | Yes | 1 |
|                                     |        |   |    | Page Number               |                   |     |   |
| HCI_Read_Remote_Version_Information | 0x041D | 1 | 1D | Connection Handle         |                   | Yes |   |
| HCI_Read_Clock_Offset               | 0x041F | 1 | 1F | Connection Handle         |                   | Yes |   |
| HCI_Read_LMP_Handle                 | 0x0420 | 1 | 20 | Connection Handle         | Status            | Yes | 1 |
|                                     |        |   |    |                           | Connection Handle |     |   |
|                                     |        |   |    |                           | LMP_Handle        |     |   |
|                                     |        |   |    |                           | Reserved          |     |   |



**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |        |  |
|------------------------------|--------|--|
| Control No.<br>HD-AE-C051089 | (3/13) | Control name<br>Electrical characteristics |
|------------------------------|--------|--|

**LINK POLICY**

|  |        |   |    |                              |                              |     |     |
|--|--------|---|----|------------------------------|------------------------------|-----|-----|
| HCI_Hold_Mode                          | 0x0801 | 2 | 1  | Connection Handle            |                              | Yes |     |
|  |        |   |    | Hold Mode Max Interval       |                              |     |     |
|  |        |   |    | Hold Mode Min Interval       |                              |     |     |
| HCI_Sniff_Mode                         | 0x0803 | 2 | 3  | Connection Handle            |                              | Yes |     |
|  |        |   |    | Sniff Mode Max Interval      |                              |     |     |
|  |        |   |    | Sniff Mode Min Interval      |                              |     |     |
|  |        |   |    | Sniff Attempt                |                              |     |     |
|  |        |   |    | Sniff Timeout                |                              |     |     |
| HCI_Exit_Sniff_Mode                    | 0x0804 | 2 | 4  | Connection Handle            |                              | Yes |     |
| HCI_Park_State                         | 0x0805 | 2 | 5  | Connection Handle            |                              | Yes | k   |
|  |        |   |    | Beacon Max Interval          |                              |     |     |
|  |        |   |    | Beacon Min Interval          |                              |     |     |
| HCI_Exit_Park_State                    | 0x0806 | 2 | 6  | Connection Handle            |                              | Yes | k   |
| HIC_QoS_Setup                          | 0x0807 | 2 | 7  | Connection Handle            |                              | Yes | e,m |
|  |        |   |    | Flags                        |                              |     |     |
|  |        |   |    | Service Type                 |                              |     |     |
|  |        |   |    | Token Rate                   |                              |     |     |
|  |        |   |    | Peak Bandwidth               |                              |     |     |
|  |        |   |    | Latency                      |                              |     |     |
| Delay Variation                        |        |   |    |                              |                              |     |     |
| HCI_Role_Discovery                     | 0x0809 | 2 | 9  | Connection Handle            | Status                       | Yes |     |
|  |        |   |    |                              | Connection Handle            |     |     |
|  |        |   |    |                              | Current Role                 |     |     |
| HCI_Switch_Role                        | 0x080B | 2 | B  | BD ADDR                      |                              | Yes |     |
|  |        |   |    | Role                         |                              |     |     |
| HCI_Read_Link_Policy_Settings          | 0x080C | 2 | C  | Connection Handle            | States                       | Yes |     |
|  |        |   |    |                              | Connection Handle            |     |     |
|  |        |   |    |                              | Link Policy Settings         |     |     |
| HCI_Write_Link_Policy_Settings         | 0x080D | 2 | D  | Connection Handle            | States                       | Yes |     |
|  |        |   |    |                              | Connection Handle            |     |     |
|  |        |   |    |                              | Link Policy settings         |     |     |
| HCI_Read_Default_Link_Policy_Settings  | 0x080E | 2 | E  |                              | Status                       | Yes | l   |
|  |        |   |    |                              | Default Link Policy Settings |     |     |
| HCI_Write_Default_Link_Policy_Settings | 0x080F | 2 | F  | Default Link Policy Settings | Status                       | Yes | l   |
| HCI_Flow_Specification                 | 0x0810 | 2 | 10 | Connection Handle            |                              | No  | l,m |
|  |        |   |    | Flags                        |                              |     |     |
|  |        |   |    | Flow direction               |                              |     |     |
|  |        |   |    | Service Type                 |                              |     |     |
|  |        |   |    | Token Rate                   |                              |     |     |
|  |        |   |    | Token Bucket Size            |                              |     |     |
|  |        |   |    | Peak Bandwidth               |                              |     |     |
|  |        |   |    | Access Latency               |                              |     |     |

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |        |  |
|------------------------------|--------|--|
| Control No.<br>HD-AE-C051089 | (4/13) | Control name<br>Electrical characteristics |
|------------------------------|--------|--|

**HIST CONTROLLER & BASEBAND**

|                                     |        |   |    |                       |                       |     |       |
|-------------------------------------|--------|---|----|-----------------------|-----------------------|-----|-------|
| HCI_Set_Event_Mask                  | 0x0C01 | 3 | 1  | Event Mask            | States                | Yes |       |
| HCI_Reset                           | 0x0C03 | 3 | 3  |                       | States                | Yes |       |
| HCI_Set_Event_Filter                | 0x0C05 | 3 | 5  | Filter Type           | States                | Yes |       |
|                                     |        |   |    | Filter Condition Type |                       |     |       |
|                                     |        |   |    | Condition             |                       |     |       |
| HCI_Flush                           | 0x0C08 | 3 | 8  | Connection Handle     | States                | Yes |       |
|                                     |        |   |    |                       | Connection Handle     |     |       |
| HCI_Read_PIN_Type                   | 0x0C09 | 3 | 9  |                       | States                | Yes |       |
| HCI_Write_PIN_Type                  | 0x0C0A | 3 | A  | PIN Type              | PIN Type              | Yes |       |
| HCI_Create_New_Unit_Key             | 0x0C0B | 3 | B  |                       | States                | Yes |       |
| HCI_Read_Stored_Link_Key            | 0x0C0D | 3 | D  | BD ADDR               | States                | Yes |       |
|                                     |        |   |    | Read All Flag         | Max Num Keys          |     |       |
|                                     |        |   |    |                       | Num Keys Read         |     |       |
| HCI_Write_Stored_Link_Key           | 0x0C11 | 3 | 11 | Num Keys To Write     | States                | Yes | n     |
|                                     |        |   |    | BD ADDR [I]           | Num Keys Written      |     |       |
|                                     |        |   |    | Link Key [I]          |                       |     |       |
| HCI_Delete_Stored_Link_Key          | 0x0C12 | 3 | 12 | BD ADDR               | States                | Yes | n     |
|                                     |        |   |    | Delete All Flag       | Num Keys Deleted      |     |       |
| HCI_Write_Local_Name                | 0x0C13 | 3 | 13 | Local Name            | States                | Yes | f,k,n |
| HCI_Read_Local_Name                 | 0x0C14 | 3 | 14 |                       | States                | Yes |       |
|                                     |        |   |    |                       | Local Name            |     |       |
| HCI_Read_Connection_Accept_Timeout  | 0x0C15 | 3 | 15 |                       | States                | Yes |       |
|                                     |        |   |    |                       | Conn Accept Timeout   |     |       |
| HCI_Write_Connection_Accept_Timeout | 0x0C16 | 3 | 16 | Conn Accept Timeout   | States                | Yes |       |
| HCI_Read_Page_Timeout               | 0x0C17 | 3 | 17 |                       | States                | Yes |       |
|                                     |        |   |    |                       | Page Timeout          |     |       |
| HCI_Write_Page_Timeout              | 0x0C18 | 3 | 18 | Page Timeout          | States                | Yes |       |
| HCI_Read_Scan_Enable                | 0x0C19 | 3 | 19 |                       | States                | Yes |       |
|                                     |        |   |    |                       | Scan Enable           |     |       |
| HCI_Write_Scan_Enable               | 0x0C1A | 3 | 1A | Scan Enable           | States                | Yes |       |
| HCI_Read_Page_Scan_Activity         | 0x0C1B | 3 | 1B |                       | States                | Yes |       |
|                                     |        |   |    |                       | Page Scan Interval    |     |       |
|                                     |        |   |    |                       | Page Scan Window      |     |       |
| HCI_Write_Page_Scan_Activity        | 0x0C1C | 3 | 1C | Page Scan Interval    | States                | Yes |       |
|                                     |        |   |    | Page Scan Window      |                       |     |       |
| HCI_Read_Inquiry_Scan_Activity      | 0x0C1D | 3 | 1D |                       | States                | Yes |       |
|                                     |        |   |    |                       | Inquiry Scan Interval |     |       |
|                                     |        |   |    |                       | Inquiry Scan Window   |     |       |
| HCI_Write_Inquiry_Scan_Activity     | 0x0C1E | 3 | 1E | Inquiry Scan Interval | States                | Yes |       |
|                                     |        |   |    | Inquiry Scan Window   |                       |     |       |
| HCI_Read_Authentication_Enable      | 0x0C1F | 3 | 1F |                       | States                | Yes |       |
|                                     |        |   |    |                       | Authentication Enable |     |       |
| HCI_Write_Authentication_Enable     | 0x0C20 | 3 | 20 | Authentication Enable | States                | Yes |       |
| HCI_Read_Encryption_Mode            | 0x0C21 | 3 | 21 |                       | States                | Yes |       |
|                                     |        |   |    |                       | Encryption Mode       |     |       |
| HCI_Write_Encryption_Mode           | 0x0C22 | 3 | 22 | Encryption Mode       | States                | Yes |       |
| HCI_Read_Class_of_Device            | 0x0C23 | 3 | 23 |                       | States                | Yes |       |
|                                     |        |   |    |                       | Class of Device       |     |       |
| HCI_Write_Class_of_Device           | 0x0C24 | 3 | 24 | Class of Device       | States                | Yes |       |
| HCI_Read_Voice_Setting              | 0x0C25 | 3 | 25 |                       | States                | Yes |       |
|                                     |        |   |    |                       | Voice Setting         |     |       |
| HCI_Write_Voice_Setting             | 0x0C26 | 3 | 26 | Voice Channel setting | States                | Yes |       |

# EYSFDCAXW

TAIYO YUDEN Confidential  
& Tentative

|                              |        |  |
|------------------------------|--------|--|
| Control No.<br>HD-AE-C051089 | (5/13) | Control name<br>Electrical characteristics |
|------------------------------|--------|--|

|   |        |   |    |                                   |                          |     |       |
|---|--------|---|----|-----------------------------------|--------------------------|-----|-------|
| HCI_Read_Automatic_Flush_Timeout          | 0x0C27 | 3 | 27 | Connection Handle                 | States                   | Yes |       |
|   |        |   |    |                                   | Connection Handle        |     |       |
|   |        |   |    |                                   | Flush Timeout            |     |       |
| HCI_Write_Automatic_Flush_Timeout         | 0x0C28 | 3 | 28 | Connection Handle                 | States                   | Yes |       |
|   |        |   |    | Flash Timeout                     | Connection Handle        |     |       |
| HCI_Read_Num_Broadcast_Retransmission     | 0x0C29 | 3 | 29 |                                   | States                   | Yes |       |
| HCI_Write_Num_Broadcast_Retransmission    | 0x0C2A | 3 | 2A | Num Broadcast Retransmission      | States                   | Yes |       |
| HCI_Read_Hold_Mode_Activity               | 0x0C2B | 3 | 2B |                                   | States                   | Yes |       |
|   |        |   |    |                                   | Hold Mode Activity       |     |       |
| HCI_Write_Hold_Mode_Activity              | 0x0C2C | 3 | 2C | Hold Mode Activity                | States                   | Yes |       |
| HCI_Read_Transmit_Power_Level             | 0x0C2D | 3 | 2D | Connection Handle                 | States                   | Yes |       |
|   |        |   |    | Type                              | Connection Handle        |     |       |
|   |        |   |    |                                   | Power Level              |     |       |
| HCI_Read_Synchronous_Flow_Control_Enable  | 0x0C2E | 3 | 2E |                                   | States                   | No  | c,d,k |
| HCI_Write_Synchronous_Flow_Control_Enable | 0x0C2F | 3 | 2F | Synchronous Flow Control Enable   | States                   | No  | c,d,k |
| HCI_Set_Controller_To_Host_Flow_Control   | 0x0C31 | 3 | 31 | Flow Control Enable               | States                   | Yes | k     |
| HCI_Host_Buffer_Size                      | 0x0C33 | 3 | 33 | Host ACL Data Packet Length       | States                   | Yes |       |
|   |        |   |    | Host SCO Data Packet Length       |                          |     |       |
|   |        |   |    | Host Total Num ACL Data Packets   |                          |     |       |
|   |        |   |    | Host Total Num SCO Data Packets   |                          |     |       |
| HCI_Host_Number_Of_Completed_Packets      | 0x0C35 | 3 | 35 | Number of Handles                 |                          | Yes |       |
|   |        |   |    | Connection handle [I]             |                          |     |       |
|   |        |   |    | Host Num of Completed Packets [I] |                          |     |       |
| HCI_Read_Link_Supervision_Timeout         | 0x0C36 | 3 | 36 | Connection Handle                 | States                   | Yes |       |
|   |        |   |    |                                   | Connection Handle        |     |       |
|   |        |   |    |                                   | Link Supervision Timeout |     |       |
| HCI_Write_Link_Supervision_Timeout        | 0x0C37 | 3 | 37 | Connection Handle                 | States                   | Yes |       |
|   |        |   |    | Link Supervision Timeout          | Connection Handle        |     |       |
| HCI_Read_Number_Of_Support_IAC            | 0x0C38 | 3 | 38 |                                   | States                   | Yes |       |
| HCI_Read_Current_IAC_LAP                  | 0x0C39 | 3 | 39 |                                   | States                   | Yes |       |
|   |        |   |    |                                   | Num Current IAC          |     |       |
|   |        |   |    |                                   | IAC LAP [I]              |     |       |
| HCI_Write_Current_IAC_LAP                 | 0x0C3A | 3 | 3A | Num Current IAC                   | States                   | Yes |       |
|   |        |   |    | IAC LAP [I]                       |                          |     |       |
| HCI_Read_Page_Scan_Period_Mode            | 0x0C3B | 3 | 3B |                                   | States                   | Yes |       |
| HCI_Write_Page_Scan_Period_Mode           | 0x0C3C | 3 | 3C | Page Scan Period Mode             | States                   | Yes |       |
|   |        |   |    |                                   | Page Scan Period Mode    |     |       |
| HCI_Read_Page_Scan_Mode                   | 0x0C3D | 3 | 3D |                                   | States                   | Yes | j     |
|   |        |   |    |                                   | Page Scan Mode           |     |       |
| HCI_Write_Page_Scan_Mode                  | 0x0C3E | 3 | 3E | Page Scan Mode                    | States                   | Yes | h,j   |
| HCI_Set_AFH_Host_Channel_Classification   | 0x0C3F | 3 | 3F | AH Host Channel Classification    | Status                   | Yes | l     |

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |        |  |
|------------------------------|--------|--|
| Control No.<br>HD-AE-C051089 | (6/13) | Control name<br>Electrical characteristics |
|------------------------------|--------|--|

|                                       |        |   |    |                             |                             |     |   |
|---------------------------------------|--------|---|----|-----------------------------|-----------------------------|-----|---|
| HCI_Read_Inquiry_Scan_Type            | 0x0C42 | 3 | 42 |                             | Status                      | Yes | 1 |
|                                       |        |   |    |                             | Inquiry Scan Type           |     |   |
| HCI_Write_Inquiry_Scan_Type           | 0x0C43 | 3 | 43 | Inquiry Scan Type           | Status                      | Yes | 1 |
|                                       |        |   |    |                             | Status                      |     |   |
| HCI_Read_Inquiry_Mode                 | 0x0C44 | 3 | 44 |                             | Inquiry Mode                | Yes | 1 |
|                                       |        |   |    |                             | Status                      |     |   |
| HCI_Write_Inquiry_Mode                | 0x0C45 | 3 | 45 | Inquiry Mode                | Status                      | Yes | 1 |
|                                       |        |   |    |                             | Status                      |     |   |
| HCI_Read_Page_Scan_Type               | 0x0C46 | 3 | 46 |                             | Page Scan Type              | Yes | 1 |
|                                       |        |   |    |                             | Status                      |     |   |
| HCI_Write_Page_Scan_Type              | 0x0C47 | 3 | 47 | Page Scan Type              | Status                      | Yes | 1 |
|                                       |        |   |    |                             | Status                      |     |   |
| HCI_Read_AFH_Channel_Assessment_Mode  | 0x0C48 | 3 | 48 |                             | AFH Channel Assessment Mode | Yes | 1 |
|                                       |        |   |    |                             | Status                      |     |   |
| HCI_Write_AFH_Channel_Assessment_Mode | 0x0C49 | 3 | 49 | AFH Channel Assessment Mode | Status                      | Yes | 1 |

**INFORMATIONAL PARAMETERS**

|                                    |        |   |   |             |                                     |     |   |
|------------------------------------|--------|---|---|-------------|-------------------------------------|-----|---|
| HCI_Read_Local_Version_Information | 0x1001 | 4 | 1 |             | Status                              | Yes |   |
|                                    |        |   |   |             | HCI Version                         |     |   |
|                                    |        |   |   |             | HCI Revision                        |     |   |
|                                    |        |   |   |             | LMP Version                         |     |   |
|                                    |        |   |   |             | Manufacturer Name                   |     |   |
| LMP Subversion                     |        |   |   |             |                                     |     |   |
| HCI_Read_Local_Supported_Commands  | 0x1002 | 4 | 2 |             | Status                              | Yes | 1 |
|                                    |        |   |   |             | Supported Commands                  |     |   |
| HCI_Read_Local_Supported_Features  | 0x1003 | 4 | 3 |             | Status                              | Yes |   |
|                                    |        |   |   |             | LMP_Features                        |     |   |
| HCI_Read_Local_Extended_Features   | 0x1004 | 4 | 4 | Page number | Status                              | Yes | 1 |
|                                    |        |   |   |             | Page number                         |     |   |
|                                    |        |   |   |             | Maximum Page Number                 |     |   |
|                                    |        |   |   |             | Extended LMP Features               |     |   |
| HCI_Read_Buffer_Size               | 0x1005 | 4 | 5 |             | Status                              | Yes |   |
|                                    |        |   |   |             | HC ACL Data Packet Length           |     |   |
|                                    |        |   |   |             | HC Synchronous Data Packet Length   |     |   |
|                                    |        |   |   |             | HC Total Num ACL Data Packet        |     |   |
|                                    |        |   |   |             | HC Total Num Synchronous Data Packe |     |   |
| HCI_Read_Country_Code              | 0x1007 | 4 | 7 |             | Status                              | Yes | j |
|                                    |        |   |   |             | Country Code                        |     |   |
| HCI_Read_BD_ADDR                   | 0x1009 | 4 | 9 |             | Status                              | Yes |   |
|                                    |        |   |   |             | BD ADDR                             |     |   |

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |        |  |
|------------------------------|--------|--|
| Control No.<br>HD-AE-C051089 | (7/13) | Control name<br>Electrical characteristics |
|------------------------------|--------|--|

**STAUS PARAMETERS**

|                                  |        |   |   |                   |                        |     |   |
|----------------------------------|--------|---|---|-------------------|------------------------|-----|---|
| HCI_Read_Failed_Contact_Counter  | 0x1401 | 5 | 1 | Connection Handle | Status                 | Yes |   |
|                                  |        |   |   |                   | Connection handle      |     |   |
|                                  |        |   |   |                   | Failed Contact Counter |     |   |
| HCI_Reset_Failed_Contact_Counter | 0x1402 | 5 | 2 | Connection Handle | Status                 | Yes |   |
|                                  |        |   |   |                   | Connection handle      |     |   |
| HCI_Read_Link_Quality            | 0x1403 | 5 | 3 | Connection Handle | Status                 | Yes | k |
|                                  |        |   |   |                   | Connection Handle      |     |   |
|                                  |        |   |   |                   | Link Quality           |     |   |
| HCI_Read_RSSI                    | 0x1405 | 5 | 5 | Connection Handle | Status                 | Yes |   |
|                                  |        |   |   |                   | Connection Handle      |     |   |
|                                  |        |   |   |                   | RSSI                   |     |   |
| HCI_Read_AFH_Channel_Map         | 0x1406 | 5 | 6 | Connection Handle | Status                 | Yes | 1 |
|                                  |        |   |   |                   | Connection Handle      |     |   |
|                                  |        |   |   |                   | AFH Mode               |     |   |
| HCI_Read_Clock                   | 0x1407 | 5 | 7 | Which Clock       | Status                 | Yes | 1 |
|                                  |        |   |   | Connection Handle | Connection Handle      |     |   |
|                                  |        |   |   |                   | AFH Mode               |     |   |
|                                  |        |   |   |                   | AFH Channel Map        |     |   |

**TESTING**

|                                   |        |   |   |               |               |     |     |
|-----------------------------------|--------|---|---|---------------|---------------|-----|-----|
| HCI_Read_Loopback_Mode            | 0x1801 | 6 | 1 |               | States        | Yes |     |
|                                   |        |   |   |               | Loopback Mode |     |     |
| HCI_Write_Loopback_Mode           | 0x1802 | 6 | 2 | Loopback Mode | States        | Yes | g,i |
| HCI_Enable_Device_Under_Test_Mode | 0x1803 | 6 | 3 |               | States        | Yes |     |

**EYSFDCAWX**TAIYO YUDEN Confidential  
& Tentative

|                              |        |  |
|------------------------------|--------|--|
| Control No.<br>HD-AE-C051089 | (8/13) | Control name<br>Electrical characteristics |
|------------------------------|--------|--|

## Notes:

- a) Up to seven connections: a slave of up to two masters, and/or a master of up to seven slave.  
Some operations restricted or non-functional in a scatternet.
- b) Chip resource limits constrain the rate at which ACL and SCO connections can be made and broken to approximately  
20 per 15 seconds. The time limit can be configured.
- c) Up to three SCO links. Each SCO link can be routed over the chip's PCM interface or over HCI/BCSP.  
Preliminary Support for SCO over USB or H4 is in place, but testing has been light.
- d) No HCI SCO Host Controller to Host flow control support.  
No HCI SCO Host to Host Controller flow control support.
- e) Limited support for "best effort" and "guaranteed" Qos only.
- f) Initial device name taken from PS Keys, and so is maintained through a reset/reboot.
- g) HCI Reset does not work if the device is in local loopback mode.
- h) Optional Paging schemes not supported.
- i) Remote ACL loopback sometimes deadlocks when the device's flow control mechanisms assert to each other.
- j) Bluetooth v1.1 specification command, deprecated in the v1.2 specification; support retained for backwards compatibility.
- k) Bluetooth v1.1 specification command, renamed in the v1.2 specification.  
Park Mode ---> Park State  
Exit Park Mode ---> Exit Park State  
Set Host Controller To Host Flow Control ---> Set Controller To Host Flow Control  
Change Local Name ---> Write Local Name  
Read SCO Flow Control Enable ---> Read Synchronous Flow Control Enable  
Write SCO Flow Control Enable ---> Write Synchronous Flow Control Enable  
Get Link Quality ---> Read Link Quality
- l) Command not in the Bluetooth v1.1 specification.
- m) Underlying Flow\_Specification functionality the same as for QoS\_Setup.
- n) Command which rewrites FROM in module
- o) CVSD not available with 3EV3 or 3EV5 EDR packets.
- p) HCI Setup Synchronous Connection command does not support HV1,HV2 and HV3 Packet Type. If you want to use those Packet Types,please use HCI Add SCO connection command.

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |        |  |
|------------------------------|--------|--|
| Control No.<br>HD-AE-C051089 | (9/13) | Control name<br>Electrical characteristics |
|------------------------------|--------|--|

***HCI EVENT LIST***

| Event Description | OpCode | Parameters | Status | Notes |
|-------------------|--------|------------|--------|-------|
|-------------------|--------|------------|--------|-------|

***Inquiry***

|                             |      |                               |     |   |
|-----------------------------|------|-------------------------------|-----|---|
| Inquiry _Complete           | 0x01 | Status                        | Yes |   |
| Inquiry _Result             | 0x02 | Num Responses                 | Yes |   |
|                             |      | BD ADDR [I]                   |     |   |
|                             |      | Page Scan Repetition Mode [I] |     |   |
|                             |      | Page Scan Period Mode [I]     |     |   |
|                             |      | Page Scan Mode [I]            |     |   |
|                             |      | Class of Device [I]           |     |   |
| Inquiry _Result _with _RSSI | 0x22 | Clock Offset [I]              | Yes | b |
|                             |      | Num Responses                 |     |   |
|                             |      | BD ADDR [I]                   |     |   |
|                             |      | Page Scan Repetition Mode [I] |     |   |
|                             |      | Page Scan Period Mode [I]     |     |   |
|                             |      | Page Scan Mode [I]            |     |   |
|                             |      | Class of Device [I]           |     |   |
| Clock Offset [I]            |      |                               |     |   |
|                             |      | RSSI [I]                      |     |   |

***Connection Management***

|                                   |      |                       |     |   |
|-----------------------------------|------|-----------------------|-----|---|
| Connection _Complete              | 0x03 | Status                | Yes |   |
|                                   |      | Connection Handle     |     |   |
|                                   |      | BD ADDR               |     |   |
|                                   |      | Link Type             |     |   |
| Connection _Request               | 0x04 | Encryption Mode       | Yes |   |
|                                   |      | BD ADDR               |     |   |
|                                   |      | Class of Device       |     |   |
| Disconnection _Complete           | 0x05 | Link Type             | Yes |   |
|                                   |      | Reason                |     |   |
| Synchronous _Connection _Complete | 0x2C | Status                | Yes | b |
|                                   |      | Connection Handle     |     |   |
|                                   |      | BD ADDR               |     |   |
|                                   |      | Link Type             |     |   |
|                                   |      | Transmission Interval |     |   |
|                                   |      | Retransmission Window |     |   |
|                                   |      | Rx Packet Length      |     |   |
|                                   |      | Tx Packet Length      |     |   |
| Air Mode                          |      |                       |     |   |
| Synchronous _Connection _Changed  | 0x2D | Status                | Yes | b |
|                                   |      | Connection Handle     |     |   |
|                                   |      | Transmission Interval |     |   |
|                                   |      | Retransmission Window |     |   |
|                                   |      | Rx Packet Length      |     |   |
|                                   |      | Tx Packet Length      |     |   |

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |         |  |
|------------------------------|---------|--|
| Control No.<br>HD-AE-C051089 | (10/13) | Control name<br>Electrical characteristics |
|------------------------------|---------|--|

***Authentication / Pairing***

|                          |      |                   |     |  |
|--------------------------|------|-------------------|-----|--|
| Authentication _Complete | 0x06 | Status            | Yes |  |
|                          |      | Connection Handle |     |  |
| Return _Link _Keys       | 0x15 | Num Keys          | Yes |  |
|                          |      | BD ADDR [I]       |     |  |
|                          |      | Link Key [I]      |     |  |
| PIN _Code _Request       | 0x16 | BD ADDR           | Yes |  |
| Link _Key _Request       | 0x17 | BD ADDR           | Yes |  |
| Link _Key _Notification  | 0x18 | BD ADDR           | Yes |  |
|                          |      | Link Key          |     |  |

***Encryption***

|   |      |                   |     |  |
|---|------|-------------------|-----|--|
| Encryption _Change                      | 0x08 | Status            | Yes |  |
|   |      | Connection Handle |     |  |
|   |      | Encryption Enable |     |  |
| Change _Connection _Link _Key _Complete | 0x09 | Status            | Yes |  |
|   |      | Connection Handle |     |  |
| Master _Link _Key _Complete             | 0x0A | Status            | Yes |  |
|   |      | Connection Handle |     |  |
|   |      | Key Flag          |     |  |

***Remote Information***

|  |      |                     |     |   |
|--|------|---------------------|-----|---|
| Remote _Name _Request _Complete              | 0x07 | Status              | Yes |   |
|  |      | BD ADDR             |     |   |
|  |      | Remote Name         |     |   |
| Read _Remote _Supported _Features _Complete  | 0x0B | Status              | Yes |   |
|  |      | Connection Handle   |     |   |
|  |      | LMP Features        |     |   |
| Read _Remote _Version _Information _Complete | 0x0C | Status              | Yes |   |
|  |      | Connection Handle   |     |   |
|  |      | LMP Version         |     |   |
|  |      | Manufacture Name    |     |   |
| Read _Remote _Extended _Features _Complete   | 0x23 | LMP Subversion      | Yes | b |
|  |      | Status              |     |   |
|  |      | Connection Handle   |     |   |
|  |      | Page Number         |     |   |
|  |      | Maximum page number |     |   |
| Extended LMP Features                        |      |                     |     |   |



**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |         |  |
|------------------------------|---------|--|
| Control No.<br>HD-AE-C051089 | (11/13) | Control name<br>Electrical characteristics |
|------------------------------|---------|--|

**Link Policy**

|                             |      |                   |     |     |
|-----------------------------|------|-------------------|-----|-----|
| QoS_Setup_Complete          | 0x0D | Status            | Yes |     |
|                             |      | Connection Handle |     |     |
|                             |      | Flags             |     |     |
|                             |      | Service Type      |     |     |
|                             |      | Token Rate        |     |     |
|                             |      | Peak Bandwidth    |     |     |
|                             |      | Latency           |     |     |
| Role_Change                 | 0x12 | Status            | Yes |     |
|                             |      | BD ADDR           |     |     |
|                             |      | New Role          |     |     |
| Mode_Change                 | 0x14 | Status            | Yes |     |
|                             |      | Connection Handle |     |     |
|                             |      | Current Mode      |     |     |
|                             |      | Interval          |     |     |
| Flow_Specification_Complete | 0x21 | Status            | Yes | b,c |
|                             |      | Connection Handle |     |     |
|                             |      | Flags             |     |     |
|                             |      | Flow direction    |     |     |
|                             |      | Service Type      |     |     |
|                             |      | Token Rate        |     |     |
|                             |      | Token Bucket Size |     |     |
|                             |      | Peak Bandwidth    |     |     |
| Access Latency              |      |                   |     |     |

**General**

|                             |      |                             |     |   |
|-----------------------------|------|-----------------------------|-----|---|
| Command_Complete            | 0x0E | Num HCI Command Packets     | Yes |   |
|                             |      | Command Opcode              |     |   |
|                             |      | Return Parameters           |     |   |
| Command_Status              | 0x0F | Status                      | Yes |   |
|                             |      | Num HCI Command Packets     |     |   |
|                             |      | Command Opcode              |     |   |
| Hardware_Error              | 0x10 | Hardware Code               | Yes |   |
| Number_Of_Completed_Packets | 0x13 | Number of Handles           | Yes |   |
|                             |      | Connection Handle [I]       |     |   |
|                             |      | HC Num HCI Data Packets [I] |     |   |
| Data_Buffer_Overflow        | 0x1A | Link Type                   | No  | a |
| Max_Slots_Change            | 0x1B | Connection Handle           | Yes |   |
|                             |      | LMP Max Slots               |     |   |
| Read_Clock_Offset_Complete  | 0x1C | Status                      | Yes |   |
|                             |      | Connection Handle           |     |   |
|                             |      | Clock Offset                |     |   |

**Host Controller & Baseband**

|                                  |      |                           |     |   |
|----------------------------------|------|---------------------------|-----|---|
| Flush_Occurred                   | 0x11 | Connection Handle         | Yes |   |
| Loopback_Command                 | 0x19 | HCI Command Packet        | Yes |   |
| Connection_Packet_Type_Change    | 0x1D | Status                    | Yes |   |
|                                  |      | Connection Handle         |     |   |
|                                  |      | Packet Type               |     |   |
| QoS_Violation                    | 0x1E | Connection Handle         | No  |   |
| Page_Scan_Mode_Change            | 0x1F | BD ADDR                   | No  | d |
|                                  |      | Page Scan Mode            |     |   |
| Page_Scan_Repetition_Mode_Change | 0x20 | BD ADDR                   | Yes |   |
|                                  |      | Page Scan Repetition Mode |     |   |

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |         |  |
|------------------------------|---------|--|
| Control No.<br>HD-AE-C051089 | (12/13) | Control name<br>Electrical characteristics |
|------------------------------|---------|--|

## Notes:


- a) Significance and expected recovery procedure is ill defined.
- b) Event not in the Bluetooth v1.1 specification.
- c) Event provoked by local Flow Specification command, even through the command is not implemented.
- d) Optional paging schemes not supported. Bluetooth v1.1 specification only.

# EYSFDCAXW

TAIYO YUDEN Confidential  
& Tentative

|                              |         |  |
|------------------------------|---------|--|
| Control No.<br>HD-AE-C051089 | (13/13) | Control name<br>Electrical characteristics |
|------------------------------|---------|--|

## Module Stack

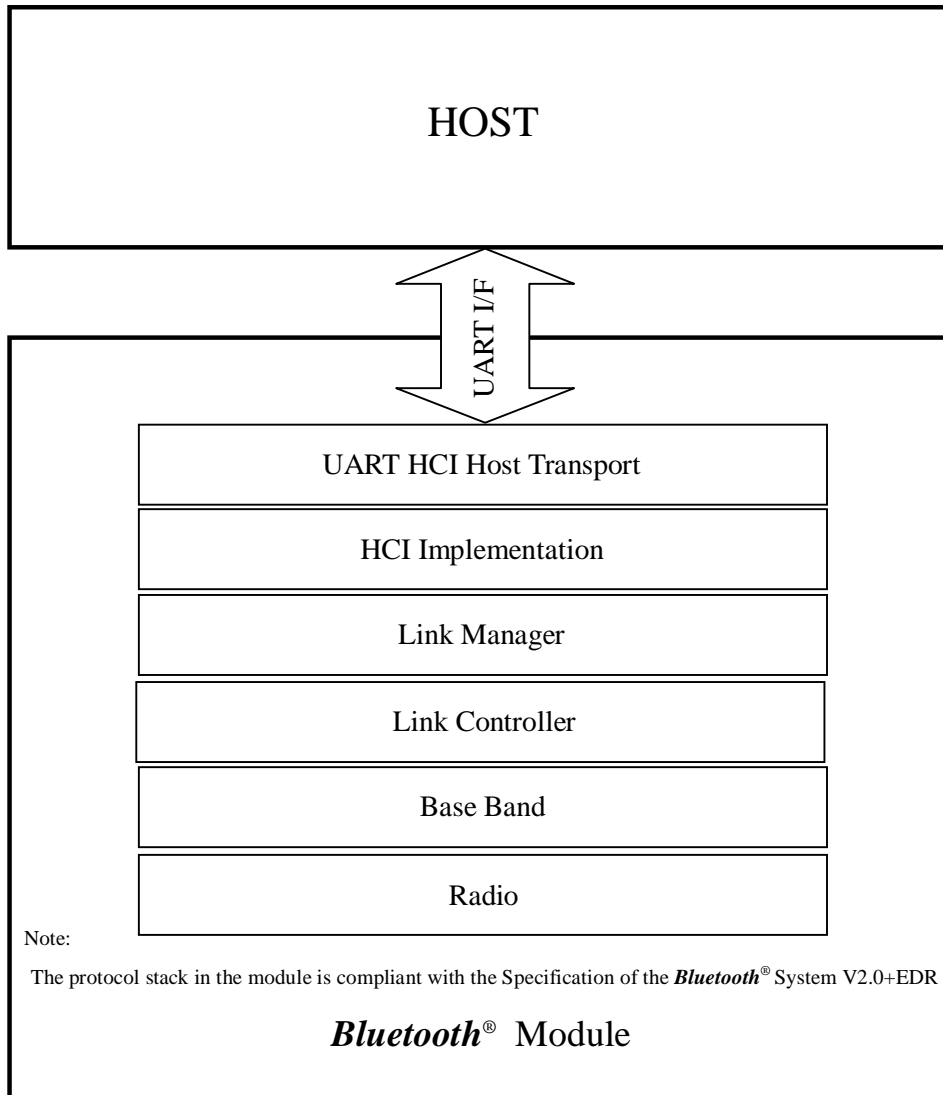

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |        |  |
|------------------------------|--------|--|
| Control No.<br>HD-AE-D051089 | (1/10) | Control name<br>Electrical characteristics |
|------------------------------|--------|--|

**PICS for Firmware Version19.2 (Build1915)**

The *Bluetooth*<sup>®</sup> functions of this module are as below. Depending on firmware version upgrade, the *Bluetooth*<sup>®</sup> functions are subject to change without notice.

**SUMMARY****Table 2-1: Controller Core Specification**

| Item | Specification Name  | Support |
|------|---|---------|
| 1    | Core Spec Version 1.1, Adopted 5 Feb 2001 (Ver. 1.1)            | No      |
| 2    | Core Spec Version 1.2, Adopted 5 Nov 2003 (Ver. 1.2)            | No      |
| 3    | Core Spec Version 2.0, Adopted 4 Nov 2004 (Ver. 2.0)            | No      |
| 4    | Core Spec Version 2.0 + EDR, Adopted 4 Nov 2004(Ver. 2.0 + EDR) | Yes     |

**Table 2-2: EDR Features**

Prerequisite: 2-1/4 (Ver. 2.0 + EDR)

| Item | Feature                                       | Support |
|------|---|---------|
| 1    | EDR for asynchronous transports (single slot) | Yes     |
| 2    | EDR for asynchronous transports (multi-slot)  | Yes     |
| 3    | EDR for synchronous transports                | Yes     |

**RF****RF Capabilities (based on PICS proforma for Radio):****Table A.1: RF Capabilities**

| Item | Capability                      | Status | Support | Values  |           |
|------|---------------------------------|--------|---------|---------|-----------|
|      |                                 |        |         | Allowed | Supported |
| 1    | Power Class (1,2 or 3)          | M      | Yes     | 1 .. 3  | 2         |
| 2    | Power Control                   | C.1    | Yes     | -       | -         |
| 3    | 1-slot packets supported        | M      | Yes     | -       | -         |
| 4    | 3-slot packets supported        | O      | Yes     | -       | -         |
| 5    | 5-slot packets supported        | O      | Yes     | -       | -         |
| 6    | 79 Channels                     | M      | Yes     | -       | -         |
| 7    | Support for GFSK modulation     | M      | Yes     | -       | -         |
| 8    | Support for /4-DQPSK modulation | C.2    | Yes     | -       | -         |
| 9    | Support for 8DPSK modulation    | C.3    | Yes     | -       | -         |

C.1: Mandatory to support if Power Class 1 is supported, optional to support if Power Class 2 or 3 is supported.

C.2: Mandatory if SUMMARY, 2-1/4 is claimed; Optional if SUMMARY, 2-1/3 is claimed; Excluded otherwise.

C.3: Mandatory if SUMMARY, 2-1/4 is claimed; Else Optional if (RF, 1/8 AND SUMMARY, 2-1/3) is claimed;

Excluded otherwise.

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |        |  |
|------------------------------|--------|--|
| Control No.<br>HD-AE-D051089 | (2/10) | Control name<br>Electrical characteristics |
|------------------------------|--------|--|

**Baseband****Baseband Capabilities (based on PICS proforma for Baseband)****Table B.1: Physical Channel**

| Item | Capability                                | Status | Support |
|------|---|--------|---------|
| 1    | Support frequency band and 79 RF channels | M      | Yes     |
| 2    | Adaptive Frequency Hopping Kernel         | M      | Yes     |

**Table B.1a: Modulation schemes**

|   |  |     |     |
|---|--|-----|-----|
| 1 | Basic Data Rate, 1 Mbps payload data rate    | M   | Yes |
| 2 | Enhanced Data Rate, 2 Mbps payload data rate | C.1 | Yes |
| 3 | Enhanced Data Rate, 3 Mbps payload data rate | C.2 | Yes |

C.1: Mandatory if (SUMMARY, 2-1/4) is claimed; Optional if (SUMMARY, 2-1/3) is claimed; Excluded otherwise.

C.2: Mandatory if (SUMMARY, 2-1/4) is claimed; Optional if (BB, 1a/2 AND SUMMARY, 2-1/3) is claimed;  
Excluded otherwise.**Table B.2: Link Types**

| Item | Capability                               | Status | Support |
|------|--|--------|---------|
| 1    | Support of ACL link                      | M      | Yes     |
| 2    | Support of SCO link                      | O      | Yes     |
| 3    | Support of eSCO link                     | O      | Yes     |
| 4    | Support of Enhanced Data Rate ACL links  | C.1    | Yes     |
| 5    | Support of Enhanced Data Rate eSCO links | C.2    | Yes     |

C.1: Mandatory IF (SUMMARY, 2-2/1 OR SUMMARY, 2-2/2) is claimed;

ELSE Optional IF (SUMMARY, 2-1/3 OR SUMMARY, 2-1/4) is claimed; Excluded otherwise.

C.2: Mandatory IF SUMMARY, 2-2/3 is claimed; ELSE Optional IF (SUMMARY, 2-1/3 OR SUMMARY, 2-1/4) is claimed;  
Excluded otherwise.**Table B.3: SCO Link Support**

Prerequisite: B.2/2 (Support of SCO link)

| Item | Capability                       | Status | Support | Values  |           |
|------|----------------------------------|--------|---------|---------|-----------|
|      |                                  |        |         | Allowed | Supported |
| 1    | SCO links to same Slave          | C.1    | No      | 1 .. 3  | 3         |
| 2    | SCO links to different Slaves    | O      | No      | 1 .. 3  | 3         |
| 3    | SCO links from same Master       | C.1    | No      | 1.. 3   | 3         |
| 4    | SCO links from different Masters | O      | No      | 2       | -         |

C.1: Mandatory to support at least 1 link.

Prerequisite: B.2/3 (Support of eSCO link)

| Item | Capability                        | Status | Support | Values   |           |
|------|-----------------------------------|--------|---------|----------|-----------|
|      |                                   |        |         | Allowed  | Supported |
| 5    | eSCO links to same Slave          | C.2    | No      | (1 .. 6) | 6         |
| 6    | eSCO links to different Slaves    | O      | No      | (2 .. 5) | 3         |
| 7    | eSCO links from same Master       | C.2    | No      | (1 .. 6) | 6         |
| 8    | eSCO links from different Masters | O      | No      | (2 .. )  | -         |

C.2: Mandatory to support at least 1 link.

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |        |  |
|------------------------------|--------|--|
| Control No.<br>HD-AE-D051089 | (3/10) | Control name<br>Electrical characteristics |
|------------------------------|--------|--|

**Table B.4: Common Packet Types**

| Item | Capability                  | Status | Support |
|------|-----------------------------|--------|---------|
| 1    | Support of ID packet type   | M      | Yes     |
| 2    | Support of NULL packet type | M      | Yes     |
| 3    | Support of POLL packet type | M      | Yes     |
| 4    | Support of FHS packet type  | M      | Yes     |
| 5    | Support of DM1 packet type  | M      | Yes     |

**Table B.5: ACL Packet Types**

| Item | Capability                  | Status | Support |
|------|-----------------------------|--------|---------|
| 1    | Support of DH1 packet type  | M      | Yes     |
| 2    | Support of DM3 packet type  | O      | Yes     |
| 3    | Support of DH3 packet type  | O      | Yes     |
| 4    | Support of DM5 packet type  | O      | Yes     |
| 5    | Support of DH5 packet type  | O      | Yes     |
| 6    | Support of AUX1 packet type | O      | Yes     |

**Table B.5a: Enhanced Data Rate ACL packet types**

Prerequisite: B.2/4 (Support of Enhanced Data Rate ACL links)

| Item | Capability                | Status | Support |
|------|---------------------------|--------|---------|
| 1    | Support 2-DH1 packet type | C.1    | Yes     |
| 2    | Support 2-DH3 packet type | C.2    | Yes     |
| 3    | Support 2-DH5 packet type | C.2    | Yes     |
| 4    | Support 3-DH1 packet type | C.3    | Yes     |
| 5    | Support 3-DH3 packet type | C.4    | Yes     |
| 6    | Support 3-DH5 packet type | C.5    | Yes     |

C.1: Mandatory IF (SUMMARY, 2-2/1 OR SUMMARY, 2-2/2) is claimed; ELSE Optional IF BB, 1a/2 is claimed;

Excluded otherwise.

C.2: Mandatory IF SUMMARY, 2-2/2 is claimed; ELSE Optional IF BB, 1a/2 is claimed; Excluded otherwise.

C.3: Mandatory IF (SUMMARY, 2-2/1 OR SUMMARY, 2-2/2) is claimed; ELSE Optional IF BB 1a/3 is claimed;

Excluded otherwise.

C.4: Mandatory IF SUMMARY, 2-2/2 is claimed; ELSE Optional IF (BB, 5a/2 AND BB, 5a/4) is claimed;

Excluded otherwise.

C.5: Mandatory IF SUMMARY 2-2/2 is claimed; ELSE Optional IF (BB, 5a/3 AND BB, 5a/4) is claimed; Excluded otherwise.

**Table B.6: SCO and eSCO Packet Types**

Prerequisite for items 1-4: B.2/2 (Support of SCO link)

| Item | Capability                 | Status | Support |
|------|----------------------------|--------|---------|
| 1    | Support of HV1 packet type | M      | Yes     |
| 2    | Support of HV2 packet type | O      | Yes     |
| 3    | Support of HV3 packet type | O      | Yes     |
| 4    | Support of DV packet type  | M      | Yes     |

Prerequisite for items 5-7: B.2/3 (Support of eSCO link)

| Item | Capability                 | Status | Support |
|------|----------------------------|--------|---------|
| 5    | Support of EV3 packet type | M      | Yes     |
| 6    | Support of EV4 packet type | O      | Yes     |
| 7    | Support of EV5 packet type | O      | Yes     |

|                              |        |  |
|------------------------------|--------|--|
| Control No.<br>HD-AE-D051089 | (4/10) | Control name<br>Electrical characteristics |
|------------------------------|--------|--|

**Table B.6a: Enhanced Data Rate eSCO packet types**

Prerequisite: B.2/5 (Support of Enhanced Data Rate eSCO links)

| Item | Capability                | Status | Support |
|------|---------------------------|--------|---------|
| 1    | Support 2-EV3 packet type | C.1    | Yes     |
| 2    | Support 2-EV5 packet type | C.2    | Yes     |
| 3    | Support 3-EV3 packet type | C.3    | Yes     |
| 4    | Support 3-EV5 packet type | C.4    | Yes     |

C.1: Mandatory IF SUMMARY, 2-2/3 is claimed; ELSE Optional IF BB, 1a/2 is claimed; Excluded otherwise.

C.2: Optional IF BB, 1a/2 is claimed; Excluded otherwise.

C.3: Mandatory IF SUMMARY, 2-2/3 is claimed; ELSE Optional IF BB, 1a/3 is claimed; Excluded otherwise.

C.4: Optional IF BB, 1a/3 is claimed; Excluded otherwise.

**Table B.7: Page Procedures**

| Item | Capability                                | Status | Support |
|------|---|--------|---------|
| 1    | Support paging                            | M      | Yes     |
| 2    | Support page scan                         | M      | Yes     |
| 3    |   |        |         |
| 4    |   |        |         |
| 5    | Supports Interlaced Scan during page scan | O      | Yes     |

**Table B.8: Paging Schemes**

| Item | Capability                    | Status | Support |
|------|-------------------------------|--------|---------|
| 1    | Supports mandatory scan mode) | M      | Yes     |

**Table B.9: Paging Modes**

| Item | Capability              | Status | Support |
|------|-------------------------|--------|---------|
| 1    | Supports paging mode R0 | C.1    | Yes     |
| 2    | Supports paging mode R1 | C.1    | Yes     |
| 3    | Supports paging mode R2 | C.1    | Yes     |

C.1: At least one of the paging scan modes must be supported.

**Table B.9 (b): Paging Train Repetition**

| Item | Capability                   | Status | Support |
|------|------------------------------|--------|---------|
| 1    | Supports $N_{page} \geq 1$   | O      | Yes     |
| 2    | Supports $N_{page} \geq 128$ | O      | Yes     |
| 3    | Supports $N_{page} \geq 256$ | M      | Yes     |

Note: The master should use  $N_{page} \geq 256$  unless it knows what SR mode the slave uses.**Table B.10: Inquiry Procedures**

| Item | Capability                                   | Status | Support |
|------|--|--------|---------|
| 1    | Support inquiry                              | O      | Yes     |
| 2    | Inquiry scan with first FHS                  | O      | Yes     |
| 3    |  |        |         |
| 4    |  |        |         |
| 5    | Supports the dedicated inquiry access code   | O      | Yes     |
| 6    | Supports Interlaced Scan during inquiry scan | O      | Yes     |

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |        |  |
|------------------------------|--------|--|
| Control No.<br>HD-AE-D051089 | (5/10) | Control name<br>Electrical characteristics |
|------------------------------|--------|--|

**Table B.11: Piconet Capabilities**

| Item | Capability                      | Status | Support | Values  |           |
|------|---------------------------------|--------|---------|---------|-----------|
|      |                                 |        |         | Allowed | Supported |
| 1    | Broadcast messages              | O      | Yes     | N/A     | -         |
| 2    | Point-to-multipoint connections | O      | Yes     | (2..7)  | 7         |

**Table B.12: Scatternet Capabilities**

| Item | Capability   | Status | Support |
|------|--|--------|---------|
| 1    | Act as Master in one piconet and as Slave in another piconet | O      | Yes     |
| 2    | Act as Slave in more than one piconet                        | O      | Yes     |

**Table B.13: Synchronous Coding Schemes**

Prerequisite: B.2/2 (SCO link Support)

| Item | Capability                   | Status | Support |
|------|------------------------------|--------|---------|
| 1    | A-law                        | O      | Yes     |
| 2    | u-law                        | O      | Yes     |
| 3    | CVSD                         | O      | Yes     |
| 4    | Transparent Synchronous Data | O      | Yes     |

**Link Manager****Link Manager Capabilities (based on PICS proforma for Link Manager)****Table C.1: Response Messages**

| Item | Capability     | Status | Support |
|------|----------------|--------|---------|
| 1    | Accept message | M      | Yes     |
| 2    | Reject message | M      | Yes     |

**Table C.2: Supported Features**

| Item | Capability                       | Status | Support |
|------|----------------------------------|--------|---------|
| 1    | 3-slot packets                   | O      | Yes     |
| 2    | 5-slot packets                   | O      | Yes     |
| 3    | Encryption                       | O      | Yes     |
| 4    | Slot offset                      | O      | Yes     |
| 5    | Timing accuracy                  | O      | Yes     |
| 6    | Role switch (Master/Slave)       | O      | Yes     |
| 7    | Hold mode                        | O      | Yes     |
| 8    | Sniff mode                       | O      | Yes     |
| 9    | Park mode                        | O      | Yes     |
| 10   | Power Control                    | C.1    | Yes     |
| 11   | Channel quality driven data rate | O      | Yes     |
| 12   | SCO link                         | O      | Yes     |
| 13   | RSSI                             | O      | Yes     |
| 14   | Broadcast encryption             | O      | Yes     |
| 15   | eSCO link                        | O      | Yes     |
| 16   | Adaptive frequency hopping       | M      | Yes     |
| 17   | Enhanced Data Rate ACL           | C.2    | Yes     |
| 18   | Enhanced Data Rate eSCO          | C.3    | Yes     |

C.1: If Power Class 1 is supported (RF, 1/1=1) then Mandatory, else Optional.

C.2: Mandatory IF (SUMMARY 2-2/1 OR SUMMARY 2-2/2) is claimed;

ELSE Optional IF (SUMMARY 2-1/3 OR SUMMARY 2-1/4) is claimed; Excluded otherwise.

C.3: Mandatory IF SUMMARY 2-2/3 is claimed; ELSE Optional IF (SUMMARY 2-1/3 OR SUMMARY 2-1/4) is claimed;

Excluded otherwise.



|                              |        |  |
|------------------------------|--------|--|
| Control No.<br>HD-AE-D051089 | (6/10) | Control name<br>Electrical characteristics |
|------------------------------|--------|--|

**Table C.3: Authentication**

| Item | Capability  | Status | Support |
|------|---|--------|---------|
| 1    | Initiate authentication before connection completed | O      | Yes     |
| 2    | Initiate authentication after connection completed  | O      | Yes     |
| 3    | Respond to authentication request                   | M      | Yes     |

**Table C.4: Pairing**

| Item | Capability  | Status | Support |
|------|---|--------|---------|
| 1    | Initiate pairing before connection completed            | O      | Yes     |
| 2    | Initiate pairing after connection completed             | O      | Yes     |
| 3    | Respond to pairing request                              | M      | Yes     |
| 4    | Use fixed PIN and request responder to initiator switch | C.1    | Yes     |
| 5    | Use variable PIN  | C.1    | Yes     |
| 6    | Accept initiator to responder switch                    | C.2    | Yes     |

C.1: Mandatory to support at least one of Pairing /4 and Pairing /5.

C.2: Mandatory to support if Pairing /5 AND (Pairing /1 OR Pairing /2) is supported.

**Table C.5: Link Keys**

| Item | Capability                             | Status | Support |
|------|--|--------|---------|
| 1    | Creation of link key - Unit Key        | C.1    | Yes     |
| 2    | Creation of link key - Combination Key | C.1    | Yes     |
| 3    | Initiate change of link key            | O      | Yes     |
| 4    | Accept change of link key              | M      | Yes     |
| 5    |  |        |         |
| 6    |  |        |         |
| 7    | Accept pairing with Unit Key           | O      | Yes     |

C.1: Mandatory to support at least one of the key types.

**Table C.6: Encryption**

Prerequisite: C.2/3 (Encryption supported)

| Item | Capability                 | Status | Support |
|------|----------------------------|--------|---------|
| 1    | Initiate encryption        | O      | Yes     |
| 2    | Accept encryption requests | M      | Yes     |
| 3    |                            |        |         |
| 4    |                            |        |         |
| 5    | Key size negotiation       | M      | Yes     |
| 6    | Start encryption           | M      | Yes     |
| 7    | Accept start of encryption | M      | Yes     |
| 8    | Stop encryption            | M      | Yes     |
| 9    | Accept stop of encryption  | M      | Yes     |

**Table C.7: Clock Offset Information**

| Item | Capability                       | Status | Support |
|------|----------------------------------|--------|---------|
| 1    | Request clock offset information | O      | Yes     |
| 2    | Respond to clock offset requests | M      | Yes     |

|                              |        |  |
|------------------------------|--------|--|
| Control No.<br>HD-AE-D051089 | (7/10) | Control name<br>Electrical characteristics |
|------------------------------|--------|--|

**Table C.8: Slot Offset Information**

Prerequisite: C.2/4 (Slot offset)

| Item | Capability                   | Status | Support |
|------|------------------------------|--------|---------|
| 1    | Send slot offset information | C.1    | Yes     |

C.1: Mandatory to support if support if Role Switch/1 (Master/Slave switch) otherwise optional.

**Table C.9: Timing Accuracy Information**

Prerequisite: C.2/5 (Timing accuracy)

| Item | Capability                                      | Status | Support |
|------|---|--------|---------|
| 1    | Request timing accuracy information             | O      | Yes     |
| 2    | Respond to timing accuracy information requests | M      | Yes     |

**Table C.10: LM Version Information**

| Item | Capability                                 | Status | Support |
|------|--|--------|---------|
| 1    | Request LM version information             | O      | Yes     |
| 2    | Respond to LM version information requests | M      | Yes     |

**Table C.11: Feature Support**

| Item | Capability                             | Status | Support |
|------|--|--------|---------|
| 1    | Request supported features             | C.1    | Yes     |
| 2    | Respond to supported features requests | M      | Yes     |
| 3    | Request extended features mask         | C.2    | Yes     |
| 4    | Respond to extended features Request   | C.2    | Yes     |

C.1: Mandatory to support if any of the optional features in Supported Features /1-3, Supported Features /5, Supported Features /7-12, Supported Features /14-16, Adaptive Frequency Hopping /1 is requested by the IUT otherwise optional.

C.2: Mandatory if a feature requiring another features page is supported, otherwise optional.

**Table C.12: Name Information**

| Item | Capability               | Status | Support |
|------|--------------------------|--------|---------|
| 1    | Request name information | O      | Yes     |
| 2    | Respond to name requests | M      | Yes     |

**Table C.13: Role Switch**

Prerequisite: C.2/6 (Role switch)

| Item | Capability                          | Status | Support |
|------|-------------------------------------|--------|---------|
| 1    | Request Master Slave switch         | O      | Yes     |
| 2    | Accept Master Slave switch requests | M      | Yes     |

**Table C.14: Detach**

| Item | Capability        | Status | Support |
|------|-------------------|--------|---------|
| 1    | Detach connection | M      | Yes     |

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |        |  |
|------------------------------|--------|--|
| Control No.<br>HD-AE-D051089 | (8/10) | Control name<br>Electrical characteristics |
|------------------------------|--------|--|

**Table C.14a: Setting up and Removing Enhanced Data Rate ACL Connection**

| Item | Capability               | Status | Support |
|------|--------------------------|--------|---------|
| 1    | Enter Enhanced Data Rate | C.1    | Yes     |
| 2    | Exit Enhanced Data Rate  | C.1    | Yes     |

C.1: Mandatory if LMP, 2/17 supported, otherwise excluded.

**Table C.14b: Setting up and Removing Enhanced Data Rate eSCO Connection**

| Item | Capability   | Status | Support |
|------|--|--------|---------|
| 1    | Enter and exit eSCO using Enhanced Data Rate Packets | C.1    | Yes     |

C.1: Mandatory if LMP, 2/18 supported, otherwise excluded.

**Table C.15: Hold mode**

Prerequisite: 2/7 (Hold mode)

| Item | Capability                    | Status | Support |
|------|-------------------------------|--------|---------|
| 1    | Force hold mode               | O      | Yes     |
| 2    | Request hold mode             | C.1    | Yes     |
| 3    | Respond to hold mode requests | M      | Yes     |
| 4    | Accept forced hold mode       | M      | Yes     |

C.1: Mandatory to support if LMP, 15 /1 (Force hold mode) is supported, otherwise optional.

**Table C.16: Sniff mode**

Prerequisite: C.2/8 (Sniff mode)

| Item | Capability   | Status | Support |
|------|--|--------|---------|
| 1    |  |        |         |
| 2    | Request sniff mode                                     | O      | Yes     |
| 3    | Respond to sniff mode requests (renegotiate or reject) | M      | Yes     |
| 4    |  |        |         |
| 5    | Request un-sniff                                       | C.1    | Yes     |
| 6    | Accept un-sniff requests                               | M      | Yes     |

C.1: If LMP, 16/2 (Request sniff mode) is supported then mandatory to support, otherwise optional.

**Table C.17: Park mode**

Prerequisite: C.2/9 (Park Mode)

| Item | Capability                                  | Status | Support |
|------|---|--------|---------|
| 1    |   |        |         |
| 2    | Request park mode                           | O      | Yes     |
| 3    | Respond to park mode requests               | M      | Yes     |
| 4    |   |        |         |
| 5    | Set up broadcast scan window                | O      | Yes     |
| 6    | Accept changes to the broadcast scan window | M      | Yes     |
| 7    | Modify beacon parameters                    | O      | Yes     |
| 8    | Accept modification of beacon parameters    | M      | Yes     |
| 9    | Request Unpark using PM_ADDR                | C.1    | Yes     |
| 10   | Request Unpark using BD_ADDR                | C.1    | Yes     |
| 11   | Slave requested Unpark                      | O      | Yes     |
| 12   | Accept Unpark using PM_ADDR                 | M      | Yes     |
| 13   | Accept Unpark using BD_ADDR                 | M      | Yes     |

C.1: If LMP, 17/3 (Respond to park mode requests) is supported then at least one of LMP, 17 /9

(Unpark using PM\_ADDR) or LMP, 17/10 (Unpark using BD\_ADDR) is mandatory to support, otherwise optional.

|                              |        |  |
|------------------------------|--------|--|
| Control No.<br>HD-AE-D051089 | (9/10) | Control name<br>Electrical characteristics |
|------------------------------|--------|--|

**Table C.18: Power Control**

Prerequisite: C.2/13 (RSSI)

| Item | Capability                | Status | Support |
|------|---------------------------|--------|---------|
| 1    | Request to increase power | M      | Yes     |
| 2    | Request to decrease power | M      | Yes     |

Prerequisite: C.2/10 (Power control)

| Item | Capability                     | Status | Support |
|------|--------------------------------|--------|---------|
| 3    | Respond when max power reached | M      | Yes     |
| 4    | Respond when min power reached | M      | Yes     |

**Table C.19: Link supervision Timeout**

| Item | Capability                              | Status | Support |
|------|---|--------|---------|
| 1    | Set link supervision timeout value      | O      | Yes     |
| 2    | Accept link supervision timeout setting | M      | Yes     |

**Table C.20: Quality of Service**

| Item | Capability   | Status | Support |
|------|--|--------|---------|
| 1    | Channel quality driven change between DM and DH packet types | C.1    | Yes     |
| 2    | Force/Request change of Quality of Service                   | M      | Yes     |
| 3    | Request change of Quality of Service                         | M      | Yes     |

C.1: Mandatory to support if support of LMP, 2 /11 is stated in the feature request, otherwise optional.

**Table C.21: SCO Links**

Prerequisite: C.2/12 (SCO link)

| Item | Capability                               | Status | Support |
|------|--|--------|---------|
| 1    | Initiate SCO links, as Master            | O      | Yes     |
| 2    | Initiate SCO links, as Slave             | O      | Yes     |
| 3    | Accept SCO links                         | O      | Yes     |
| 4    | Remove SCO link, as Master               | C.1    | Yes     |
| 5    | Remove SCO link, as Slave                | C.2    | Yes     |
| 6    | Negotiate SCO link parameters, as Master | C.3    | Yes     |
| 7    | Negotiate SCO link parameters, sa Slave  | C.4    | Yes     |

C.1: Mandatory to support if LMP, 21 /1 (Initiating SCO links, as Master) is supported, otherwise optional.

C.2: Mandatory to support if LMP, 21 /2 (Initiating SCO links, as Slave) is supported, otherwise optional.

C.3: Mandatory to support if LMP, 21 /1 (Initiating SCO links, as Master) or LMP, 21/3 (Accept SCO links) is supported, otherwise optional.

C.4: Mandatory to support if LMP, 21 /2 (Initiating SCO links, as Slave) or LMP, 21/3 (Accept SCO links) is supported, otherwise optional. Comments:

**Table C.22: Multi-Slot Packages**

| Item | Capability   | Status | Support |
|------|--|--------|---------|
| 1    | Accept maximum allowed number of slots to be used    | C.1    | Yes     |
| 2    | Request maximum number of slots to be used           | C.1    | Yes     |
| 3    | Accept request of maximum number of slots to be used | C.1    | Yes     |

C.1: Mandatory to support if LMP, 2 /1 and/or LMP, 2 /2 is supported in the feature request, otherwise optional.

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative

|                              |         |  |
|------------------------------|---------|--|
| Control No.<br>HD-AE-D051089 | (10/10) | Control name<br>Electrical characteristics |
|------------------------------|---------|--|

**Table C.23: Paging Scheme**

| Item | Capability                      | Status | Support |
|------|---------------------------------|--------|---------|
| 1    | Request page mode to use        | O      | Yes     |
| 2    | Accept suggested page mode      | O      | Yes     |
| 3    | Request page scan mode to use   | O      | Yes     |
| 4    | Accept suggested page scan mode | O      | Yes     |

**Table C.24: Connection Establishment**

| Item | Capability   | Status | Support |
|------|--|--------|---------|
| 1    | Create connection for higher layers                            | M      | Yes     |
| 2    | Respond to requests to establish connections for higher layers | M      | Yes     |
| 3    | Indicate that link set-up is completed                         | M      | Yes     |

**Table C.25: Test Mode**

| Item | Capability   | Status | Support |
|------|--|--------|---------|
| 1    | Activate test mode   | O      | Yes     |
| 2    | Ability to reject activation of test mode if test mode is disabled     | M      | Yes     |
| 3    | Control test mode  | O      | Yes     |
| 4    | Ability to reject test mode control commands if test mode is disabled. | M      | Yes     |

**Table C.26: Adaptive Frequency Hopping**

Prerequisite: C.2/20 (AFH)

| Item | Capability  | Status | Support |
|------|---|--------|---------|
| 1    | Support of AFH switch as master                       | O      | Yes     |
| 2    | Support of AFH switch as slave                        | M      | Yes     |
| 3    | Support of Channel Classification reporting as master | C.1    | Yes     |
| 4    | Support of Channel Classification reporting as slave  | C.2    | Yes     |
| 5    | Support channel classification from host              | C.3    | Yes     |
| 6    | Support of Channel Classification                     | O      | Yes     |

C.1: Optional if LMP, 26/6 is supported, otherwise excluded.

C.2: Mandatory if LMP, 26/6 is supported, otherwise excluded.

C.3: Mandatory if LMP, 26/1 or LMP, 26/4 is supported, otherwise optional.

## Notes:


This Data Report is based on "1846\_BC4-Ext\_RF.ICS-2.0.E.0", "1847\_HCISStack2.0EDR\_BB.ICS-2.0.E.0",  
"1848\_HCISStack2.0EDR\_LMP.ICS-2.0.E.0" and "SUM.ICS-2.0.E.4".

# EYSFDCAWX

TAIYO YUDEN Confidential  
& Tentative

|                              |       |                                   |
|------------------------------|-------|-----------------------------------|
| Control No.<br>HD-MC-A051089 | (1/1) | Control name<br>Circuit Schematic |
|------------------------------|-------|-----------------------------------|




## Block Diagram

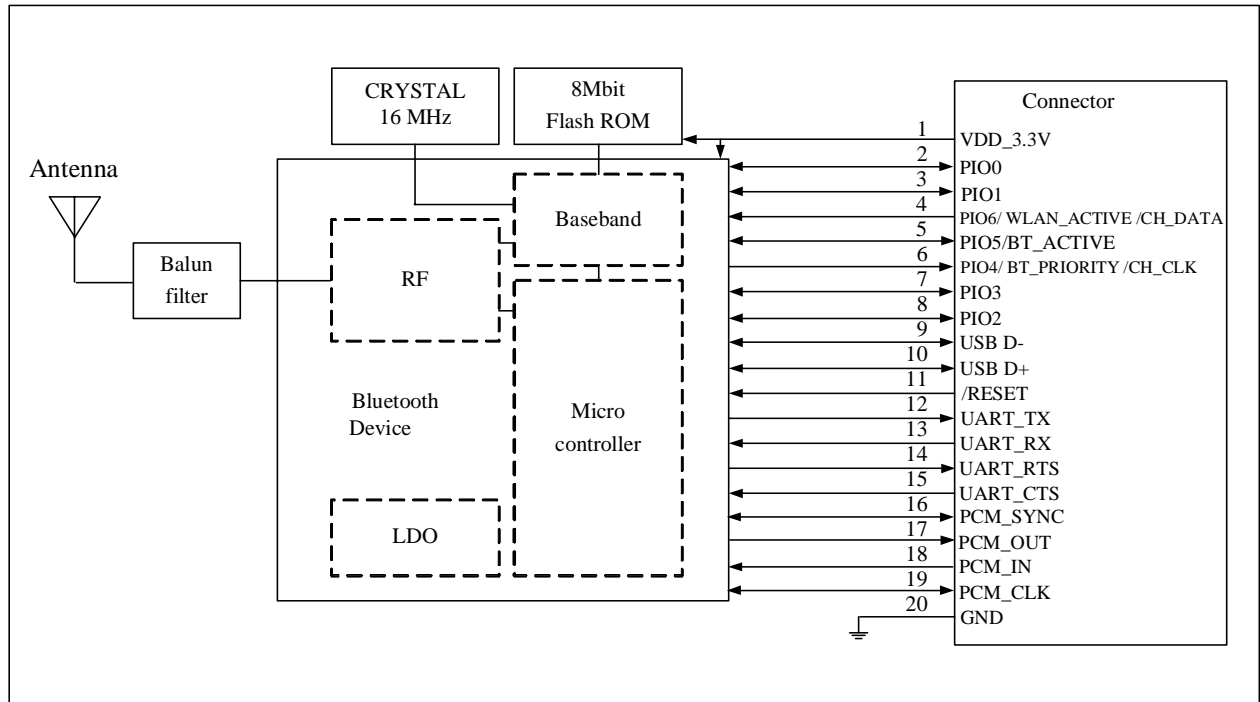

# EYSFDCAWX

TAIYO YUDEN Confidential & Tentative

|                              |       |                                    |
|------------------------------|-------|------------------------------------|
| Control No.<br>HD-AD-A051089 | (1/2) | Control name<br>Outline/Appearance |
|------------------------------|-------|------------------------------------|

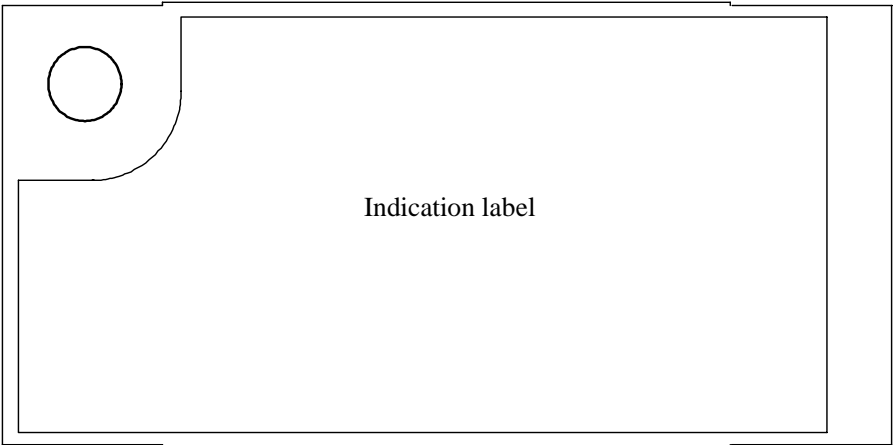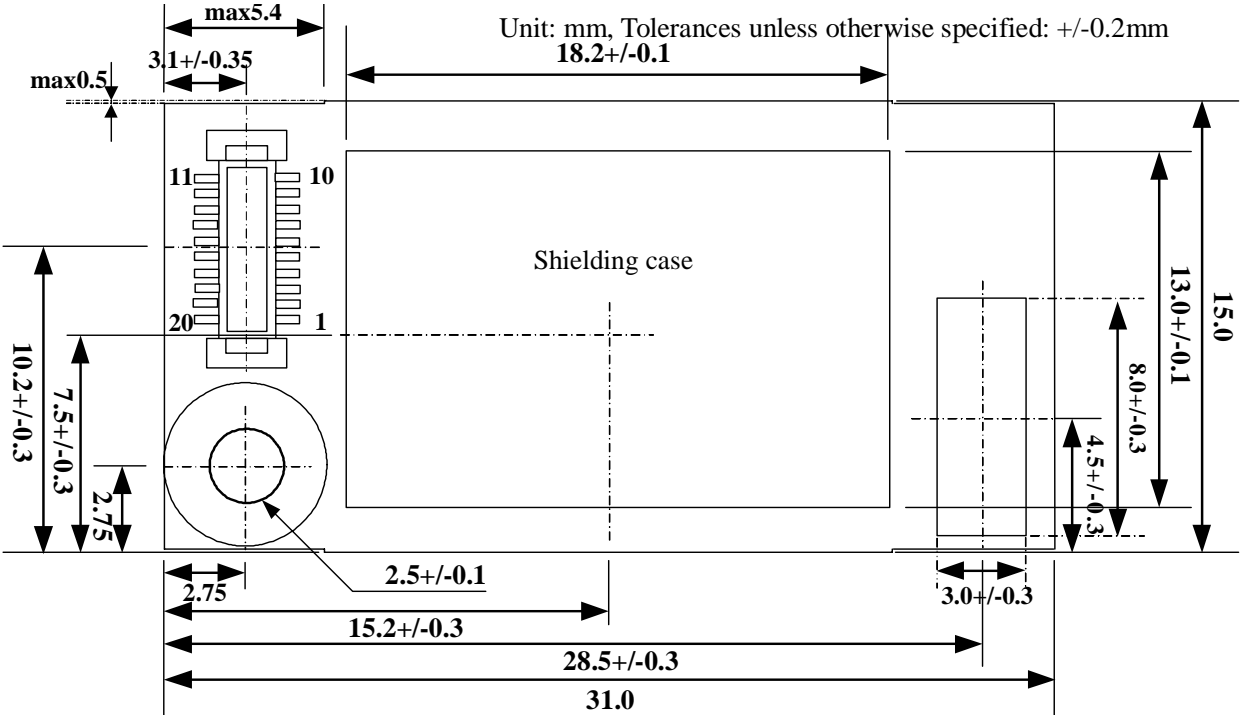

Note:

Outline/Appearance data is PRELIMINARY, not guaranteed and subject to change without notice.


# EYSFDCAXW

TAIYO YUDEN Confidential  
& Tentative

|                              |       |                                    |
|------------------------------|-------|------------------------------------|
| Control No.<br>HD-AD-A051089 | (2/2) | Control name<br>Outline/Appearance |
|------------------------------|-------|------------------------------------|

Recommendation for Module Mounting

Unit : mm

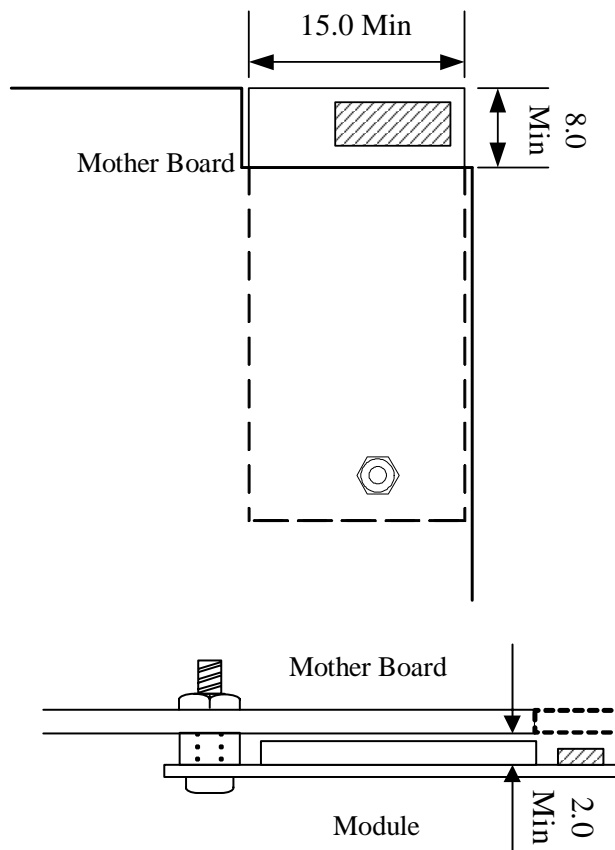

Notes:

- a. We recommend cutting motherboard, on which Taiyo Yuden module will be mounted, as described in the followings in order to ensure antenna characteristics.
- b. In addition we recommend keeping a case away from module antenna area and making the case with materials other than metal.




# EYSFDCAXW

TAIYO YUDEN Confidential  
& Tentative

|                              |       |                                    |
|------------------------------|-------|------------------------------------|
| Control No.<br>HD-AD-B051089 | (1/1) | Control name<br>Outline/Appearance |
|------------------------------|-------|------------------------------------|

## Indication label

Unit: mm

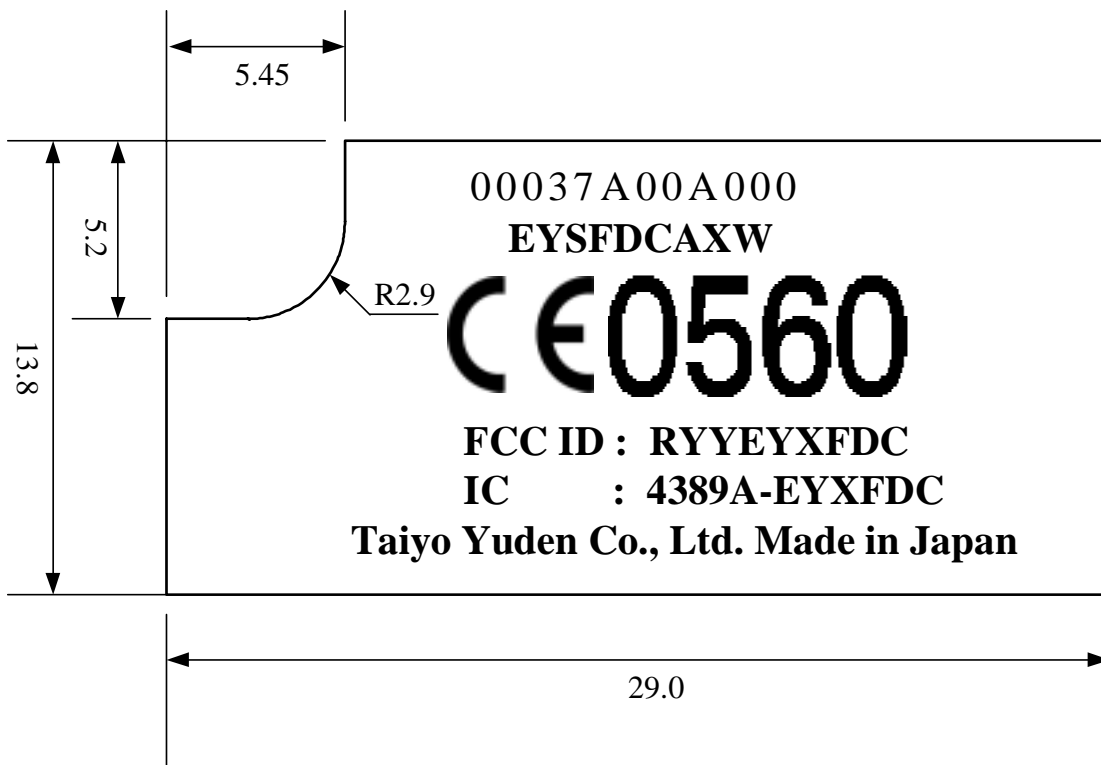

Material: PET ( UL969 ) / Label color : White

**EYSFDCA XW**TAIYO YUDEN Confidential  
& Tentative

|                              |       |                            |
|------------------------------|-------|----------------------------|
| Control No.<br>HD-BA-A051089 | (1/2) | Control name<br>Pin Layout |
|------------------------------|-------|----------------------------|

**Pin Descriptions**

| Terminal No. | Terminal name                    | Input/Output | Description  | Remark |
|--------------|----------------------------------|--------------|--|--------|
| 1            | VDD_3.3V                         | Input        | DC3.3V Power supply  | Note 1 |
| 2            | PIO0                             | Input/Output | Reserved, Keep on set side terminal open.<br>Bi-directional with programmable strength internal pull-up/down.  | Note 2 |
| 3            | PIO1                             | Input/Output | Reserved, Keep on set side terminal open.<br>Bi-directional with programmable strength internal pull-up/down.  | Note 2 |
| 4            | PIO6/<br>WLAN_ACTIVE/<br>CH_DATA | Input        | WLAN_Active/CH_Data input for Co-existence signaling.  | Note 2 |
| 5            | PIO5/<br>BT_ACTIVE               | Input/Output | Reserved, Keep on set side terminal open.<br>Bi-directional with programmable strength internal pull-up/down. (BT_Active output for Co-existence signaling.) | Note 2 |
| 6            | PIO4/<br>BT_PRIORITY/<br>CH_CLK  | Output       | BT_Priority/CH_CLK output for Co-existence signaling.  | Note 2 |
| 7            | PIO3                             | Input/Output | Reserved, Keep on set side terminal open.<br>Bi-directional with programmable strength internal pull-up/down.  | Note 2 |
| 8            | PIO2                             | Input/Output | Reserved, Keep on set side terminal open.<br>Bi-directional with programmable strength internal pull-up/down.  | Note 2 |
| 9            | USB_D-                           | -            | This signal should be connected to ground  |        |
| 10           | USB_D+                           | -            | This signal should be connected to ground  |        |
| 11           | /RESET                           | Input        | Active low RESET signal with internal weak pull-up   | Note 3 |
| 12           | UART_TX                          | Output       | TX data to host  |        |
| 13           | UART_RX                          | Input        | RX data from host (with weak internal pull-down)   |        |
| 14           | UART_RTS                         | Output       | UART request to send active low(flow control signal to host, tristatable with internal pull-up)  |        |
| 15           | UART_CTS                         | Input        | UART clear to send active low (flow control signal from host, with weak internal pull-down)  |        |
| 16           | PCM_SYNC                         | Input/Output | Synchronous data SYNC (with weak internal pull-down)   |        |
| 17           | PCM_OUT                          | Output       | Synchronous data (tristatable with internal weak pull-down)  |        |
| 18           | PCM_IN                           | Input        | Synchronous data (with internal weak pull-down)  |        |
| 19           | PCM_CLK                          | Input/Output | Synchronous data clock (with weak internal pull-down)  |        |
| 20           | GND                              | -            | Ground   |        |

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative


|                              |       |                            |
|------------------------------|-------|----------------------------|
| Control No.<br>HD-BA-A051089 | (2/2) | Control name<br>Pin Layout |
|------------------------------|-------|----------------------------|

## Notes:

1. Pin1 (VDD\_3.3V) is used for power supply of BT module. (MAX 200mA).  
To fill the standard of "Supply voltage ripple and spike noise", the capacitor ,which has the capacity of 2.2uF or more , should be put in the terminal VDD\_3.3V outside as a bypass capacitor .
2. Strength pull-downs (pull-ups) are equivalent to a few kOhms resistance, but are more accurately modeled as a 40 uA current drain (source)
3. Weak pull-ups can be thought of 1M Ohm connections to VDD, but are more accurately modeled as a -1 uA current source.
4. PCM interface will be supported in the future.



# EYSFDCAWX

## Evaluation Board Schematic Sample

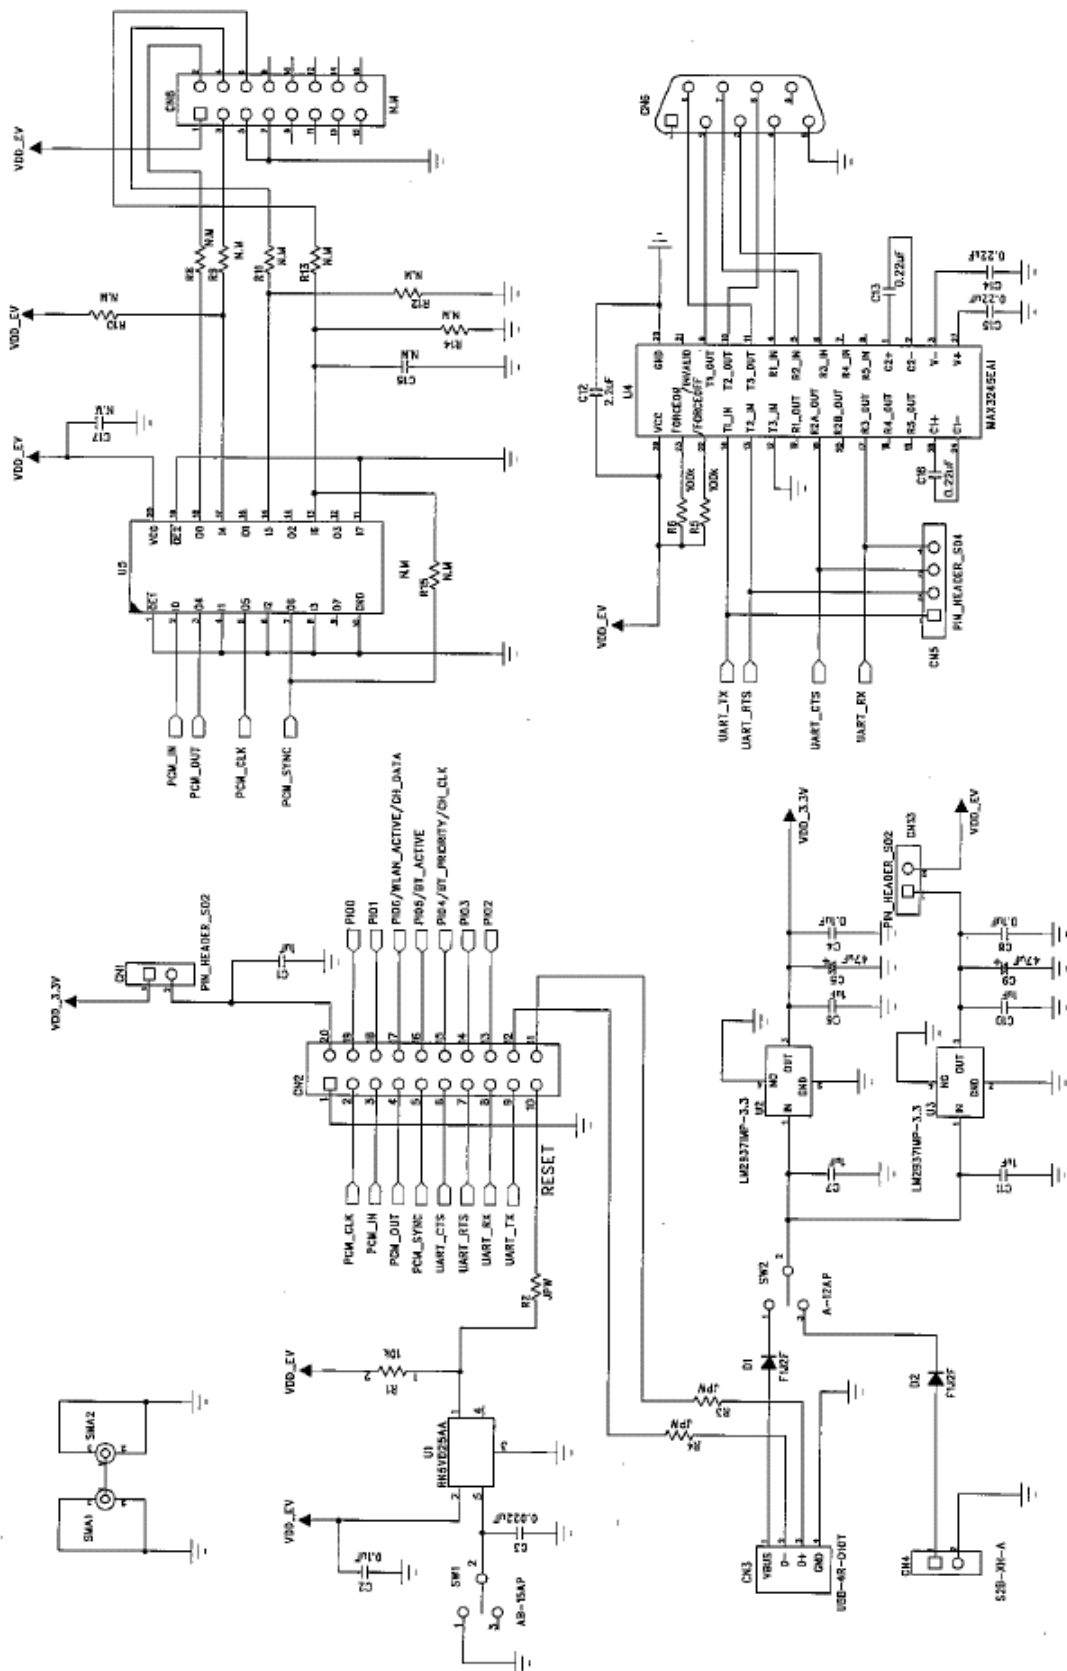

# EYSFDCAWX

TAIYO YUDEN Confidential & Tentative

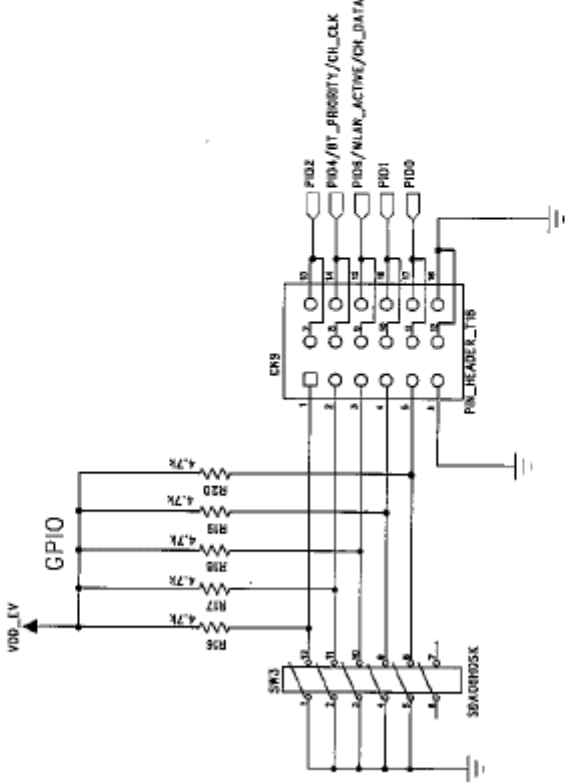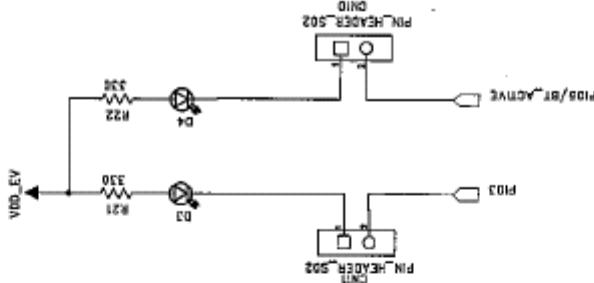

**EYSFDCAXW**TAIYO YUDEN Confidential  
& Tentative**Evaluation Board BOM Sample**

| Parts No. | Description | Value   | Parts name and standard            | Supplier                                   |
|-----------|-------------|---------|------------------------------------|--|
| U1        | IC          |         | RN5VD25AA-TR                       | RICOH or equivalent                        |
| U2        | IC          |         | LM2937IMP-3.3                      | NATIONAL or equivalent                     |
| U3        | IC          |         | LM2937IMP-3.3                      | NATIONAL or equivalent                     |
| U4        | IC          |         | MAX3245CAI                         | MAXIM                                      |
| CN1       | CONNECTOR   |         | PIN_HEADER_S02                     | HIROSE or equivalent                       |
| CN2       | CONNECTOR   |         | AX5F20545YJ<br>(Connect EYSFDCAXW) | Matsushita Electric Works<br>or equivalent |
| CN3       | CONNECTOR   |         | UBB-4R-D14T-1                      | JST or equivalent                          |
| CN4       | CONNECTOR   |         | S2B-XH-A                           | JST or equivalent                          |
| CN5       | CONNECTOR   |         | PIN_HEADER_S04                     | HIROSE or equivalent                       |
| CN6       | CONNECTOR   |         | RDED-9S-LNA                        | HIROSE or equivalent                       |
| CN7       | CONNECTOR   |         | PIN_HEADER_S02                     | HIROSE or equivalent                       |
| CN9       | CONNECTOR   |         | PIN_HEADER_T18                     | HIROSE or equivalent                       |
| CN10      | CONNECTOR   |         | PIN_HEADER_S02                     | HIROSE or equivalent                       |
| CN11      | CONNECTOR   |         | PIN_HEADER_S02                     | HIROSE or equivalent                       |
| CN12      | CONNECTOR   |         | PIN_HEADER_S02                     | HIROSE or equivalent                       |
| CN13      | CONNECTOR   |         | PIN_HEADER_S02                     | HIROSE or equivalent                       |
| SMA1      | CONNECTOR   |         | 82SMA-50-0-1                       | SUHNER or equivalent                       |
| SMA2      | CONNECTOR   |         | U.FL-R-SMT-1                       | HIROSE or equivalent                       |
| SW1       | SWITCH      |         | AB-15AP                            | NIKKAI or equivalent                       |
| SW2       | SWITCH      |         | A-12AP                             | NIKKAI or equivalent                       |
| SW3       | SWITCH      |         | SMS506                             | FUJISOKU or equivalent                     |
| C1        | CAPACITOR   | 1uF     | LMK107 BJ105KA-T                   | TAIYO YUDEN or equivalent                  |
| C2        | CAPACITOR   | 0.1uF   | EMK107 BJ104KA-T                   | TAIYO YUDEN or equivalent                  |
| C3        | CAPACITOR   | 22 nF   | TMK107 BJ223KA-T                   | TAIYO YUDEN or equivalent                  |
| C4        | CAPACITOR   | 0.1uF   | EMK107 BJ104KA-T                   | TAIYO YUDEN or equivalent                  |
| C5        | CAPACITOR   | 47uF    | TMCM-C 1A 476M                     | HITACHI AIC or equivalent                  |
| C6        | CAPACITOR   | 1uF     | LMK107 BJ105KA-T                   | TAIYO YUDEN or equivalent                  |
| C7        | CAPACITOR   | 1uF     | LMK107 BJ105KA-T                   | TAIYO YUDEN or equivalent                  |
| C8        | CAPACITOR   | 0.1uF   | EMK107 BJ104KA-T                   | TAIYO YUDEN or equivalent                  |
| C9        | CAPACITOR   | 47uF    | TMCM-C 1A 476M                     | HITACHI AIC or equivalent                  |
| C10       | CAPACITOR   | 1uF     | LMK107 BJ105KA-T                   | TAIYO YUDEN or equivalent                  |
| C11       | CAPACITOR   | 1uF     | LMK107 BJ105KA-T                   | TAIYO YUDEN or equivalent                  |
| C12       | CAPACITOR   | 2.2uF   | JMK107 BJ225MA-T                   | TAIYO YUDEN or equivalent                  |
| C13       | CAPACITOR   | 0.22uF  | EMK107 BJ224KA-T                   | TAIYO YUDEN or equivalent                  |
| C14       | CAPACITOR   | 0.22uF  | EMK107 BJ224KA-T                   | TAIYO YUDEN or equivalent                  |
| C15       | CAPACITOR   | 0.22uF  | EMK107 BJ224KA-T                   | TAIYO YUDEN or equivalent                  |
| C16       | CAPACITOR   | 0.22uF  | EMK107 BJ224KA-T                   | TAIYO YUDEN or equivalent                  |
| R1        | RESISTOR    | 10k ohm | MCR03 103J                         | ROHM or equivalent                         |
| R2        | RESISTOR    | JPW     | MCR03 JPW                          | ROHM or equivalent                         |
| R3        | RESISTOR    | JPW     | MCR03 JPW                          | ROHM or equivalent                         |
| R4        | RESISTOR    | JPW     | MCR03 JPW                          | ROHM or equivalent                         |

**EYSFDCAWX**TAIYO YUDEN Confidential  
& Tentative

| Parts No. | Description   | Value    | Parts name and standard | Supplier             |
|-----------|---------------|----------|-------------------------|----------------------|
| R5        | RESISTOR      | 100k ohm | MCR03 104J              | ROHM or equivalent   |
| R6        | RESISTOR      | 100k ohm | MCR03 104J              | ROHM or equivalent   |
| R16       | RESISTOR      | 4.7k ohm | MCR03 472J              | ROHM or equivalent   |
| R17       | RESISTOR      | 4.7k ohm | MCR03 472J              | ROHM or equivalent   |
| R18       | RESISTOR      | 4.7k ohm | MCR03 472J              | ROHM or equivalent   |
| R19       | RESISTOR      | 4.7k ohm | MCR03 472J              | ROHM or equivalent   |
| R20       | RESISTOR      | 4.7k ohm | MCR03 472J              | ROHM or equivalent   |
| R21       | RESISTOR      | 330 ohm  | MCR03 331J              | ROHM or equivalent   |
| R22       | RESISTOR      | 330 ohm  | MCR03 331J              | ROHM or equivalent   |
| D1        | DIODE         |          | F1J2F                   | ORIJIN or equivalent |
| D2        | DIODE         |          | F1J2F                   | ORIJIN or equivalent |
| D3        | DIODE         |          | SML-010MT(GREEN)        | ROHM or equivalent   |
| D4        | DIODE         |          | SML-010MT(GREEN)        | ROHM or equivalent   |
|           | SMA CONNECTOR |          | 82 SMA-50-0-1/111NH     | SCHNER or equivalent |