



SCREWDRIVERS

3C-SCREWDRIVER

> 345



3C-SCREWDRIVER WITH STRIKING CAP

> 350



SCREWDRIVER WITH WOODEN HANDLE

> 351



ELECTRONIC SCREWDRIVER

> 352



T-HANDLES

> 354



HEXAGON ALLEN KEYS

> 357



VARIOUS

> 363



GEDORE SCREWDRIVERS

powerful, unerring, absolute precision, wear-resistant

- > The torque required by the German Standards Institute (DIN/ISO) is exceeded considerably
- > The ideal all-rounder for screws in wood, plastic and metal



Striking cap
Seized screws are loosened by gently knocking on the striking cap. Full-length blade transfers the full 100% impact force onto the blade tip.



Infoprint
Head marking for specifically and rapidly accessing the right screwdriver



Useful hanging hole



Ergonomic handle design

- > Ergonomic grip design for optimum power transfer
- > Maximum force involving minimum effort
- > Extensive contact surface with the hand
- > Ergonomically appropriately placed hard and soft elements give the grip its GEDORE typical kind-to-hands feel
- > Suitable for small hands, large hands and for both right and left-handers



3-component handle

- > Soft fast turning zone with hard power point - gets the power there quickly
- > Power point also ensures that the forefinger reliably guides the blade
- > The hard core is inside the grip. It takes up the force from the external components and easily transfers it to the shaft. The hard core can be seen at the head marking



Hexagon blade with additional hexagon bolster



Tempered blade

- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel for hardness, elasticity and resistance to wear
- > Blade fully tempered for a long service life
- > Blade injected as a positive fit into the plastic core and matt chrome-plated

Precision-made blade tip
Ensures optimum power transfer onto the screw head



3C-SCREWDRIVER

2150 3C-SCREWDRIVER

for slotted head screws


- > Acc. to DIN ISO 2380-2, blade tip acc. to DIN ISO 2380-1 Form A
 - > 3-component handles Power-Grip³ with hanging hole
 - > Ergonomic handle design enables precise and fatigue-free working
 - > Positive-fit joint of handle and blade for optimum transmission of force
 - > Type of drive marked at end of the handle
 - > Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- * Length not standardised



| mm | mm | mm | * | mm | Ø | kg | Code | No. |
|------|-----|-----|---|-----|-----|-------|---------|-------------|
| 3.0 | 0.5 | 80 | * | 165 | 3,0 | 0.039 | 6679270 | 2150 3 |
| 3.5 | 0.6 | 75 | | 160 | 3,5 | 0.055 | 2822644 | 2150 3,5 |
| 4.0 | 0.8 | 100 | | 185 | 4,0 | 0.061 | 6679350 | 2150 4 |
| 4.5 | 0.8 | 90 | * | 190 | 4,0 | 0.100 | 2822652 | 2150 4,5 |
| 5.5 | 1.0 | 100 | | 200 | 5,0 | 0.093 | 6679430 | 2150 5,5 |
| 6.5 | 1.2 | 150 | | 260 | 6,0 | 0.128 | 6679510 | 2150 6,5 |
| 8.0 | 1.2 | 150 | | 270 | 7,0 | 0.170 | 6679780 | 2150 8 |
| 8.0 | 1.6 | 175 | | 295 | 7,0 | 0.222 | 2822660 | 2150 8-175 |
| 10.0 | 1.6 | 200 | | 320 | 8,0 | 0.203 | 6679860 | 2150 10 |
| 10.0 | 1.6 | 300 | * | 420 | 8,0 | 0.222 | 2822679 | 2150 10-300 |
| 12.0 | 2.0 | 200 | | 320 | 9,0 | 0.257 | 6679940 | 2150 12 |
| 12.0 | 2.0 | 250 | | 370 | 9,0 | 0.222 | 2822687 | 2150 12-250 |

VDE 2170

>575



2153 3C-SCREWDRIVER

for slotted head screws, stubby

- > Acc. to DIN ISO 2380-2A, blade tip acc. to DIN ISO 2380-1 Form B
- > For confined spaces
- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel



| mm | mm | mm | | mm | Ø | kg | Code | No. |
|-----|-----|----|--|----|---|-------|---------|----------|
| 4.0 | 0.8 | 25 | | 81 | | 0.031 | 1531174 | 2153 4 |
| 5.5 | 1.0 | 25 | | 81 | | 0.036 | 1482432 | 2153 5,5 |
| 6.5 | 1.2 | 25 | | 81 | | 0.039 | 1531182 | 2153 6,5 |
| 8.0 | 1.2 | 25 | | 81 | | 0.044 | 1531190 | 2153 8 |

2150 3C-SCREWDRIVER

for slotted head screws, special lengths

- > Acc. to DIN ISO 2380-2, blade tip acc. to DIN ISO 2380-1 Form B
 - > 3-component handles Power-Grip³ with hanging hole
 - > Ergonomic handle design enables precise and fatigue-free working
 - > Positive-fit joint of handle and blade for optimum transmission of force
 - > Type of drive marked at end of the handle
 - > Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- * Length not standardised



| mm | mm | mm | * | mm | Ø | kg | Code | No. |
|-----|-----|-----|---|-----|-----|-------|---------|--------------|
| 2.0 | 0.4 | 60 | * | 145 | 2,0 | 0.055 | 2822695 | 2150 2-60 |
| 2.5 | 0.4 | 75 | | 160 | 2,5 | 0.055 | 2822709 | 2150 2,5-75 |
| 3.0 | 0.5 | 150 | * | 235 | 3,0 | 0.044 | 6680280 | 2150 3-150 |
| 3.0 | 0.5 | 200 | * | 285 | 3,0 | 0.055 | 2822717 | 2150 3-200 |
| 3.5 | 0.6 | 100 | | 185 | 3,5 | 0.055 | 2822725 | 2150 3,5-100 |
| 3.5 | 0.6 | 125 | | 210 | 3,5 | 0.055 | 2822733 | 2150 3,5-125 |
| 3.5 | 0.6 | 200 | * | 285 | 3,5 | 0.055 | 2822741 | 2150 3,5-200 |
| 4.0 | 0.8 | 150 | * | 235 | 4,0 | 0.069 | 6680360 | 2150 4-150 |
| 4.0 | 0.8 | 200 | * | 285 | 4,0 | 0.055 | 2822768 | 2150 4-200 |
| 4.0 | 0.8 | 300 | * | 385 | 4,0 | 0.055 | 2822776 | 2150 4-300 |
| 5.5 | 1.0 | 125 | | 225 | 5,5 | 0.100 | 2822784 | 2150 5,5-125 |
| 5.5 | 1.0 | 150 | | 250 | 5,5 | 0.104 | 6680520 | 2150 5,5-150 |
| 5.5 | 1.0 | 200 | * | 300 | 5,5 | 0.100 | 2822792 | 2150 5,5-200 |
| 5.5 | 1.0 | 300 | * | 400 | 5,5 | 0.100 | 2822806 | 2150 5,5-300 |
| 6.0 | 1.2 | 100 | * | 210 | 6,0 | 0.140 | 2822814 | 2150 6-100 |
| 6.5 | 1.2 | 200 | * | 310 | 6,0 | 0.152 | 6680870 | 2150 6,5-200 |

2160 PH 3C-SCREWDRIVER

for cross-head screws PH

- > Acc. to DIN ISO 8764, tip acc. to DIN ISO 8764-1 PH
 - > 3-component handles Power-Grip³ with hanging hole
 - > Ergonomic handle design enables precise and fatigue-free working
 - > Positive-fit joint of handle and blade for optimum transmission of force
 - > Type of drive marked at end of the handle
 - > Size 3 and 4 blade with hexagon bolster
 - > Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- * not standardised



| PH | M | mm | * | mm | kg | Code | No. |
|----|-----------|-----|---|-----|-------|---------|---------------|
| 0 | M1,6 - M2 | 60 | | 145 | 0.302 | 6683110 | 2160 PH 0 |
| 0 | M1,6 - M2 | 100 | * | 185 | 0.055 | 2824043 | 2160 PH 0-100 |
| 1 | M2 - M3 | 80 | | 180 | 0.080 | 6683380 | 2160 PH 1 |
| 1 | M2 - M3 | 100 | * | 200 | 0.100 | 2824051 | 2160 PH 1-100 |
| 1 | M2 - M3 | 200 | | 300 | 0.166 | 6683700 | 2160 PH 1-200 |
| 2 | M3,5 - M5 | 100 | | 210 | 0.119 | 6683460 | 2160 PH 2 |
| 2 | M3,5 - M5 | 150 | * | 260 | 0.140 | 2824078 | 2160 PH 2-150 |
| 2 | M3,5 - M5 | 200 | | 310 | 0.164 | 6683890 | 2160 PH 2-200 |
| 3 | M5,5 - M7 | 150 | | 270 | 0.192 | 6683540 | 2160 PH 3 |
| 4 | M8 - M10 | 200 | | 320 | 0.274 | 6683620 | 2160 PH 4 |

2161 PH 3C-SCREWDRIVER

for cross-head screws PH, stubby

- > Acc. to DIN ISO 8764, tip acc. to DIN ISO 8764-1 PH
- > For confined spaces
- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel



| PH | M | mm | mm | kg | Code | No. |
|----|-----------|----|----|-------|---------|-----------|
| 1 | M2 - M3 | 25 | 81 | 0.033 | 1482440 | 2161 PH 1 |
| 2 | M3,5 - M5 | 25 | 81 | 0.036 | 1531204 | 2161 PH 2 |

2161 PZ 3C-SCREWDRIVER

for cross-head screws Pozi PZ, stubby

- > Acc. to DIN ISO 8764, tip acc. to DIN ISO 8764-1 PZ
- > For confined spaces
- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel



| PZ | M | mm | mm | kg | Code | No. |
|----|-----------|----|----|-------|---------|-----------|
| 1 | M2 - M3 | 25 | 81 | 0.032 | 1550608 | 2161 PZ 1 |
| 2 | M3,5 - M5 | 25 | 81 | 0.037 | 1550616 | 2161 PZ 2 |

2163 K 3C-SCREWDRIVER

for in-hex screws, with ball end

- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Working angle approx. 25° in each direction
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel



| mm | mm | mm | kg | Code | No. |
|----|-----|-----|-------|---------|-----------|
| 2 | 100 | 185 | 0.040 | 1828746 | 2163 K 2 |
| 3 | 100 | 185 | 0.045 | 6684430 | 2163 K 3 |
| 4 | 100 | 185 | 0.068 | 6684510 | 2163 K 4 |
| 5 | 100 | 200 | 0.100 | 6684780 | 2163 K 5 |
| 6 | 125 | 235 | 0.139 | 6684860 | 2163 K 6 |
| 8 | 150 | 270 | 0.230 | 6684940 | 2163 K 8 |
| 10 | 150 | 270 | 0.285 | 6685080 | 2163 K 10 |
| 12 | 150 | 270 | 0.369 | 6685160 | 2163 K 12 |

2160 PZ 3C-SCREWDRIVER

for cross-head screws Pozi PZ

- > Acc. to DIN ISO 8764, tip acc. to DIN ISO 8764-1 PZ
- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Size 3 and 4 blade with hexagon bolster
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel

* not standardised




| PZ | M | mm | mm | kg | Code | No. |
|----|-----------|-----|-------|-------|---------|---------------|
| 0 | M1,6 - M2 | 60 | 145 | 0.038 | 6683970 | 2160 PZ 0 |
| 1 | M2 - M3 | 80 | 180 | 0.079 | 6684000 | 2160 PZ 1 |
| 1 | M2 - M3 | 300 | * 400 | 0.100 | 2824086 | 2160 PZ 1-300 |
| 2 | M3,5 - M5 | 100 | 210 | 0.119 | 6684190 | 2160 PZ 2 |
| 2 | M3,5 - M5 | 300 | * 410 | 0.140 | 2824094 | 2160 PZ 2-300 |
| 3 | M5,5 - M7 | 150 | 270 | 0.189 | 6684270 | 2160 PZ 3 |
| 4 | M8 - M10 | 200 | 320 | 0.273 | 6684350 | 2160 PZ 4 |

2163 TX 3C-SCREWDRIVER

for recessed TORX[®] head screws

- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- > TORX[®] = reg. trademark of Acument Intellectual Properties, LLC. USA



| | M | mm | mm | mm | kg | Code | No. |
|-----|-----------|------|-----|-----|-------|---------|-------------|
| T5 | M1,8 | 1,42 | 60 | 145 | 0.037 | 1616471 | 2163 TX T5 |
| T6 | M2 | 1,69 | 60 | 145 | 0.029 | 6685400 | 2163 TX T6 |
| T7 | M2,5 | 1,99 | 60 | 145 | 0.038 | 6685590 | 2163 TX T7 |
| T8 | M2,5 | 2,31 | 60 | 145 | 0.038 | 6685670 | 2163 TX T8 |
| T9 | M3 | 2,50 | 60 | 145 | 0.038 | 6685750 | 2163 TX T9 |
| T10 | M3 - M3,5 | 2,74 | 80 | 165 | 0.039 | 6685830 | 2163 TX T10 |
| T15 | M3,5 - M4 | 3,27 | 80 | 165 | 0.054 | 6685910 | 2163 TX T15 |
| T20 | M4 - M5 | 3,86 | 100 | 185 | 0.060 | 6686050 | 2163 TX T20 |
| T25 | M4,5 - M5 | 4,43 | 100 | 200 | 0.082 | 6686130 | 2163 TX T25 |
| T27 | M4,5 - M6 | 4,99 | 115 | 215 | 0.098 | 6686210 | 2163 TX T27 |
| T30 | M6 - M7 | 5,52 | 115 | 225 | 0.123 | 6686480 | 2163 TX T30 |
| T40 | M7 - M8 | 6,65 | 130 | 240 | 0.144 | 6686560 | 2163 TX T40 |
| T45 | M8 - M10 | 7,82 | 130 | 250 | 0.176 | 6686640 | 2163 TX T45 |

2163 KTX 3C-SCREWDRIVER

for recessed TORX® screws, with ball end

- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Working angle approx. 25° in each direction
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA




| ⊕ | M | mm | mm | mm | kg | Code | No. |
|-----|-----------|------|-----|-----|-------|---------|--------------|
| T10 | M3 - M3,5 | 2,74 | 80 | 165 | 0.055 | 2824213 | 2163 KTX T10 |
| T15 | M3,5 - M4 | 3,27 | 80 | 165 | 0.055 | 2824221 | 2163 KTX T15 |
| T20 | M4 - M5 | 3,86 | 100 | 185 | 0.055 | 2824248 | 2163 KTX T20 |
| T25 | M4,5 - M5 | 4,43 | 100 | 200 | 0.100 | 2824256 | 2163 KTX T25 |
| T27 | M4,5 - M6 | 4,99 | 115 | 215 | 0.100 | 2824264 | 2163 KTX T27 |
| T30 | M6 - M7 | 5,52 | 115 | 225 | 0.140 | 2824272 | 2163 KTX T30 |
| T40 | M7 - M8 | 6,65 | 130 | 240 | 0.140 | 2824280 | 2163 KTX T40 |

2163 TXIP 3C-SCREWDRIVER

for recessed TORX PLUS® head screws

- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- > TORX PLUS® = reg. trademark of Acument Intellectual Properties, LLC. USA



| ⊕ | M | mm | mm | mm | kg | Code | No. |
|------|-----------|------|-----|-----|-------|---------|--------------|
| 6IP | M2 | 2,31 | 60 | 145 | 0.055 | 2824299 | 2163 TX 6IP |
| 7IP | - | - | 60 | 145 | 0.055 | 2824302 | 2163 TX 7IP |
| 8IP | M2,5 - M3 | 2,50 | 60 | 145 | 0.055 | 2824310 | 2163 TX 8IP |
| 9IP | - | - | 60 | 145 | 0.055 | 2824329 | 2163 TX 9IP |
| 10IP | M3 - M3,5 | 2,74 | 80 | 165 | 0.055 | 2824337 | 2163 TX 10IP |
| 15IP | M3,5 - M4 | 3,27 | 80 | 165 | 0.055 | 2824345 | 2163 TX 15IP |
| 20IP | M4 - M5 | 3,86 | 100 | 185 | 0.055 | 2824353 | 2163 TX 20IP |
| 25IP | M4,5 - M5 | 4,43 | 100 | 200 | 0.100 | 2824361 | 2163 TX 25IP |
| 27IP | M5 - M6 | 4,99 | 115 | 215 | 0.100 | 2824388 | 2163 TX 27IP |
| 30IP | M6 | 5,52 | 115 | 225 | 0.140 | 2824396 | 2163 TX 30IP |
| 40IP | M7 - M8 | 6,65 | 130 | 240 | 0.140 | 2824418 | 2163 TX 40IP |

VDE 2133

> 572



2163 TXB 3C-SCREWDRIVER

for recessed TORX® head screws with pilot


- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



| ⊕ | M | mm | mm | mm | kg | Code | No. |
|-----|-----------|------|-----|-----|-------|---------|------------------|
| T7 | M2,5 | 1,99 | 60 | 145 | 0.034 | 6677570 | 2163 TXB T7 |
| T8 | M2,5 | 2,31 | 60 | 145 | 0.038 | 6677650 | 2163 TXB T8 |
| T9 | M3 | 2,50 | 60 | 145 | 0.038 | 6677730 | 2163 TXB T9 |
| T10 | M3 - M3,5 | 2,74 | 80 | 165 | 0.039 | 6677810 | 2163 TXB T10 |
| T10 | M3 - M3,5 | 2,74 | 300 | 385 | 0.055 | 2824159 | 2163 TXB T10-300 |
| T15 | M3,5 - M4 | 3,27 | 80 | 165 | 0.054 | 6678030 | 2163 TXB T15 |
| T15 | M3,5 - M4 | 3,27 | 300 | 385 | 0.055 | 2824167 | 2163 TXB T15-300 |
| T20 | M4 - M5 | 3,86 | 100 | 185 | 0.060 | 6678110 | 2163 TXB T20 |
| T20 | M4 - M5 | 3,86 | 300 | 385 | 0.055 | 2824175 | 2163 TXB T20-300 |
| T25 | M4,5 - M5 | 4,43 | 100 | 200 | 0.082 | 6678380 | 2163 TXB T25 |
| T27 | M4,5 - M6 | 4,99 | 115 | 215 | 0.098 | 6678460 | 2163 TXB T27 |
| T30 | M6 - M7 | 5,52 | 115 | 225 | 0.123 | 6678540 | 2163 TXB T30 |
| T40 | M7 - M8 | 6,65 | 130 | 240 | 0.143 | 6678620 | 2163 TXB T40 |

2133 NUT DRIVER WITH 3C-HANDLE

- > Acc. to DIN 3125, ISO 2725-1
- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Head depth 25 mm, blade length 125 mm
- > 10 mm and larger with hexagon bolster
- > Blade from GEDORE molybdenum-vanadium-Plus steel



| mm | L ₁ | L ₂ | d | Ø | mm | kg | Code | No. |
|------|----------------|----------------|------|---|----|-------|---------|----------|
| 5.0 | 225 | 125 | 8,0 | 5 | - | 0.097 | 1746723 | 2133 5 |
| 5.5 | 225 | 125 | 8,0 | 5 | - | 0.107 | 1746731 | 2133 5,5 |
| 6.0 | 225 | 125 | 9,0 | 5 | - | 0.109 | 1746758 | 2133 6 |
| 7.0 | 235 | 125 | 11,0 | 6 | - | 0.135 | 1746766 | 2133 7 |
| 8.0 | 235 | 125 | 12,0 | 6 | - | 0.152 | 1746855 | 2133 8 |
| 9.0 | 235 | 125 | 13,0 | 6 | - | 0.168 | 1746863 | 2133 9 |
| 10.0 | 245 | 125 | 14,0 | 6 | 10 | 0.198 | 1746898 | 2133 10 |
| 11.0 | 245 | 125 | 16,0 | 8 | 13 | 0.202 | 1746901 | 2133 11 |
| 12.0 | 245 | 125 | 17,0 | 8 | 13 | 0.221 | 1746928 | 2133 12 |
| 13.0 | 245 | 125 | 18,0 | 8 | 13 | 0.225 | 1746944 | 2133 13 |



3C-SCREWDRIVER SETS


2150-2160 PH 3C-SCREWDRIVER SET


6 pieces / 10 pieces

- > Practical set composition in environmentally-friendly cardboard box
- > For slotted and cross-head screws PH
- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel




2150-2160 PH-06

| Contents |  | Code | No. |
|--------------------|---|---------|-----------------|
| ⊖ 2150 4 5,5 6,5 8 | 0.660 | 1482319 | 2150-2160 PH-06 |
| ⊕ 2160 PH 1 2 | | | |

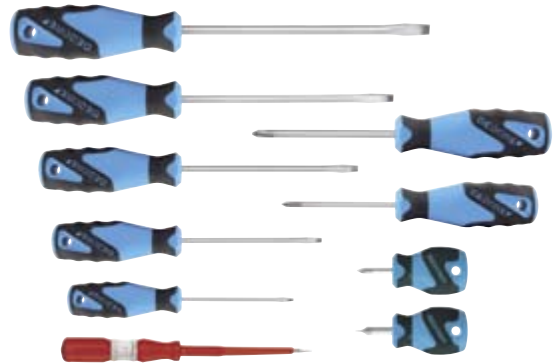


2150-2160 PH-010


| Contents |  | Code | No. |
|----------------------|---|---------|------------------|
| ⊖ 2150 3 4 5,5 6,5 8 | 0.825 | 1482343 | 2150-2160 PH-010 |
| ⊖ 2153 5,5 | | | |
| ⊕ 2160 PH 1 2 | | | |
| ⊕ 2161 PH 1 | | | |
| ⊖ 4615 3,5 | | | |

2160 PHZ-06 3C-SCREWDRIVER SET

6 pieces


- > Practical set composition in environmentally-friendly cardboard box
- > For cross-head screws PH and Pozi PZ
- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel

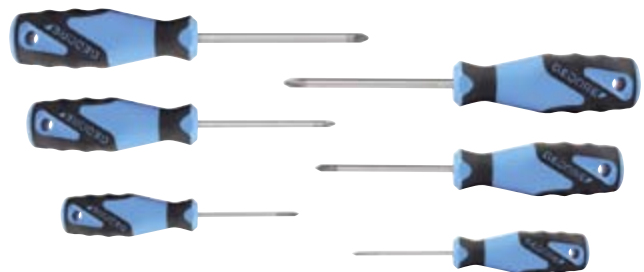

| Contents |  | Code | No. |
|-----------------|---|---------|-------------|
| ⊕ 2160 PH 0 1 2 | 0.344 | 2003589 | 2160 PHZ-06 |
| ⊕ 2160 PZ 0 1 2 | | | |


VDE 2170-2160 PH-077

>579

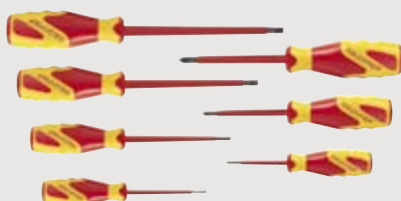

VDE 2162-2172 PM-06

>577

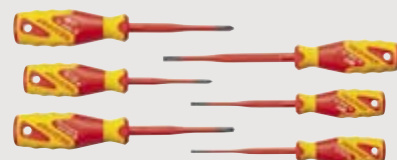

2150-2160 PZ-06 3C-SCREWDRIVER SET

6 pieces

- > Practical set composition in environmentally-friendly cardboard box
- > For slotted and cross-head screws Pozi PZ
- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel




| Contents | kg | Code | No. |
|--------------------|-------|---------|-----------------|
| ⊖ 2150 4 5,5 6,5 8 | 0.670 | 1482300 | 2150-2160 PZ-06 |
| ⊕ 2160 PZ 1 2 | | | |

2163 TXB-05 3C-SCREWDRIVER SET

5 pieces

- > Practical set composition in environmentally-friendly cardboard box
- > For recessed TORX[®] head screws with pilot
- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- > TORX[®] = reg. trademark of Acument Intellectual Properties, LLC. USA

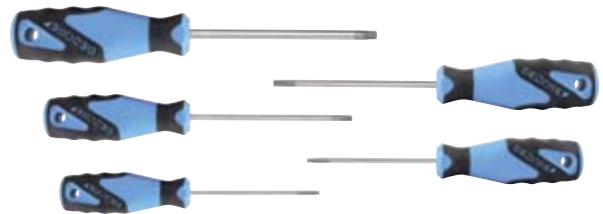


| Contents | kg | Code | No. |
|--------------------------------|-------|---------|-------------|
| ⊕ 2163 TXB T10 T15 T20 T25 T30 | 0.440 | 1616617 | 2163 TXB-05 |


2163 TX 3C-SCREWDRIVER SET

5 pieces / 10 pieces

- > Practical set composition in environmentally-friendly cardboard box
- > For recessed TORX[®] head screws
- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- > TORX[®] = reg. trademark of Acument Intellectual Properties, LLC. USA

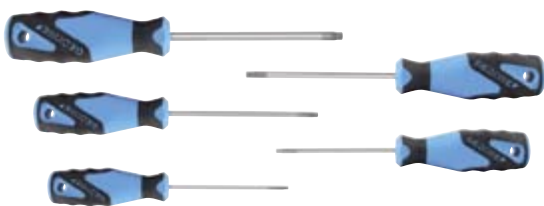

2163 TX-05

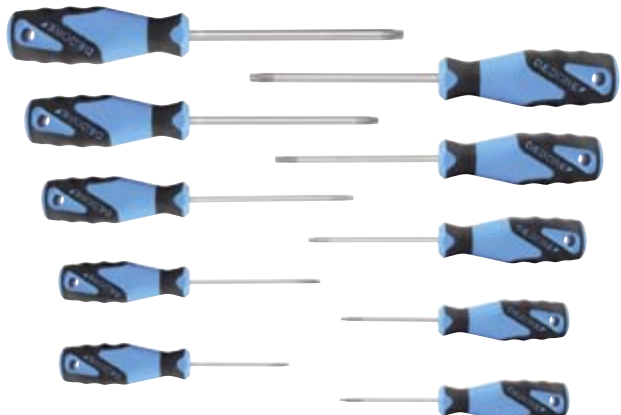

2163 TX-010

| Contents | kg | Code | No. |
|--------------------------------|-------|---------|------------|
| ⊕ 2163 BTX T10 T15 T20 T25 T30 | 0.435 | 1482327 | 2163 TX-05 |

| Contents | kg | Code | No. |
|---|-------|---------|-------------|
| ⊕ 2163 BTX T7 T8 T9 T10 T15 T20 T25 T27 T30 T40 | 0.740 | 1482335 | 2163 TX-010 |



3C-SCREWDRIVER WITH STRIKING CAP

2154SK 3C-SCREWDRIVER WITH STRIKING CAP

for slotted head screws

- > Acc. to DIN ISO 2380-2, blade tip acc. to DIN ISO 2380-1 Form A
- > 3-component handles Power-Grip³ with striking cap
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Hexagon blade with additional hexagon bolster
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- * Length not standardised



| ⊖ mm | mm | mm | mm | mm | kg | Code | No. |
|------|-----|-----|-------|----|-------|---------|----------------|
| 3.5 | 0.6 | 75 | 180 | 8 | 0.086 | 1845209 | 2154SK 3,5 |
| 4.5 | 0.8 | 75 | * 180 | 8 | 0.090 | 1845217 | 2154SK 4,5 |
| 5.5 | 1.0 | 100 | 205 | 8 | 0.092 | 1845225 | 2154SK 5,5 |
| 6.5 | 1.2 | 125 | 230 | 10 | 0.154 | 1845233 | 2154SK 6,5 |
| 6.5 | 1.2 | 150 | 255 | 10 | 0.229 | 2824108 | 2154SK 6,5-150 |
| 7.0 | 1.2 | 125 | 230 | 10 | 0.229 | 2824116 | 2154SK 7 |
| 8.0 | 1.2 | 150 | 270 | 13 | 0.178 | 1845241 | 2154SK 8 |
| 8.0 | 1.6 | 175 | 295 | 13 | 0.229 | 2824124 | 2154SK 8-175 |
| 10.0 | 1.6 | 200 | 320 | 13 | 0.214 | 1845268 | 2154SK 10 |
| 10.0 | 1.6 | 300 | 420 | 13 | 0.229 | 2824132 | 2154SK 10-300 |
| 12.0 | 2.0 | 200 | 320 | 16 | 0.260 | 1845276 | 2154SK 12 |
| 12.0 | 2.0 | 250 | 370 | 16 | 0.229 | 2824140 | 2154SK 12-250 |
| 14.0 | 2.5 | 250 | 370 | 16 | 0.324 | 1845284 | 2154SK 14 |

2160SK PZ 3C-SCREWDRIVER WITH STRIKING CAP

for cross-head screws Pozi PZ

- > Acc. to DIN ISO 8764, tip acc. to DIN ISO 8764-1 PZ
- > 3-component handles Power-Grip³ with striking cap
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Hexagon blade with additional hexagon bolster
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel



| ⊕ PZ | M | mm | mm | mm | kg | Code | No. |
|------|-----------|-----|-----|----|-------|---------|-------------|
| 1 | M2 - M3 | 80 | 185 | 8 | 0.086 | 1845330 | 2160SK PZ 1 |
| 2 | M3,5 - M5 | 100 | 205 | 10 | 0.148 | 1845349 | 2160SK PZ 2 |
| 3 | M5,5 - M7 | 150 | 270 | 13 | 0.206 | 1845357 | 2160SK PZ 3 |

2160SK PH 3C-SCREWDRIVER WITH STRIKING CAP

for cross-head screws PH

- > Acc. to DIN ISO 8764, tip acc. to DIN ISO 8764-1 PH
- > 3-component handles Power-Grip³ with striking cap
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Hexagon blade with additional hexagon bolster
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel



| ⊕ PH | M | mm | mm | mm | kg | Code | No. |
|------|-----------|-----|-----|----|-------|---------|-------------|
| 1 | M2 - M3 | 80 | 185 | 8 | 0.086 | 1845292 | 2160SK PH 1 |
| 2 | M3,5 - M5 | 100 | 205 | 10 | 0.148 | 1845306 | 2160SK PH 2 |
| 3 | M5,5 - M7 | 150 | 270 | 13 | 0.204 | 1845314 | 2160SK PH 3 |
| 4 | M8 - M10 | 200 | 320 | 16 | 0.292 | 1845322 | 2160SK PH 4 |

SK 2154 PH-06 3C-SCREWDRIVER SET WITH STRIKING CAP

6 pieces

- > Practical set composition in environmentally-friendly cardboard box
- > For firmly seated slotted and cross-head screws PH
- > Hexagon blade with additional hexagon bolster
- > 3-component handles Power-Grip³ with striking cap
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel



| Contents | kg | Code | No. |
|------------------------|-------|---------|---------------|
| ⊖ 2154SK 4,5 5,5 6,5 8 | 0.880 | 1878743 | SK 2154 PH-06 |
| ⊕ 2160SK PH 1 2 | | | |

SCREWDRIVER WITH WOODEN HANDLE

147 SCREWDRIVER

for slotted head screws

- > Similar to DIN ISO 2380-2 Row B+C, blade tip acc. to DIN ISO 2380-1 Form A
- > Blade tanged right through the handle, chrome-plated
- > GEDORE vanadium steel 50CrV4
- > Hardwood handle, clear varnished with leather cap
- > Hexagon bolster for higher transmission of force



| mm | mm | mm | mm | mm | kg | Code | No. |
|------|-----|-----|-----|----|-------|---------|---------|
| 3.5 | 0.6 | 75 | 170 | 6 | 0.055 | 6413830 | 147 3,5 |
| 4.5 | 0.8 | 90 | 185 | 6 | 0.059 | 6413910 | 147 4,5 |
| 5.5 | 1.0 | 100 | 200 | 8 | 0.073 | 6414050 | 147 5,5 |
| 7.0 | 1.2 | 125 | 235 | 10 | 0.112 | 6414130 | 147 7 |
| 9.0 | 1.4 | 150 | 270 | 12 | 0.166 | 6414210 | 147 9 |
| 10.0 | 1.6 | 175 | 300 | 12 | 0.192 | 6414480 | 147 10 |
| 12.0 | 2.0 | 200 | 330 | 13 | 0.250 | 6414560 | 147 12 |

148 SCREWDRIVER

for slotted head screws

- > Similar to DIN ISO 2380-2 Row B+C, blade tip acc. to DIN ISO 2380-1 Form A
- > Hexagon blade with forged bolster for higher transmission of force
- > Blade tanged right through the handle, chrome-plated
- > GEDORE vanadium steel 50CrV4
- > Hardwood handle, clear varnished with leather cap



| mm | mm | mm | mm | mm | kg | Code | No. |
|------|-----|-----|-----|----|-------|---------|---------|
| 5.5 | 0.8 | 100 | 200 | 6 | 0.083 | 6415020 | 148 5,5 |
| 7.0 | 1.0 | 125 | 230 | 7 | 0.123 | 6415100 | 148 7 |
| 8.0 | 1.2 | 150 | 270 | 8 | 0.174 | 6415290 | 148 8 |
| 10.0 | 1.6 | 175 | 300 | 8 | 0.233 | 6415370 | 148 10 |
| 12.0 | 2.0 | 200 | 330 | 12 | 0.381 | 6415450 | 148 12 |
| 14.0 | 2.5 | 250 | 390 | 12 | 0.478 | 6415530 | 148 14 |

162 SCREWDRIVER

for cross-head screws PH

- > Similar to DIN ISO 8764-2, tip acc. to DIN ISO 8764-1 PH
- > Blade tanged right through the handle, chrome-plated
- > GEDORE vanadium steel 50CrV4
- > Hardwood handle, clear varnished with leather cap
- > Hexagon bolster for higher transmission of force



| PH | M | mm | mm | mm | kg | Code | No. |
|----|-------------|-----|-----|----|-------|---------|-------|
| 1 | M 2 - M 3 | 80 | 180 | 6 | 0.058 | 6429400 | 162 1 |
| 2 | M 3,5 - M 5 | 100 | 210 | 10 | 0.096 | 6429590 | 162 2 |
| 3 | M 6 | 150 | 275 | 12 | 0.172 | 6429670 | 162 3 |
| 4 | M 8 - M 10 | 200 | 340 | 17 | 0.325 | 6429750 | 162 4 |

147-04 SCREWDRIVER SET

4 pieces

- > Work-orientated assortment packed in environmentally-friendly cardboard box
- > For slotted head screws
- > Blade tanged right through the handle, chrome-plated
- > GEDORE vanadium steel 50CrV4
- > Hardwood handle, clear varnished with leather cap
- > Hexagon bolster for higher transmission of force



| Contents | kg | Code | No. |
|----------------|-------|---------|--------|
| 147 5,5 7 9 10 | 0.585 | 6422820 | 147-04 |

147-162-05 SCREWDRIVER SET

5 pieces

- > Work-orientated assortment packed in environmentally-friendly cardboard box
- > For slotted head and cross-head screws PH
- > Blade tanged right through the handle, chrome-plated
- > GEDORE vanadium steel 50CrV4
- > Hardwood handle, clear varnished with leather cap
- > Hexagon bolster for higher transmission of force



| Contents | kg | Code | No. |
|-------------|-------|---------|------------|
| 147 5,5 7 9 | 0.535 | 6423120 | 147-162-05 |
| 162 1 2 | | | |

ELECTRONIC SCREWDRIVER

171 IS ELECTRONIC SCREWDRIVER

for slotted head screws

- › Blade in high-alloy chrome-vanadium-molybdenum steel, chrome-plated
- › Tip additionally coated for highest precision and corrosion protection
- › 2-component-handle in ergonomic design
- › Pivoting end cap with micro anti-slip surface
- › Colour coding of the drive type



| mm | mm | mm | Ø | kg | Code | No. |
|-----|-----|-----|-----|-------|---------|------------|
| 1.2 | 60 | 155 | 2,5 | 0.017 | 1845004 | 171 IS 1,2 |
| 1.5 | 60 | 155 | 2,5 | 0.014 | 6436450 | 171 IS 1,5 |
| 1.8 | 60 | 155 | 2,5 | 0.017 | 1845012 | 171 IS 1,8 |
| 2.0 | 60 | 155 | 2,5 | 0.017 | 6438660 | 171 IS 2 |
| 2.5 | 75 | 170 | 2,5 | 0.020 | 1845020 | 171 IS 2,5 |
| 3.0 | 100 | 195 | 3,0 | 0.023 | 1845039 | 171 IS 3 |

165 PH ELECTRONIC SCREWDRIVER

for cross-head screws PH

- › Blade in high-alloy chrome-vanadium-molybdenum steel, chrome-plated
- › Tip additionally coated for highest precision and corrosion protection
- › 2-component-handle in ergonomic design
- › Pivoting end cap with micro anti-slip surface
- › Colour coding of the drive type



| PH | M | mm | mm | Ø | kg | Code | No. |
|-----|-----------|----|-----|-----|-------|---------|------------|
| 000 | | 60 | 155 | 2,5 | 0.018 | 1845047 | 165 PH 000 |
| 00 | | 60 | 155 | 2,5 | 0.016 | 6442770 | 165 PH 00 |
| 0 | M1,6 - M2 | 60 | 155 | 3,0 | 0.018 | 6442930 | 165 PH 0 |
| 1 | M2-M3 | 80 | 175 | 4,5 | 0.031 | 1845055 | 165 PH 1 |

165 TX ELECTRONIC SCREWDRIVER

for recessed TORX® head screws

- › Blade in high-alloy chrome-vanadium-molybdenum steel, chrome-plated
- › Tip additionally coated for highest precision and corrosion protection
- › 2-component-handle in ergonomic design
- › Pivoting end cap with micro anti-slip surface
- › Colour coding of the drive type
- › TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



| T | M | mm | mm | mm | Ø | kg | Code | No. |
|-----|-------------|------|----|-----|-----|-------|---------|------------|
| T3 | M1,2 - M1,4 | 1,13 | 60 | 155 | 2,5 | 0.016 | 1845098 | 165 TX T3 |
| T4 | M1,4 | 1,29 | 60 | 155 | 2,5 | 0.016 | 1845101 | 165 TX T4 |
| T5 | M1,8 | 1,42 | 60 | 155 | 2,5 | 0.017 | 1845128 | 165 TX T5 |
| T6 | M2 | 1,69 | 60 | 155 | 3,0 | 0.019 | 1845136 | 165 TX T6 |
| T7 | M2,5 | 1,99 | 60 | 155 | 3,0 | 0.019 | 1845144 | 165 TX T7 |
| T8 | M2,5 | 2,31 | 60 | 155 | 3,0 | 0.019 | 1845152 | 165 TX T8 |
| T9 | M3 | 2,50 | 60 | 155 | 3,0 | 0.019 | 1845160 | 165 TX T9 |
| T10 | M3 - M3,5 | 2,74 | 60 | 155 | 3,0 | 0.020 | 1845179 | 165 TX T10 |
| T15 | M3,5 - M4 | 3,27 | 60 | 155 | 3,5 | 0.023 | 1845187 | 165 TX T15 |
| T20 | M4 - M5 | 3,86 | 80 | 175 | 4,0 | 0.029 | 1845195 | 165 TX T20 |

164 IN ELECTRONIC SCREWDRIVER

for in-hex screws

- › Blade in high-alloy chrome-vanadium-molybdenum steel, chrome-plated
- › Tip additionally coated for highest precision and corrosion protection
- › 2-component-handle in ergonomic design
- › Pivoting end cap with micro anti-slip surface
- › Colour coding of the drive type



| mm | mm | mm | Ø | kg | Code | No. |
|-----|----|-----|-----|-------|---------|------------|
| 0,7 | 60 | 155 | 2,5 | 0.018 | 1845063 | 164 IN 0,7 |
| 0,9 | 60 | 155 | 2,5 | 0.018 | 1845071 | 164 IN 0,9 |
| 1,3 | 60 | 155 | 2,5 | 0.017 | 6443150 | 164 IN 1,3 |
| 1,5 | 60 | 155 | 2,5 | 0.017 | 6443230 | 164 IN 1,5 |
| 2 | 60 | 155 | 2,5 | 0.019 | 6443310 | 164 IN 2 |
| 2,5 | 60 | 155 | 3,0 | 0.016 | 6443580 | 164 IN 2,5 |
| 3 | 60 | 155 | 3,5 | 0.022 | 6443740 | 164 IN 3 |

165-171-06

ELECTRONIC SCREWDRIVER SET

6 pieces

- > For slotted head and cross-head screws PH
- > Blade in high-alloy chrome-vanadium-molybdenum steel, chrome-plated
- > Tip additionally coated for highest precision and corrosion protection
- > 2-component-handle in ergonomic design
- > Pivoting end cap with micro anti-slip surface
- > Colour coding of the drive type
- > In plastic case
- > With GEDORE Check-Tool-System: 2-colour foam insert to check that the set is complete




165 TX-06


ELECTRONIC SCREWDRIVER SET

6 pieces

- > For recessed TORX® head screws
- > Blade in high-alloy chrome-vanadium-molybdenum steel, chrome-plated
- > Tip additionally coated for highest precision and corrosion protection
- > 2-component-handle in ergonomic design
- > Pivoting end cap with micro anti-slip surface
- > Colour coding of the drive type
- > In plastic case
- > With GEDORE Check-Tool-System: 2-colour foam insert to check that the set is complete
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



| Contents |  | Code | No. |
|----------------------|---|---------|------------|
| ⊕ 165 PH 000 00 0 | 0.385 | 1902849 | 165-171-06 |
| ⊖ 171 IS 1,2 1,8 2,5 | | | |


| Contents |  | Code | No. |
|-----------------------------|---|---------|-----------|
| ⊕ 165 TX T5 T6 T7 T8 T9 T10 | 0.415 | 1902857 | 165 TX-06 |


1021

ELECTRONIC SCREWDRIVER SET

7 pieces

- > In plastic case
- > Dimensions: 275 x 150 x 42 mm


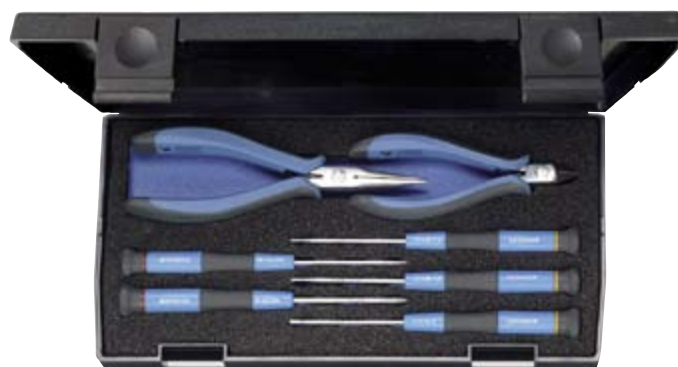


| Contents |  | Code | No. |
|--------------------|---|---------|------|
| ⊖ 171 IS 1,2 1,5 2 | 0.624 | 6601830 | 1021 |
| ⊕ 165 PH 00 0 | | | |
| 8305-2 | | | |
| 8306-5 | | | |



2GT-HANDLE


> 2-component wing handle for high torque level when loosening or tightening. The lengthened wing provides an optimum contact surface for the palm of one's hand. It thus easily transfers considerable forces in a relaxed hand's position.

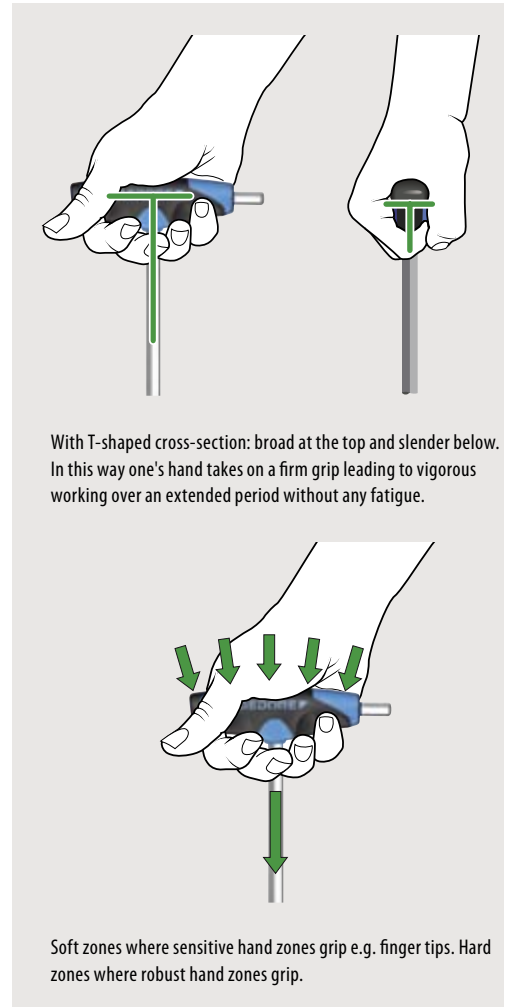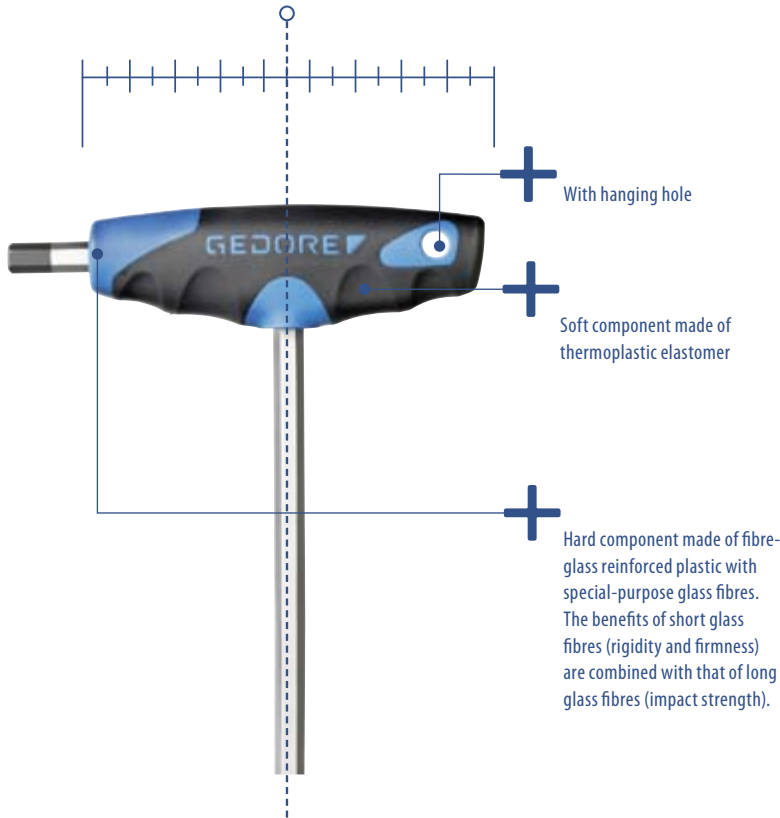

2142 T (MM) HEXAGON ALLEN KEY WITH 2GT-HANDLE

for in-hex screws

- > With hanging hole
- > GEDORE vanadium steel 61CrSIV5, chromated

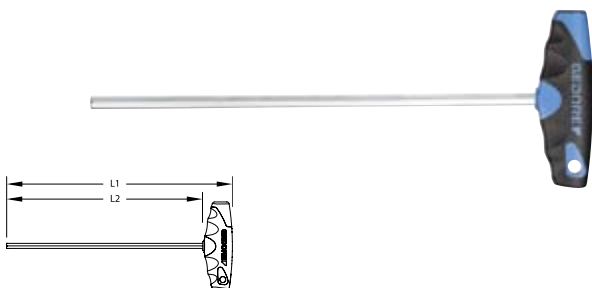


| ● mm | L ₁ | L ₂ | ⚖ | Code | No. |
|------|----------------|----------------|-------|---------|----------|
| 2 | 152 | 125 | 0.061 | 2647257 | 2142T2 |
| 2,5 | 152 | 125 | 0.091 | 2647265 | 2142T2,5 |
| 3 | 152 | 125 | 0.071 | 2647273 | 2142T3 |
| 4 | 152 | 125 | 0.080 | 2647281 | 2142T4 |
| 5 | 177 | 150 | 0.100 | 2647303 | 2142T5 |
| 6 | 188 | 150 | 0.140 | 2647311 | 2142T6 |
| 7 | 213 | 175 | 0.160 | 2681439 | 2142T7 |
| 8 | 213 | 175 | 0.221 | 2647338 | 2142T8 |
| 10 | 238 | 200 | 0.201 | 2647346 | 2142T10 |

2142 T (AF) HEXAGON ALLEN KEY WITH 2GT-HANDLE

for in-hex screws

- > With hanging hole
- > GEDORE vanadium steel 61CrSIV5, chromated

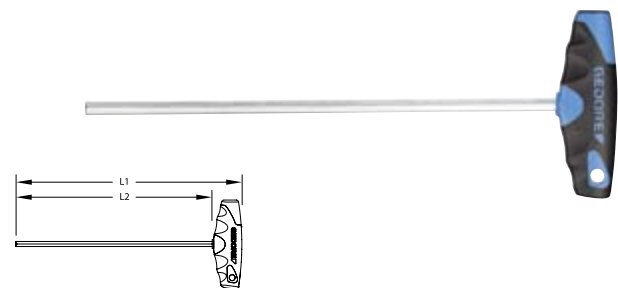


| ● AF | L ₁ | L ₂ | ⚖ | Code | No. |
|------|----------------|----------------|-------|---------|-------------|
| 1/8 | 152 | 125 | 0.101 | 2647354 | 2142T1/8AF |
| 5/32 | 152 | 125 | 0.121 | 2647362 | 2142T5/32AF |
| 3/16 | 177 | 150 | 0.100 | 2647370 | 2142T3/16AF |
| 1/4 | 213 | 175 | 0.140 | 2647389 | 2142T1/4AF |
| 5/16 | 213 | 175 | 0.221 | 2647397 | 2142T5/16AF |
| 3/8 | 238 | 200 | 0.201 | 2647400 | 2142T3/8AF |

DT 2142

HEXAGON ALLEN KEY WITH 2CT-HANDLE

for in-hex screws

- > With hanging hole
- > With 2 hexagons, same size each end
- > GEDORE vanadium steel 61CrSiV5, chromated




| mm | L ₁ | L ₂ | L ₃ | g | Code | No. |
|-----|----------------|----------------|----------------|-------|---------|-------------|
| 2 | 152 | 125 | 15 | 0.091 | 2488914 | DT 2142 2 |
| 2,5 | 152 | 125 | 15 | 0.071 | 2498596 | DT 2142 2,5 |
| 3 | 152 | 125 | 15 | 0.040 | 2498618 | DT 2142 3 |
| 4 | 152 | 125 | 15 | 0.080 | 2498626 | DT 2142 4 |
| 5 | 177 | 150 | 20 | 0.100 | 2502631 | DT 2142 5 |
| 6 | 188 | 150 | 20 | 0.120 | 2502658 | DT 2142 6 |
| 7 | 213 | 175 | 25 | 0.251 | 2505487 | DT 2142 7 |
| 8 | 213 | 175 | 25 | 0.180 | 2507447 | DT 2142 8 |
| 10 | 238 | 200 | 25 | 0.280 | 2507471 | DT 2142 10 |

2142 TX

WRENCH KEY WITH 2CT-HANDLE

for recessed TORX® screws

- > With hanging hole
- > Chrome-vanadium steel, blade chrome-plated, tip gun-metal finish
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



| mm | M | mm | L ₁ | L ₂ | g | Code | No. |
|-----|-----------|------|----------------|----------------|-------|---------|-------------|
| T5 | M1,8 | 1,42 | 152 | 125 | 0.081 | 2509393 | 2142 TX T5 |
| T6 | M2 | 1,70 | 152 | 125 | 0.081 | 2511622 | 2142 TX T6 |
| T7 | M2,5 | 1,99 | 152 | 125 | 0.081 | 2511657 | 2142 TX T7 |
| T8 | M2,5 | 2,31 | 152 | 125 | 0.051 | 2513072 | 2142 TX T8 |
| T9 | M3 | 2,50 | 152 | 125 | 0.071 | 2513102 | 2142 TX T9 |
| T10 | M3 - M3,5 | 2,74 | 152 | 125 | 0.061 | 2513749 | 2142 TX T10 |
| T15 | M3,5 - M4 | 3,27 | 152 | 125 | 0.091 | 2516934 | 2142 TX T15 |
| T20 | M4 - M5 | 3,86 | 152 | 125 | 0.081 | 2519062 | 2142 TX T20 |
| T25 | M4,5 - M5 | 4,43 | 177 | 150 | 0.091 | 2519186 | 2142 TX T25 |
| T27 | M4,5 - M6 | 4,99 | 177 | 150 | 0.100 | 2521571 | 2142 TX T27 |
| T30 | M6 - M7 | 5,52 | 188 | 150 | 0.100 | 2521598 | 2142 TX T30 |
| T40 | M7 - M8 | 6,65 | 213 | 175 | 0.140 | 2521601 | 2142 TX T40 |
| T45 | M8 - M10 | 7,82 | 213 | 175 | 0.160 | 2521636 | 2142 TX T45 |
| T50 | M10 | 8,83 | 238 | 200 | 0.180 | 2521644 | 2142 TX T50 |

1500 CT2-DT 2142





>110

DT 2143 KTX

CRANKED SOCKET KEY WITH 2CT-HANDLE

for recessed TORX® screws


- > Working angle approx. 25°
- > With hanging hole
- > Chrome-vanadium steel, blades chrome-plated, tip phosphated
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

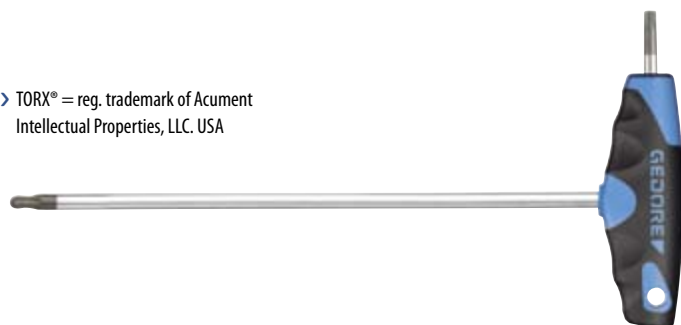

| mm | M | mm | L ₁ | L ₂ | L ₃ | g | Code | No. |
|-----|-----------|------|----------------|----------------|----------------|-------|---------|-----------------|
| T10 | M3 - M3,5 | 2,74 | 152 | 125 | 15 | 0.091 | 2647486 | DT 2143 KTX T10 |
| T15 | M3,5 - M4 | 3,27 | 152 | 125 | 15 | 0.081 | 2647494 | DT 2143 KTX T15 |
| T20 | M4 - M5 | 3,86 | 152 | 125 | 15 | 0.071 | 2647508 | DT 2143 KTX T20 |
| T25 | M4,5 - M5 | 4,43 | 177 | 150 | 20 | 0.121 | 2647516 | DT 2143 KTX T25 |
| T27 | M4,5 - M6 | 4,99 | 177 | 150 | 20 | 0.120 | 2647524 | DT 2143 KTX T27 |
| T30 | M6 - M7 | 5,52 | 188 | 150 | 25 | 0.140 | 2647532 | DT 2143 KTX T30 |
| T40 | M7 - M8 | 6,65 | 213 | 175 | 25 | 0.180 | 2647540 | DT 2143 KTX T40 |

2133 T NUT DRIVER WITH 2GT-HANDLE



- > With hanging hole
- > Head depth 25 mm
- > GEDORE vanadium steel 31CrV3, matt chrome-plated

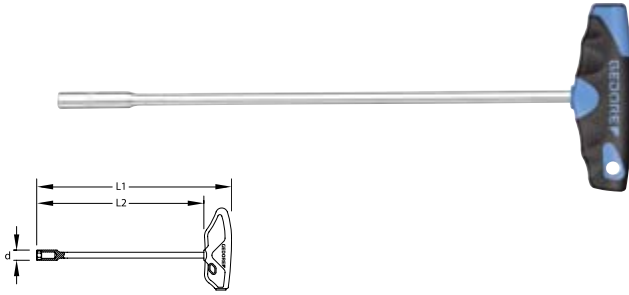

| Ø mm | L ₁ | L ₂ | d | | Code | No. |
|------|----------------|----------------|----|-------|---------|------------|
| 5.5 | 257 | 230 | 8 | 0.101 | 2647621 | 2133 T 5,5 |
| 6.0 | 257 | 230 | 9 | 0.101 | 2647648 | 2133 T 6 |
| 7.0 | 268 | 230 | 11 | 0.101 | 2647656 | 2133 T 7 |
| 8.0 | 268 | 230 | 12 | 0.180 | 2647664 | 2133 T 8 |
| 9.0 | 268 | 230 | 13 | 0.180 | 2647672 | 2133 T 9 |
| 10.0 | 268 | 230 | 14 | 0.180 | 2647680 | 2133 T 10 |
| 11.0 | 268 | 230 | 16 | 0.200 | 2647699 | 2133 T 11 |
| 12.0 | 268 | 230 | 17 | 0.220 | 2647702 | 2133 T 12 |
| 13.0 | 268 | 230 | 18 | 0.240 | 2647710 | 2133 T 13 |

42 DKEL - THE FIRST WITH TWO BALL ENDS

- > Two ball ends and an extra short angle side for working optimally in confined spaces
- > Positive or negative inclination produces a possible 50° angle of approach (+/- 25°) to the screw axis
- > Projecting hindrances can be got round with the two ball ends - rapid work is the outcome
- > The GEDORE vanadium steel 59CRV4 with its high manganese share ensures the screwdriver has that strength needed

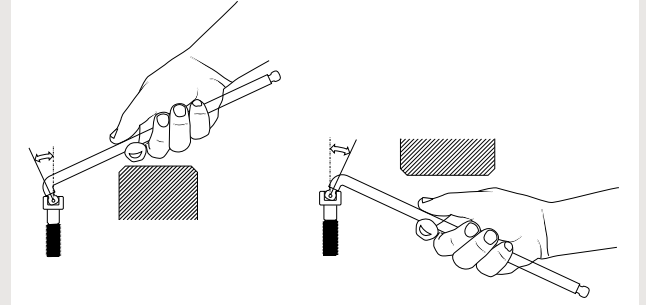

DTT 42 HEXAGON ALLEN KEY

for in-hex screws

- > With 3 hexagons, same size each end
- > T-handle fixed




| Ø mm | L ₁ | L ₂ | L ₃ | Ø | | Code | No. |
|------|----------------|----------------|----------------|------|-------|---------|-----------|
| 3 | 150 | 75 | 30 | 5.0 | 0.042 | 1669540 | DTT 42 3 |
| 4 | 180 | 90 | 35 | 6.0 | 0.064 | 1669559 | DTT 42 4 |
| 5 | 180 | 90 | 35 | 7.0 | 0.092 | 1669567 | DTT 42 5 |
| 6 | 210 | 105 | 40 | 8.0 | 0.134 | 1669575 | DTT 42 6 |
| 8 | 250 | 125 | 50 | 9.5 | 0.224 | 1669583 | DTT 42 8 |
| 10 | 300 | 150 | 60 | 12.0 | 0.418 | 1669591 | DTT 42 10 |

H 42 DKEL-88 HEXAGON ALLEN KEY SET

for in-hex screws, extra long, with double ball end

- > Particularly suitable for confined spaces in view of a double ball end and short angled side
- > Easy to use where normal hexagon allen keys would fail thanks to improved accessibility and a low profile
- > Rapid progress in work since the two ball ends allow protrusions to be gone round
- > Reduces the risk of injury to the fingers when working on flat surfaces
- > GEDORE vanadium steel 59CrV4, zinc-plated



| Contents | | Code | No. |
|---------------------------------|-------|---------|--------------|
| ● mm 42 DKEL 2 2,5 3 4 5 6 8 10 | 0.400 | 2797186 | H 42 DKEL-88 |

42 DKEL HEXAGON ALLEN KEY

for in-hex screws, extra long, with double ball end

- > Particularly suitable for confined spaces in view of a double ball end and short angled side
- > Easy to use where normal hexagon allen keys would fail thanks to improved accessibility and a low profile
- > Rapid progress in work since the two ball ends allow protrusions to be gone round
- > Reduces the risk of injury to the fingers when working on flat surfaces
- > GEDORE vanadium steel 59CrV4, zinc-plated



| mm | L ₁ | L ₂ | kg | Code | No. |
|-----|----------------|----------------|-------|---------|-------------|
| 1,5 | 89 | 7.5 | 0.003 | 2797062 | 42 DKEL 1,5 |
| 2 | 102 | 9.0 | 0.004 | 2797089 | 42 DKEL 2 |
| 2,5 | 115 | 10.0 | 0.006 | 2797097 | 42 DKEL 2,5 |
| 3 | 129 | 11.5 | 0.010 | 2797100 | 42 DKEL 3 |
| 4 | 144 | 14.5 | 0.018 | 2797119 | 42 DKEL 4 |
| 5 | 165 | 16.5 | 0.050 | 2797127 | 42 DKEL 5 |
| 6 | 186 | 19.0 | 0.060 | 2797135 | 42 DKEL 6 |
| 7 | 197 | 20.5 | 0.070 | 2797143 | 42 DKEL 7 |
| 8 | 205 | 22.0 | 0.090 | 2797151 | 42 DKEL 8 |
| 10 | 227 | 28.0 | 0.160 | 2797178 | 42 DKEL 10 |

H 42 KEL-88 HEXAGON ALLEN KEY SET

for in-hex screws, extra long, with ball end

- > In blue plastic holder (LPDE)
- > GEDORE vanadium steel 59CrV4, chromated



| Contents | kg | Code | No. |
|------------------------------|-------|---------|-------------|
| mm 42 KEL 2 2,5 3 4 5 6 8 10 | 0.415 | 1523988 | H 42 KEL-88 |

H 42 EL-88 HEXAGON ALLEN KEY SET

for in-hex screws, extra long

- > In blue plastic holder (LPDE)
- > Acc. to DIN ISO 2936
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



| Contents | kg | Code | No. |
|-----------------------------|-------|---------|------------|
| mm 42 EL 2 2,5 3 4 5 6 8 10 | 0.425 | 1505416 | H 42 EL-88 |

42 KEL HEXAGON ALLEN KEY

for in-hex screws, extra long, with ball end

- > GEDORE vanadium steel 59CrV4, chrome-plated




| mm | L ₁ | L ₂ | kg | Code | No. |
|-----|----------------|----------------|-------|---------|------------|
| 1,5 | 91.5 | 15.5 | 0.003 | 1563556 | 42 KEL 1,5 |
| 2 | 102.0 | 18.0 | 0.004 | 6370090 | 42 KEL 2 |
| 2,5 | 114.5 | 20.5 | 0.006 | 6370170 | 42 KEL 2,5 |
| 3 | 129.0 | 23.0 | 0.010 | 6370250 | 42 KEL 3 |
| 4 | 144.0 | 29.0 | 0.019 | 6370330 | 42 KEL 4 |
| 5 | 165.0 | 33.0 | 0.033 | 6370410 | 42 KEL 5 |
| 6 | 186.0 | 38.0 | 0.053 | 6370680 | 42 KEL 6 |
| 7 | 197.0 | 41.0 | 0.076 | 1729241 | 42 KEL 7 |
| 8 | 208.0 | 44.0 | 0.103 | 6370760 | 42 KEL 8 |
| 10 | 234.0 | 50.0 | 0.179 | 6370840 | 42 KEL 10 |
| 12 | 262.0 | 57.0 | 0.287 | 6370920 | 42 KEL 12 |

H 42 EL-88 A HEXAGON ALLEN KEY SET

for in-hex screws, extra long

- > In blue plastic holder (LPDE)
- > GEDORE vanadium steel 61CrSiV5, zinc-plated

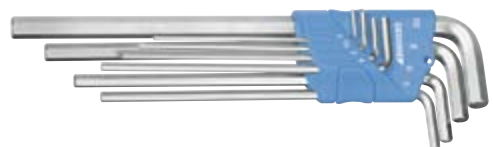


| Contents | kg | Code | No. |
|---|-------|---------|--------------|
| AF 42 EL 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16" | 0.300 | 1543555 | H 42 EL-88 A |



42 EL (MM) HEXAGON ALLEN KEY

for in-hex screws, extra long

- > Acc. to DIN ISO 2936
- > GEDORE vanadium steel 61CrSiV5, zinc-plated




| ● mm | L ₁ | L ₂ | ⚖ | Code | No. |
|------|----------------|----------------|-------|---------|----------------------|
| 2 | 102.0 | 18.0 | 0.004 | 6350810 | 42 EL 2 (5/64AF) |
| 2,5 | 114.5 | 20.5 | 0.007 | 6351030 | 42 EL 2,5 |
| 3 | 129.0 | 23.0 | 0.010 | 6351110 | 42 EL 3 |
| 4 | 144.0 | 29.0 | 0.019 | 6351380 | 42 EL 4 |
| 5 | 165.0 | 33.0 | 0.033 | 6351460 | 42 EL 5 |
| 5,5 | 186.0 | 38.0 | 0.047 | 1543342 | 42 EL 7/32AF (5,5MM) |
| 6 | 186.0 | 38.0 | 0.054 | 6351540 | 42 EL 6 |
| 7 | 194.0 | 41.0 | 0.750 | 2977486 | 42 EL 7 |
| 8 | 208.0 | 44.0 | 0.104 | 6351620 | 42 EL 8 |
| 10 | 234.0 | 50.0 | 0.184 | 6351700 | 42 EL 10 |
| 12 | 262.0 | 57.0 | 0.293 | 6351890 | 42 EL 12 |
| 14 | 294.0 | 70.0 | 0.453 | 6351970 | 42 EL 14 |

42 EL (AF) HEXAGON ALLEN KEY

for in-hex screws, extra long

- > GEDORE vanadium steel 61CrSiV5, zinc-plated



| ● AF | L ₁ | L ₂ | ⚖ | Code | No. |
|------|----------------|----------------|-------|---------|----------------------|
| 5/64 | 102.0 | 18.0 | 0.004 | 6350810 | 42 EL 2 (5/64AF) |
| 3/32 | 114.5 | 20.5 | 0.006 | 1543377 | 42 EL 3/32AF |
| 1/8 | 129.0 | 23.0 | 0.011 | 1543318 | 42 EL 1/8AF |
| 5/32 | 144.0 | 29.0 | 0.019 | 1543326 | 42 EL 5/32AF |
| 3/16 | 165.0 | 33.0 | 0.030 | 1543334 | 42 EL 3/16AF |
| 7/32 | 186.0 | 38.0 | 0.047 | 1543342 | 42 EL 7/32AF (5,5MM) |
| 1/4 | 197.0 | 41.0 | 0.065 | 1543369 | 42 EL 1/4AF |
| 5/16 | 208.0 | 44.0 | 0.103 | 1543350 | 42 EL 5/16AF |
| 3/8 | 234.0 | 50.0 | 0.167 | 1543385 | 42 EL 3/8AF |
| 1/2 | 277.0 | 63.0 | 0.355 | 1543393 | 42 EL 1/2AF |
| 9/16 | 294.0 | 70.0 | 0.475 | 1543407 | 42 EL 9/16AF |

PH 42-88 HEXAGON ALLEN KEY SET

for in-hex screws

- > In blue plastic holder
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



| Contents | ⚖ | Code | No. |
|----------------------------|-------|---------|----------|
| ● mm 42 2 2,5 3 4 5 6 8 10 | 0.245 | 6352000 | PH 42-88 |

H 42-10 HEXAGON ALLEN KEY SET

for in-hex screws

- > In blue plastic holder (LPDE)
- > Acc. to DIN ISO 2936
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



| Contents | ⚖ | Code | No. |
|------------------------------------|-------|---------|---------|
| ● mm 42 1,3 1,5 2 2,5 3 4 5 6 8 10 | 0.259 | 1505408 | H 42-10 |

42 (MM) HEXAGON ALLEN KEY SET

for in-hex screws

- > In blue PVC wallet
- > GEDORE vanadium steel 61CrSiV5, zinc-plated




| Contents | | Code | No. |
|-------------------------------|-------|---------|-------|
| mm 42 2 2,5 3 4 5 6 8 | 0.144 | 6347510 | 42-07 |
| mm 42 2,5 3 4 5 6 8 10 | 0.254 | 6349050 | 42-70 |

| Contents | | Code | No. |
|-----------------------------------|-------|---------|-------|
| mm 42 3 4 5 6 8 10 12 14 | 0.716 | 6347780 | 42-08 |
| mm 42 2 2,5 3 4 5 6 7 8 10 | 0.297 | 6347860 | 42-09 |

42 (MM) HEXAGON ALLEN KEY

for in-hex screws

- > Acc. to DIN ISO 2936
- > GEDORE vanadium steel 61CrSiV5, sizes 0.7 mm and 0.9 mm gun-metal finish, zinc-plated up to size 12 mm, chrome-plated up from size 14 mm
- * not standardised




| mm | L ₁ | L ₂ | | Code | No. |
|-----|----------------|----------------|-------|---------|-------------------|
| 0,7 | 33.0 | 7.0 | 0.001 | 6342200 | 42 0,7 |
| 0,9 | 33.0 | 11.0 | 0.001 | 6342390 | 42 0,9 |
| 1,3 | 41.0 | 13.0 | 0.001 | 6342470 | 42 1,3 |
| 1,5 | 46.5 | 15.5 | 0.001 | 6340260 | 42 1,5 |
| 2 | 52.0 | 18.0 | 0.002 | 6340340 | 42 2 (5/64AF) |
| 2,5 | 58.5 | 20.5 | 0.004 | 6340420 | 42 2,5 |
| 3 | 66.0 | 23.0 | 0.006 | 6340500 | 42 3 |
| 4 | 74.0 | 29.0 | 0.011 | 6340690 | 42 4 |
| 5 | 85.0 | 33.0 | 0.019 | 6340770 | 42 5 |
| 5,5 | * | 82.0 | 0.022 | 6344840 | 42 7/32AF (5,5MM) |
| 6 | | 96.0 | 0.031 | 6340850 | 42 6 |
| 7 | * | 102.0 | 0.044 | 6340930 | 42 7 |

| mm | L ₁ | L ₂ | | Code | No. | |
|----|----------------|----------------|-------|---------|---------|------|
| 8 | 108.0 | 44.0 | 0.061 | 6341070 | 42 8 | |
| 9 | * | 114.0 | 47.0 | 0.081 | 6341150 | 42 9 |
| 10 | 122.0 | 50.0 | 0.106 | 6341230 | 42 10 | |
| 12 | 137.0 | 57.0 | 0.169 | 6341310 | 42 12 | |
| 14 | 154.0 | 70.0 | 0.266 | 6341580 | 42 14 | |
| 17 | 177.0 | 80.0 | 0.430 | 6341660 | 42 17 | |
| 19 | 199.0 | 89.0 | 0.602 | 6341740 | 42 19 | |
| 22 | 222.0 | 102.0 | 0.907 | 6341820 | 42 22 | |
| 24 | 248.0 | 114.0 | 1.211 | 6341900 | 42 24 | |
| 27 | 277.0 | 127.0 | 1.711 | 6342550 | 42 27 | |
| 30 | 315.0 | 142.0 | 2.423 | 6342630 | 42 30 | |
| 32 | 347.0 | 157.0 | 3.010 | 6342710 | 42 32 | |

H 42-88 A HEXAGON ALLEN KEY SET

for in-hex screws

- > In blue plastic holder (LPDE)
- > GEDORE vanadium steel 61CrSiV5, zinc-plated

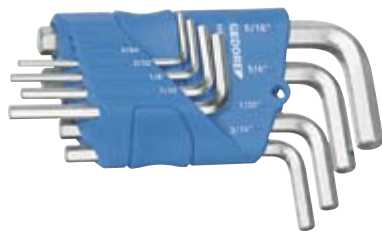

| Contents | | Code | No. |
|--|-------|---------|-----------|
| "AF 42 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16" | 0.172 | 1505424 | H 42-88 A |

42 (AF) HEXAGON ALLEN KEY SET

for in-hex screws

- > In blue PVC wallet
- > GEDORE vanadium steel 61CrSiV5, zinc-plated




| Contents | | Code | No. |
|---|-------|---------|---------|
| "AF 5/64 3/32 1/8 5/32 3/16 7/32 1/4" | 0.103 | 6348750 | 42-07 A |
| "AF 1/8 5/32 3/16 1/4 5/16 3/8 1/2 9/16" | 0.731 | 6348830 | 42-08 A |
| "AF 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16 3/8" | 0.257 | 6348910 | 42-09 A |

42 (AF) HEXAGON ALLEN KEY

for in-hex screws

> GEDORE vanadium steel 61CrSiV5, zinc-plated up to size 1/2", chrome-plated up from size 9/16"

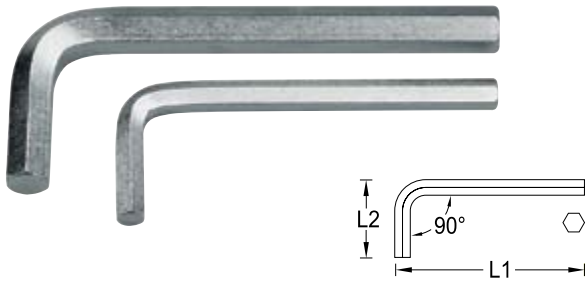

| ● "AF | L ₁ | L ₂ | ⚖ kg | Code | No. |
|-------|----------------|----------------|-------|---------|-------------------|
| 3/64 | 41.0 | 13.0 | 0.002 | 6342120 | 42 3/64AF |
| 1/16 | 46.5 | 15.5 | 0.002 | 6342040 | 42 1/16AF |
| 3/32 | 56.5 | 20.5 | 0.004 | 6344330 | 42 3/32AF |
| 5/64 | 52.0 | 18.0 | 0.002 | 6340340 | 42 2 (5/64AF) |
| 1/8 | 60.0 | 23.0 | 0.006 | 6344410 | 42 1/8AF |
| 5/32 | 67.0 | 26.0 | 0.010 | 6344680 | 42 5/32AF |
| 3/16 | 73.0 | 30.0 | 0.015 | 6344760 | 42 3/16AF |
| 7/32 | 82.0 | 32.0 | 0.022 | 6344840 | 42 7/32AF (5,5MM) |
| 1/4 | 92.0 | 36.5 | 0.035 | 6344920 | 42 1/4AF |
| 5/16 | 102.0 | 43.0 | 0.059 | 6345060 | 42 5/16AF |
| 3/8 | 115.0 | 49.0 | 0.094 | 6345140 | 42 3/8AF |
| 1/2 | 142.0 | 61.0 | 0.205 | 6345220 | 42 1/2AF |
| 9/16 | 154.0 | 66.0 | 0.274 | 6345300 | 42 9/16AF |
| 5/8 | 168.0 | 76.0 | 0.376 | 6345490 | 42 5/8AF |
| 3/4 | 199.0 | 89.0 | 0.309 | 6345570 | 42 3/4AF |


42 Z HEXAGON ALLEN KEY

with pilot, for in-hex screws

> Acc. to DIN 6911

> Chrome-vanadium steel, zinc-plated

* not standardised

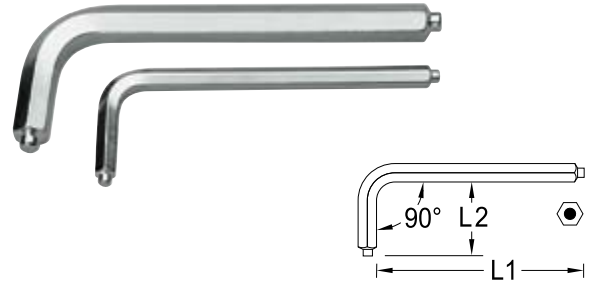

| ● mm | L ₁ | L ₂ | ⚖ kg | Code | No. |
|------|----------------|----------------|-------|---------|---------|
| 3 | 63 | 20 | 0.006 | 6342980 | 42 Z 3 |
| 4 | 70 | 25 | 0.010 | 6343010 | 42 Z 4 |
| 5 | 80 | 28 | 0.019 | 6343280 | 42 Z 5 |
| 6 | 90 | 32 | 0.031 | 6343360 | 42 Z 6 |
| 7 | * | 34 | 0.042 | 6343440 | 42 Z 7 |
| 8 | 100 | 36 | 0.058 | 6343520 | 42 Z 8 |
| 10 | 112 | 40 | 0.100 | 6343600 | 42 Z 10 |
| 12 | 125 | 45 | 0.162 | 6343790 | 42 Z 12 |
| 14 | 140 | 56 | 0.254 | 6343870 | 42 Z 14 |
| 17 | 160 | 63 | 0.418 | 6343950 | 42 Z 17 |
| 19 | 180 | 70 | 0.584 | 6344090 | 42 Z 19 |

S 42-09 A HEXAGON ALLEN KEY SET

for in-hex screws

> On key ring with quick release
> GEDORE vanadium steel 61CrSiV5, zinc-plated



| Contents | ⚖ kg | Code | No. |
|---|-------|---------|-----------|
| ● "AF 42 5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16 3/8" | 0.273 | 6348160 | S 42-09 A |

S 42-07 HEXAGON ALLEN KEY SET

for in-hex screws

> On key ring with quick release
> GEDORE vanadium steel 61CrSiV5, zinc-plated



| Contents | ⚖ kg | Code | No. |
|-----------------------|-------|---------|---------|
| ● mm 42 2,5 3 4 5 6 8 | 0.162 | 6347430 | S 42-07 |

SCL 42-70 HEXAGON ALLEN KEY SET

for in-hex screws

- > In robust metal clip
- > GEDORE vanadium steel 61CrSiV5, zinc-plated




| Contents | | Code | No. |
|-----------------------|-------|---------|-----------|
| ● mm 2,5 3 4 5 6 8 10 | 0.360 | 6347350 | SCL 42-70 |

SCL 42 K-70 HEXAGON ALLEN KEY SET

for in-hex screws

- > In robust metal clip
- > Execution K with ball end
- > GEDORE vanadium steel 61CrSiV5, zinc-plated

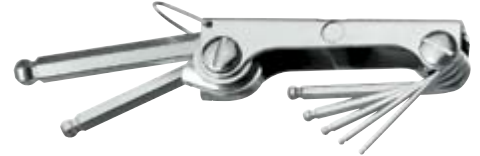

| Contents | | Code | No. |
|-----------------------|-------|---------|-------------|
| ● mm 2,5 3 4 5 6 8 10 | 0.361 | 6371140 | SCL 42 K-70 |

SCL 42-90 A HEXAGON ALLEN KEY SET

for in-hex screws

- > In robust metal clip
- > GEDORE vanadium steel 61CrSiV5, zinc-plated



| Contents | | Code | No. |
|--|-------|---------|-------------|
| ● AF 5/64 3/32 7/64 1/8 9/64 5/32 3/16 7/32 1/4" | 0.260 | 6354800 | SCL 42-90 A |

SCL 43 TX-80 CRANKED SOCKET KEY SET

for recessed TORX® screws


- > In robust metal clip
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



| Contents | | Code | No. |
|----------------------------------|-------|---------|--------------|
| ● T9 T10 T15 T20 T25 T27 T30 T40 | 0.286 | 6346460 | SCL 43 TX-80 |

42 X CRANKED ALLEN SOCKET SCREWDRIVER for multi-point screws XZN


- > Acc. to DIN 65253, tips acc. to DIN 2325
- > GEDORE vanadium steel 50CrV4, chromated

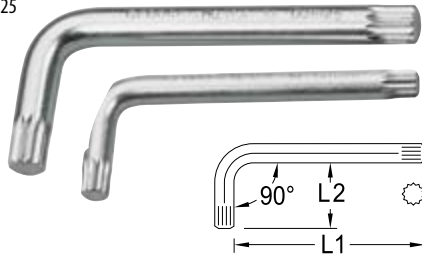

| | M | L ₁ | L ₂ | | Code | No. |
|---|------|----------------|----------------|-------|---------|---------|
| ● | M 4 | 63 | 20 | 0.009 | 1531212 | 42 X 4 |
| ● | M 5 | 75 | 30 | 0.015 | 6350060 | 42 X 5 |
| ● | M 6 | 86 | 34 | 0.025 | 6350140 | 42 X 6 |
| ● | M 8 | 98 | 40 | 0.043 | 6350220 | 42 X 8 |
| ● | M 10 | 110 | 46 | 0.085 | 6350300 | 42 X 10 |
| ● | M 12 | 124 | 52 | 0.124 | 6350490 | 42 X 12 |
| ● | M 14 | 139 | 59 | 0.191 | 6350570 | 42 X 14 |
| ● | M 16 | 156 | 72 | 0.308 | 6350650 | 42 X 16 |
| ● | M 18 | 178 | 81 | 0.333 | 6350730 | 42 X 18 |

43 CRANKED SOCKET KEY for multi-spline screws RIBE®

- > GEDORE vanadium steel 50CrV4, chromated
- > RIBE® = reg. trademark of Richard Bergner GmbH & Co. KG, Schwabach, Germany

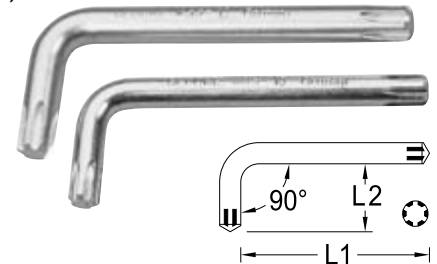

| | M | L ₁ | L ₂ | | Code | No. |
|---|-----|----------------|----------------|-------|---------|-------|
| ● | M5 | 71 | 25 | 0.016 | 6352270 | 43 5 |
| ● | M6 | 80 | 28 | 0.025 | 6352350 | 43 6 |
| ● | M8 | 90 | 32 | 0.049 | 6352430 | 43 8 |
| ● | M10 | 100 | 36 | 0.084 | 6352510 | 43 10 |
| ● | M12 | 112 | 40 | 0.135 | 6352780 | 43 12 |
| ● | M14 | 125 | 45 | 0.203 | 6352860 | 43 14 |

H 43 TX

CRANKED SOCKET KEY SET

for recessed TORX® screws

- > In blue LDPE holder
- > Chrome-vanadium steel 50CrV4, gun-metal finish
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



| Contents | kg | Code | No. |
|--|-------|---------|------------|
| 43 TX T7 T8 T9 T10 T15 T20 T25 T30 T40 | 0.120 | 1531417 | H 43 TX-09 |
| 43 TX T9 T10 T15 T20 T25 T27 T30 T40 | 0.129 | 1531425 | H 43 TX-88 |
| 43 TX T10 T15 T20 T25 T27 T30 T40 T45 | 0.168 | 1531433 | H 43 TX-08 |

43 TX-09

CRANKED SOCKET KEY SET

for recessed TORX® screws

- > In blue PVC wallet
- > Chrome-vanadium steel 50CrV4, gun-metal finish
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



| Contents | kg | Code | No. |
|--|-------|---------|----------|
| 43 TX T7 T8 T9 T10 T15 T20 T25 T30 T40 | 0.115 | 6360960 | 43 TX-09 |

43 TX

CRANKED SOCKET KEY

for recessed TORX® screws

- > Chrome-vanadium steel 50CrV4, gun-metal finish
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



| ⊕ | M | mm | L ₁ | L ₂ | kg | Code | No. |
|-----|-----------|-------|----------------|----------------|-------|---------|-----------|
| T6 | M2 | 1,69 | 42 | 16 | 0.003 | 6363550 | 43 TX T6 |
| T7 | M2,5 | 1,99 | 48 | 16 | 0.003 | 6363630 | 43 TX T7 |
| T8 | M2,5 | 2,31 | 48 | 16 | 0.004 | 6363710 | 43 TX T8 |
| T9 | M3 | 2,50 | 48 | 16 | 0.004 | 6363980 | 43 TX T9 |
| T10 | M3 - M3,5 | 2,74 | 51 | 17 | 0.005 | 6364010 | 43 TX T10 |
| T15 | M3,5 - M4 | 3,27 | 54 | 18 | 0.006 | 6364280 | 43 TX T15 |
| T20 | M4 - M5 | 3,86 | 57 | 19 | 0.008 | 6364360 | 43 TX T20 |
| T25 | M4,5 - M5 | 4,43 | 60 | 20 | 0.010 | 6364440 | 43 TX T25 |
| T27 | M4,5 - M6 | 4,99 | 64 | 21 | 0.016 | 6364520 | 43 TX T27 |
| T30 | M6 - M7 | 5,52 | 70 | 24 | 0.022 | 6364600 | 43 TX T30 |
| T40 | M7 - M8 | 6,65 | 76 | 26 | 0.031 | 6364790 | 43 TX T40 |
| T45 | M8 - M10 | 7,82 | 83 | 29 | 0.046 | 6364870 | 43 TX T45 |
| T50 | M10 | 8,83 | 95 | 32 | 0.060 | 6364950 | 43 TX T50 |
| T55 | M12 | 11,22 | 108 | 35 | 0.122 | 6365090 | 43 TX T55 |
| T60 | M14 | 13,25 | 120 | 38 | 0.187 | 6365170 | 43 TX T60 |

H 43 KTX-07

CRANKED SOCKET KEY SET

for recessed TORX® screws

- > In blue LDPE holder
- > With ball end
- > Chrome-vanadium steel 50CrV4, gun-metal finish
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA




| Contents | kg | Code | No. |
|------------------------------------|-------|---------|-------------|
| 43 KTX T10 T15 T20 T25 T27 T30 T40 | 0.169 | 1531441 | H 43 KTX-07 |

43 KTX CRANKED SOCKET KEY

for recessed TORX® screws, with ball end

- > Working angle approx. 25°
- > Chrome-vanadium steel, gun-metal finish
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

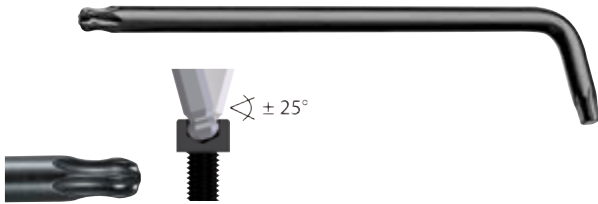

| ⊕ | mm | mm | L ₁ | L ₂ | kg | Code | No. |
|-----|-----------|------|----------------|----------------|-------|---------|------------|
| T10 | M3 - M3,5 | 2,74 | 73 | 17 | 0.006 | 6367110 | 43 KTX T10 |
| T15 | M3,5 - M4 | 3,27 | 83 | 17 | 0.009 | 6367380 | 43 KTX T15 |
| T20 | M4 - M5 | 3,86 | 94 | 18 | 0.012 | 6367460 | 43 KTX T20 |
| T25 | M4,5 - M5 | 4,43 | 96 | 18 | 0.015 | 6367540 | 43 KTX T25 |
| T27 | M4,5 - M6 | 4,99 | 106 | 20 | 0.024 | 6367620 | 43 KTX T27 |
| T30 | M6 - M7 | 5,52 | 119 | 24 | 0.033 | 6367700 | 43 KTX T30 |
| T40 | M7 - M8 | 6,65 | 132 | 26 | 0.049 | 6367890 | 43 KTX T40 |

708 TORX® GAUGE

- > Easy identification of TORX® sizes, internal E4-E16, external T10-T60
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



| Contents | kg | Code | No. |
|-------------|-------|---------|-----|
| ⊕ E4 - E16 | 0.022 | 1394428 | 708 |
| ⊕ T10 - T60 | | | |

173 CRANKED SCREWDRIVER

for slotted head screws

- > Acc. to DIN 5200, blade tips acc. to DIN ISO 2380-2
- > Chrome-vanadium steel, matt nickel-plated



| mm | mm | mm | kg | Code | No. |
|------|-----|-----|-------|---------|---------|
| 3.5 | 0.6 | 90 | 0.010 | 6437180 | 173 3,5 |
| 4.0 | 0.8 | 100 | 0.013 | 6437850 | 173 4 |
| 5.5 | 1.0 | 125 | 0.025 | 6436100 | 173 5,5 |
| 8.0 | 1.2 | 150 | 0.050 | 6436370 | 173 8 |
| 10.0 | 1.6 | 175 | 0.087 | 6437930 | 173 10 |
| 12.0 | 2.0 | 200 | 0.127 | 6436530 | 173 12 |

174 CRANKED SCREWDRIVER

for cross-head screws PH

- > Acc. to DIN 5208, tips acc. to DIN ISO 8764-1 PH
- > Chrome-vanadium steel, matt nickel-plated



| ⊕ PH | mm | mm | kg | Code | No. |
|------|----------|-----|-------|---------|-------|
| 1-2 | M2 - M5 | 100 | 0.029 | 6436880 | 174 1 |
| 3-4 | M6 - M10 | 200 | 0.121 | 6436960 | 174 3 |

VARIOUS

149 MAGNETIZER AND DEMAGNETIZER

- > Magnetizes or demagnetizes screwdrivers, tweezers and similar tools made from steel
- > Blue housing, made from high-quality plastic, unbreakable, cadmium-free



| L | H | W | kg | Code | No. |
|----|----|----|-------|---------|-----|
| 52 | 26 | 50 | 0.088 | 6416500 | 149 |

156 S SQUARE BLADED AWL

- > Blue handle with hanging hole
- > Blade bright nickel-plated



| mm | mm | kg | Code | No. |
|-----|-----|-------|---------|-------|
| 100 | 200 | 0.084 | 6424520 | 156 S |