

# HIGH FREQUENCY WIRE WOUND TRANSFORMERS

## EE13 Platforms - THT TYPE



- AC/DC and DC/DC Switching Transformers
- Reinforced Insulation
- 3000Vrms Hi-Pot
- Topology: Flyback
- Custom Design Available

### Electrical Specifications @ 25°C — Operating Temperature -40°C to 130°C<sup>1</sup>

PA2718NL	Pri. Inductance	(5 - 1)	1.74 mH ± 10%	
	Lk. Inductance	(5 - 1)	98 µH MAX	
	w/	(7-8)	shorted	
	DCR	(5-1)	5200	m Ω Max
		(7-8)	24	
Hi-Pot	Pri-Sec	3000 Vrms		
K1 Factor		7505		

**CM - FLYBACK TRANSFORMER**

#### NOTES:


- The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
- For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700Gauss. To calculate the peak flux density use the following formula:  

$$B_{pk} \text{ (Gauss)} = K1\_Factor * I_{pk}(A)$$
- In high volt-µsec applications, it is important to calculate the core loss of the transformer. Approximate transformer core loss can be calculated as:  

$$CoreLoss \text{ (W)} = 2.58E-13 X (Freq\_kHz)^{1.35} X (DB\_Gauss)^{2.80}$$
 where DB can be calculated as:  
 For Flyback Topology:  $DB = K1\_Factor * D(A)$   
 For Forward Topology:  $DB = K1\_Factor * Volt\text{-}\mu\text{sec}$
- The “NL” suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the “NL” suffix, but an RoHS compliant version is required, please contact Pulse for availability.


# HIGH FREQUENCY WIRE WOUND TRANSFORMERS

## EE13 Platforms - THT Type

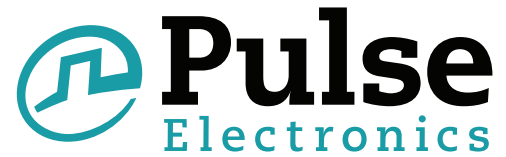

### Mechanical

PA2718NL

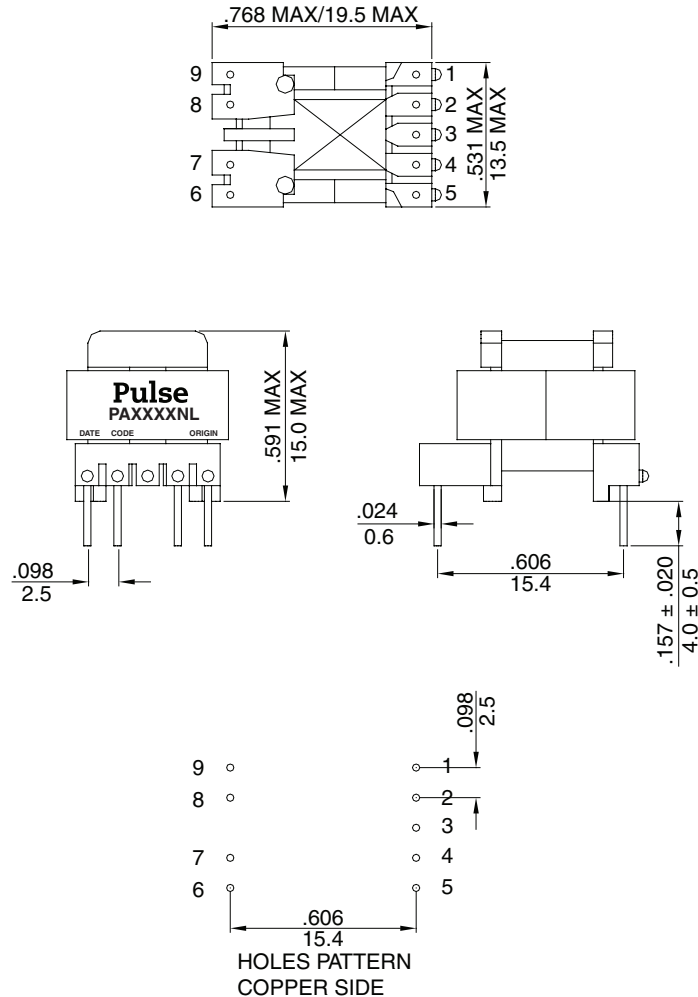

### For More Information:

Pulse North America Headquarters	Pulse European Headquarters	Pulse China Headquarters	Pulse North China	Pulse South Asia	Pulse North Asia
12220 World Trade Dr. San Diego, CA 92128 U.S.A.	Einsteinstrasse 1 D-71083 Herrenberg Germany	B402, Shenzhen Academy of Aerospace Technology Bldg. 10th Kejinan Rd. High-Tech Zone Nanshan District Shenzen, PR China 518057	Room 1503 XinYin Building No. 888 YiShan Rd. Shanghai 200233 China	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324	No. 26 Kao Ching Rd. Yang Mei Chen Taoyuan Hsien Taiwan, R. O. C. 32667
TEL: 858 674 8100 FAX: 858 674 8262	TEL: 49 7032 7806 0 FAX: 49 7032 7806 12	TEL: 86 755 33966678 FAX: 86 755 33966700	TEL: 86 21 32181071 FAX: 86 21 32181396	TEL: 65 6287 8998 FAX: 65 6280 0080	TEL: 886 3 4643715 FAX: 886 3 4641911

This is a "Preliminary" product data sheet. Products mentioned on this data sheet are in development and in the process of being qualified. These products are not fully released nor are they in production. Features, specifications and performance of products offered are subject to change without notice. Other brand and product names mentioned herein may be products and/or registered trademarks of their respective owners. For current information on this product, please contact the Pulse office nearest you and ask for the "Power Applications Engineer." Pulse and the Squarewave logo are trademarks of Pulse Electronics, Inc., registered in the U.S. and other countries.

© Copyright, 2011. Pulse Electronics, Corporation. All rights reserved.