







| PERFORMANCE SPECIFICATION | MIN | TYP | MAX | UNITS |
|--|------|------|------|--------------|
| Lower Frequency: | | | 3430 | MHz |
| Upper Frequency: | 3480 | | | MHz |
| Tuning Voltage: | 0.5 | | 4.5 | VDC |
| Supply Voltage: | 4.75 | 5.0 | 5.25 | VDC |
| Output Power: | 0 | +2.5 | +5.0 | dBm |
| Supply Current: | | | 22 | mA |
| Harmonic Suppression (2 nd Harmonic): | | -30 | | dBc |
| Pushing: | | | 5.0 | MHz/V |
| Pulling, all Phases: | | | 18.0 | MHz pk-pk |
| Tuning Sensitivity: | | 48 | | MHz/V |
| Phase Noise @ 10kHz offset: | | -97 | -93 | dBc/Hz |
| Phase Noise @ 100kHz offset: | | -119 | -115 | dBc/Hz |
| Load Impedance: | | 50 | | Ω |
| Input Capacitance: | | | 10 | pF |
| Operating Temperature Range: | -40 | | +85 | $^{\circ}$ C |
| Storage Temperature Range: | -45 | | +90 | $^{\circ}$ C |

Phase Noise (1 Hz BW, Typical)

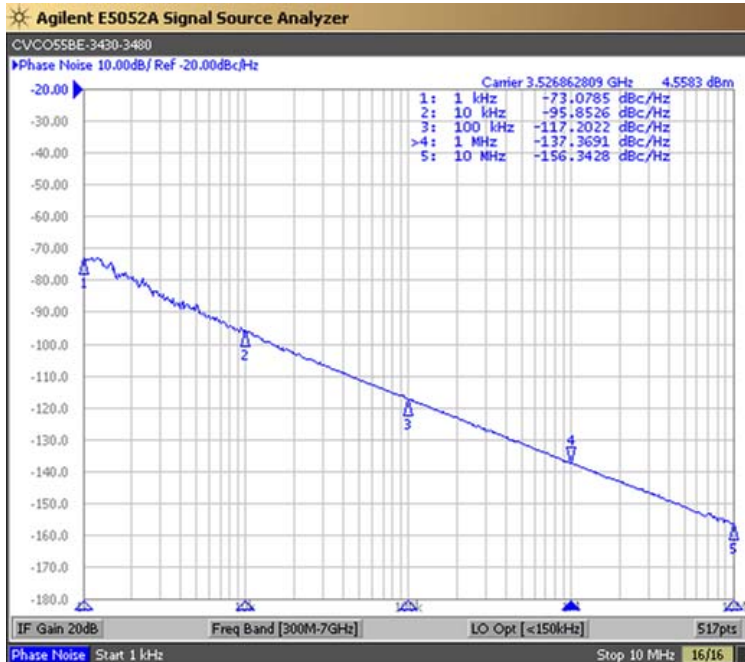

Tuning Curve (Typical)

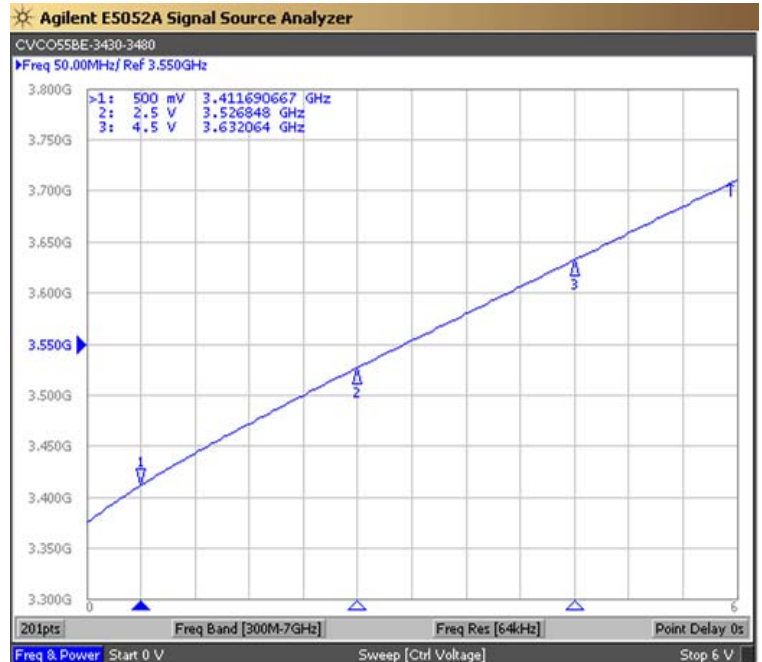

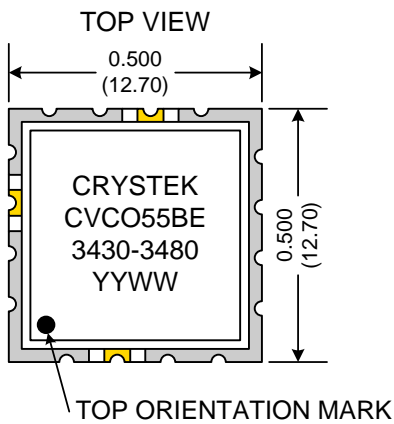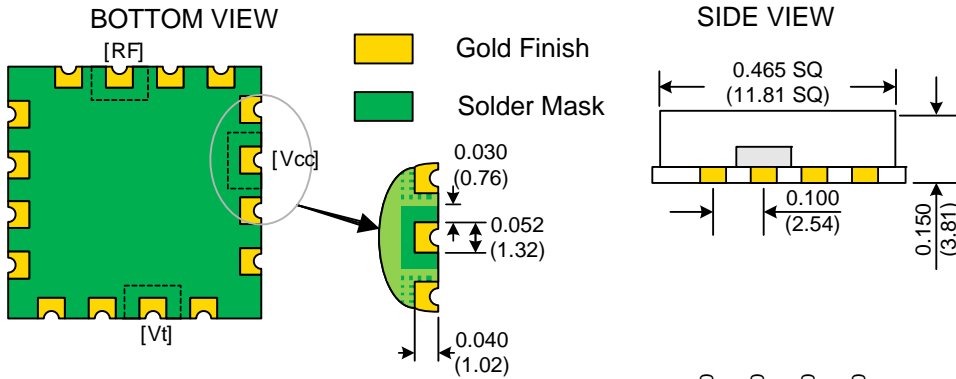

| Pad | Connection |
|--------|------------|
| 2 | Vt |
| 10 | RF-OUTPUT |
| 14 | Vcc |
| Others | GROUND |

- Unless otherwise specified, Dimensions are in: $\frac{IN}{(mm)}$
- Pad Location Dimensions are in: Inches

TAPE AND REEL



Drawing not to scale

Product Control:

| | | | |
|----------------------|--------------------|---------------|-------------|
| Crystek Part Number: | CVCO55BE-3430-3480 | Release Date: | 20-Aug-2013 |
| Revision Level: | F | Responsible: | C. Vales |

Specification is subject to change without notice