

# KSB834

KSB834

## Low Frequency Power Amplifier

- Complement to KSD880



1.Base 2.Collector 3.Emitter

## PNP Silicon Epitaxial Transistor

### Absolute Maximum Ratings $T_C=25^\circ\text{C}$ unless otherwise noted

| Symbol    | Parameter  | Value      | Units            |
|-----------|--|------------|------------------|
| $V_{CBO}$ | Collector-Base Voltage                           | - 60       | V                |
| $V_{CEO}$ | Collector-Emitter Voltage                        | - 60       | V                |
| $V_{EBO}$ | Emitter-Base Voltage                             | - 7        | V                |
| $I_C$     | Collector Current                                | - 3        | A                |
| $I_B$     | Base Current                                     | - 0.5      | A                |
| $P_C$     | Collector Dissipation ( $T_C=25^\circ\text{C}$ ) | 30         | W                |
| $P_C$     | Collector Dissipation ( $T_a=25^\circ\text{C}$ ) | 1.5        | W                |
| $T_J$     | Junction Temperature                             | 150        | $^\circ\text{C}$ |
| $T_{STG}$ | Storage Temperature                              | - 55 ~ 150 | $^\circ\text{C}$ |

### Electrical Characteristics $T_C=25^\circ\text{C}$ unless otherwise noted

| Symbol                 | Parameter                            | Test Condition  | Min.     | Typ.  | Max.  | Units         |
|------------------------|--------------------------------------|---|----------|-------|-------|---------------|
| $I_{CBO}$              | Collector Cut-off Current            | $V_{CB} = -60\text{V}, I_E = 0$   |          |       | - 100 | $\mu\text{A}$ |
| $I_{EBO}$              | Emitter Cut-off Current              | $V_{EB} = -7\text{V}, I_C = 0$  |          |       | - 100 | $\mu\text{A}$ |
| $BV_{CEO}$             | Collector-Emitter Breakdown Voltage  | $I_C = -50\text{mA}, I_B = 0$   | - 60     |       |       | V             |
| $h_{FE1}$<br>$h_{FE2}$ | DC Current Gain                      | $V_{CE} = -5\text{V}, I_C = -0.5\text{A}$<br>$V_{CE} = -5\text{V}, I_C = -3\text{A}$              | 60<br>20 |       | 200   |               |
| $V_{CE(sat)}$          | Collector-Emitter Saturation Voltage | $I_C = -3\text{A}, I_B = -0.3\text{A}$  |          | - 0.5 | - 1   | V             |
| $V_{BE(on)}$           | Base-Emitter ON Voltage              | $V_{CE} = -5\text{V}, I_C = -0.5\text{A}$   |          | - 0.7 | - 1   | V             |
| $f_T$                  | Current Gain Bandwidth Product       | $V_{CE} = -5\text{V}, I_C = -0.5\text{A}$   |          | 9     |       | MHz           |
| $C_{ob}$               | Output Capacitance                   | $V_{CB} = -10\text{V}, I_E = 0$<br>$f = 1\text{MHz}$  |          | 150   |       | pF            |
| $t_{ON}$               | Turn ON Time                         | $V_{CC} = -30\text{V}, I_C = -1\text{A}$<br>$I_{B1} = -I_{B2} = -0.2\text{A}$<br>$R_L = 30\Omega$ |          | 0.4   |       | $\mu\text{s}$ |
| $T_{STG}$              | Storage Time                         |   |          | 1.7   |       | $\mu\text{s}$ |
| $t_F$                  | Fall Time                            |   |          | 0.5   |       | $\mu\text{s}$ |

### $h_{FE}$ Classification

| Classification | O        | Y         |
|----------------|----------|-----------|
| $h_{FE1}$      | 60 ~ 120 | 100 ~ 200 |

# Typical Characteristics

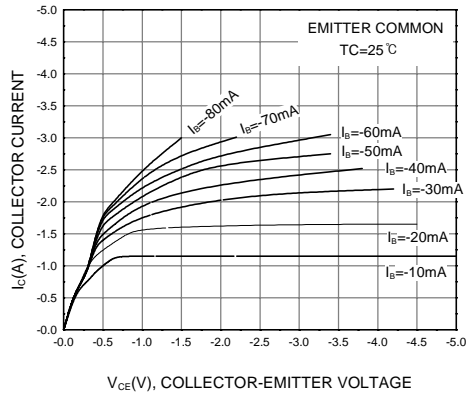


Figure 1. Static Characteristic

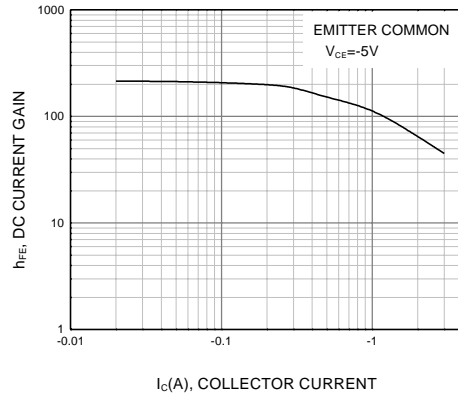


Figure 2. DC current Gain

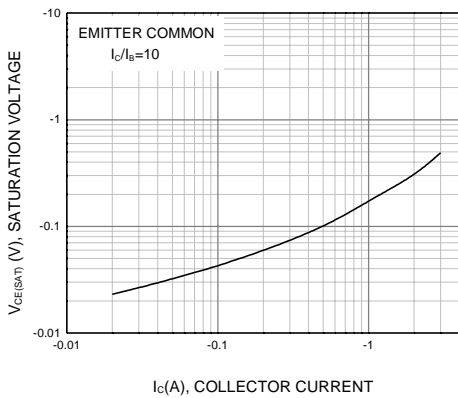


Figure 3. Collector-Emitter Saturation Voltage

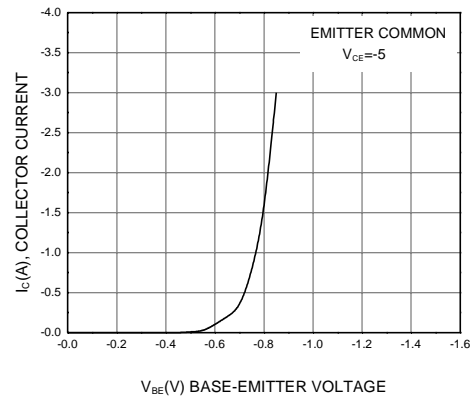


Figure 4. Base-Emitter On Voltage

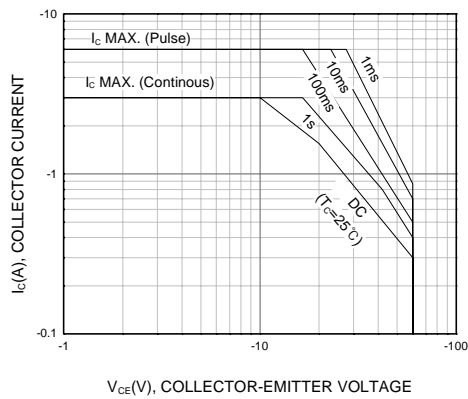


Figure 5. Safe Operating Area

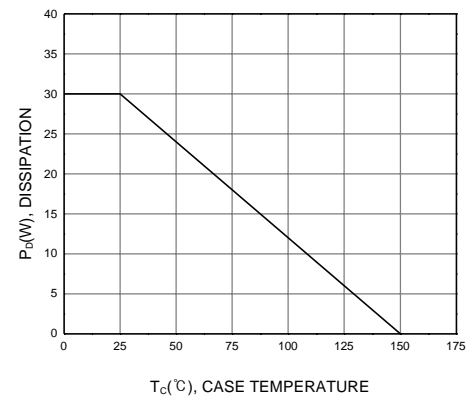


Figure 6. Power Derating

# Package Dimensions

KSB834

## TO-220



Dimensions in Millimeters

## TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

|                      |                     |                     |                 |
|----------------------|---------------------|---------------------|-----------------|
| ACEx™                | FAST®               | OPTOPLANAR™         | STAR*POWER™     |
| Bottomless™          | FASTr™              | PACMAN™             | Stealth™        |
| CoolFET™             | FRFET™              | POP™                | SuperSOT™-3     |
| CROSSVOLT™           | GlobalOptoisolator™ | Power247™           | SuperSOT™-6     |
| DenseTrench™         | GTO™                | PowerTrench®        | SuperSOT™-8     |
| DOMET™               | HiSeC™              | QFET™               | SyncFET™        |
| EcoSPARK™            | ISOPLANAR™          | QS™                 | TruTranslation™ |
| E <sup>2</sup> CMOS™ | LittleFET™          | QT Optoelectronics™ | TinyLogic™      |
| EnSigna™             | MicroFET™           | Quiet Series™       | UHC™            |
| FACT™                | MICROWIRE™          | SLIENT SWITCHER®    | UltraFET®       |
| FACT Quiet Series™   | OPTOLOGIC™          | SMART START™        | VCX™            |

STAR\*POWER is used under license

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status         | Definition  |
|--------------------------|------------------------|---|
| Advance Information      | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.  |
| Preliminary              | First Production       | This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| No Identification Needed | Full Production        | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.   |
| Obsolete                 | Not In Production      | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.   |

Fairchild Semiconductor

SEARCH | [Parametric](#) | [Cross Reference](#)

space

Product Folders and

Applies

find products

[Home](#) >> [Find products](#) >>

[Products groups](#)

[Analog and Mixed](#)

[Signal](#)

[Discrete](#)

[Interface](#)

[Logic](#)

[Microcontrollers](#)

[Non-Volatile](#)

[Memory](#)

[Optoelectronics](#)

[Markets and applications](#)

[New products](#)

[Product selection and parametric search](#)

[Cross-reference search](#)

KSB834  
PNP Epitaxial Silicon Transistor

[Contents](#)

[Features](#) | [Product status/pricing/packageing](#)

Features

**LOW Frequency Power Amplifier**

- Complement to KSD880

[back to top](#)

[Product status/pricing/packageing](#)

| Product   | Product status  | Pricing* | Package type | Leads | Packing method |
|-----------|-----------------|----------|--------------|-------|----------------|
| KSB834Y   | Full Production | \$0.363  | TO-220       | 3     | BULK           |
| KSB834OTU | Full Production | \$0.363  | TO-220       | 3     | RAIL           |
| KSB834YTU | Full Production | \$0.363  | TO-220       | 3     | RAIL           |
| KSB834O   | Full Production | \$0.363  | TO-220       | 3     | BULK           |

\* 1,000 piece Budgetary Pricing

[back to top](#)

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) | [Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

© Copyright 2002 Fairchild Semiconductor

Related Links

[Request samples](#)

[How to order products](#)

[Product Change Notices \(PCNs\)](#)

[Support](#)

[Distributor and field sales representatives](#)

[Quality and reliability](#)

[Design tools](#)

[Datasheet](#)

[Download this datasheet](#)

PDF

[e-mail this datasheet](#)

[E-]

This page

[Print version](#)