


TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y LinCMOS™ QUAD OPERATIONAL AMPLIFIERS

SLOS003F – JUNE 1983 – REVISED AUGUST 1994

- A-Suffix Versions Offer 5-mV V_{IO}
- B-Suffix Versions Offer 2-mV V_{IO}
- Wide Range of Supply Voltages
1.4 V to 16 V
- True Single-Supply Operation
- Common-Mode Input Voltage Includes the Negative Rail
- Low Noise . . . 25 nV/ $\sqrt{\text{Hz}}$ Typ at $f = 1 \text{ kHz}$
(High-Bias Version)

D, N, OR PW PACKAGE
(TOP VIEW)

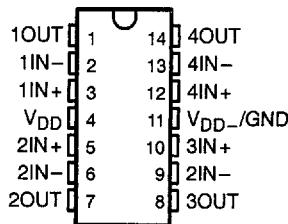


description

The TLC254, TLC254A, TLC254B, TLC25L4, TLC25L4A, TLC25L4B, TLC25M4, TLC25M4A and TL25M4B are low-cost, low-power quad operational amplifiers designed to operate with single or dual supplies. These devices utilize the Texas Instruments silicon gate LinCMOS™ process, giving them stable input-offset voltages that are available in selected grades of 2, 5, or 10 mV maximum, very high input impedances, and extremely low input offset and bias currents. Because the input common-mode range extends to the negative rail and the power consumption is extremely low, this series is ideally suited for battery-powered or energy-conserving applications. The series offers operation down to a 1.4-V supply, is stable at unity gain, and has excellent noise characteristics.

These devices have internal electrostatic-discharge (ESD) protection circuits that prevent catastrophic failures at voltages up to 2000 V as tested under MIL-STD-883C, Method 3015.1. However, care should be exercised in handling these devices as exposure to ESD may result in degradation of the device parametric performance.

Because of the extremely high input impedance and low input bias and offset currents, applications for these devices include many areas that have previously been limited to BIFET and NFET product types. Any circuit using high-impedance elements and requiring small offset errors is a good candidate for cost-effective use of these devices. Many features associated with bipolar technology are available with LinCMOS operational amplifiers without the power penalties of traditional bipolar devices.

symbol (each amplifier)



AVAILABLE OPTIONS

TA	$V_{IO\max}$ AT 25°C	PACKAGED DEVICES			CHIP FORM (Y)
		SMALL OUTLINE (D)	PLASTIC DIP (N)	TSSOP (PW)	
0°C to 70°C	10 mV	TLC254CD	TLC254CN	TLC254CPW	TLC254Y
	5 mV	TLC254ACD	TLC254ACN	—	—
	2 mV	TLC254BCD	TLC254BCN	—	—
	10 mV	TLC25L4CD	TLC25L4CN	TLC25L4CPW	TLC25L4Y
	5 mV	TLC25L4ACD	TLC25L4ACN	—	—
	2 mV	TLC25L2BCD	TLC25L4BCN	—	—
	10 mV	TLC25M4CD	TLC25M4CN	TLC25M4CPW	TLC25M4Y
	5 mV	TLC25M4ACD	TLC25M4ACN	—	—
	2 mV	TLC25M4BCD	TLC25M4BCN	—	—

The D package is available taped and reeled. Add the suffix R to the device type (e.g., TLC254CDR). Chips are tested at 25°C.

LinBiCMOS is a trademark of Texas Instruments Incorporated.

PRODUCTION DATA Information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1994, Texas Instruments Incorporated



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B**TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y****LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003F - JUNE 1983 - REVISED AUGUST 1994

description (continued)


General applications such as transducer interfacing, analog calculations, amplifier blocks, active filters, and signal buffering are all easily designed with these devices. Remote and inaccessible equipment applications are possible using their low-voltage and low-power capabilities. These devices are well suited to solve the difficult problems associated with single-battery and solar-cell-powered applications. This series includes devices that are characterized for the commercial temperature range and are available in 14-pin plastic dip and the small-outline packages. The device is also available in chip form.

These devices are characterized for operation from 0°C to 70°C.

DEVICE FEATURES

PARAMETER	TLC25L4_C (LOW BIAS)	TLC25M4_C (MEDIUM BIAS)	TLC254_C (HIGH BIAS)
Supply current (Typ)	40 μ A	600 μ A	4000 μ A
Slew rate (Typ)	0.04 V/ μ A	0.6 V/ μ A	4.5 V/ μ A
Input offset voltage (Max)			
TLC254C, TLC25L4C, TLC25M4C	10 mV	10 mV	10 mV
TLC254AC, TLC25L4AC, TLC25M4AC	5 mV	5 mV	5 mV
TLC254BC, TLC25L4BC, TLC25M4BC	2 mV	2 mV	2 mV
Offset voltage drift (Typ)	0.1 μ V/month†	0.1 μ V/month†	0.1 μ V/month†
Offset voltage temperature coefficient (Typ)	0.7 μ V/°C	2 μ V/°C	5 μ V/°C
Input bias current (Typ)	1 pA	1 pA	1 pA
Input offset current (Typ)	1 pA	1 pA	1 pA

† The long-term drift value applies after the first month.

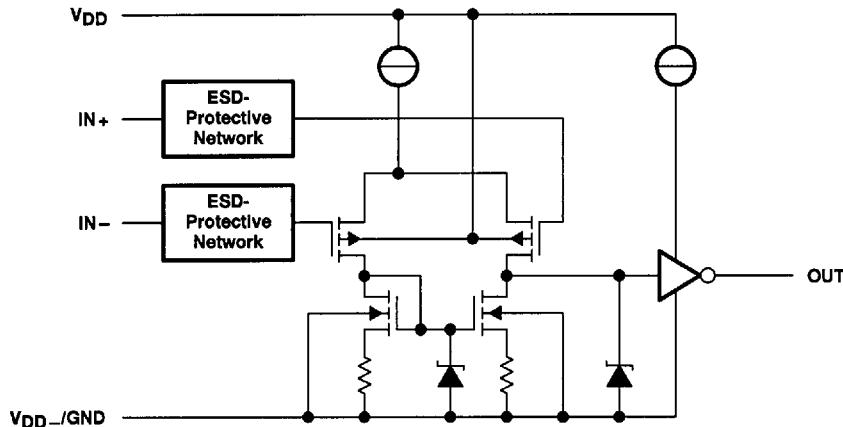equivalent schematic (each amplifier)

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265



**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B
TLC25L4Y, TLC25M4, RLC25M4A, TLC25M4B, TLC25M4Y
LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003F - JUNE 1983 - REVISED AUGUST 1994

chip information

These chips, when properly assembled, display characteristics similar to the TLC25_4C. Thermal compression or ultrasonic bonding may be used on the doped-aluminum bonding pads. Chips may be mounted with conductive epoxy or a gold-silicon preform.

BONDING PAD ASSIGNMENTS

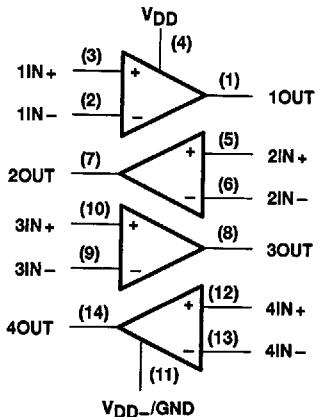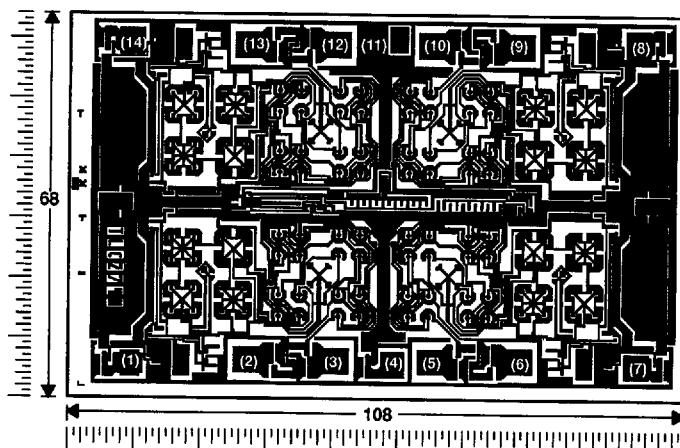

CHIP THICKNESS: 15 TYPICAL

BONDING PADS: 4 × 4 MINIMUM

T_{jmax} = 150°C

TOLERANCES ARE ±10%.

ALL DIMENSIONS ARE IN MILS.

**PIN (11) IS INTERNALLY CONNECTED
TO BACKSIDE OF CHIP.**

 **TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

■ 8961724 0093135 821 ■

**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B
 TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y
 LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003F - JUNE 1983 - REVISED AUGUST 1994

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage, V_{DD} (see Note 1)	18 V
Differential input voltage (see Note 2)	± 18 V
Input voltage range (any input)	-0.3 V to 18 V
Duration of short-circuit at (or below) 25°C free-air temperature (see Note 3)	unlimited
Continuous total dissipation	See Dissipation Rating Table
Operating free-air temperature range	0°C to 70°C
Storage temperature range	-65°C to 150°C
Lead temperature 1.6 mm (1/16 inch) from case for 10 seconds	260°C

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. All voltage values, except differential voltages, are with respect to V_{DD-}/GND .

2. Differential voltages are at IN_+ , with respect to IN_- .

3. The output may be shorted to either supply. Temperature and/or supply voltages must be limited to ensure the maximum dissipation rating is not exceeded.

DISSIPATION RATING TABLE

PACKAGE	$T_A \leq 25^\circ\text{C}$ POWER RATING	DERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$	$T_A = 70^\circ\text{C}$ POWER RATING
D	725 mW	5.8 mW/ $^\circ\text{C}$	464 mW
N	1050 mW	9.2 mW/ $^\circ\text{C}$	736 mW
PW	700 mW	5.6 mW/ $^\circ\text{C}$	448 mW

recommended operating conditions

		MIN	MAX	UNIT
Supply voltage, V_{DD}		1.4	16	V
Common-mode Input voltage, V_{IC}	$V_{DD} = 1.4$ V	0	0.2	V
	$V_{DD} = 5$ V	-0.2	4	
	$V_{DD} = 10$ V	-0.2	9	
	$V_{DD} = 16$ V	-0.2	14	
Operating free-air temperature, T_A		0	70	°C



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B
TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y**
LinCMOS™ QUAD OPERATIONAL AMPLIFIERS

SLOS003F - JUNE 1983 - REVISED AUGUST 1994

electrical characteristics at specified free-air temperature, $V_{DD} = 1.4\text{ V}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS ¹	TLC254_C			TLC25L4_C			TLC25M4_C			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO} Input offset voltage	TLC25_4C	25°C		10				10		10	
	TLC25_4AC	0°C to 70°C		12				12		12	
		28°C		5				5		5	mV
I_{IO} Input offset current	$V_O = 0.2\text{ V}, R_S = 50\ \Omega$	0°C to 70°C		6.5				6.5		6.5	
	TLC25_4BC	25°C		2				2		2	
		0°C to 70°C		3				3		3	
a_{VIO} Average temperature coefficient of input offset voltage		25°C to 70°C		1				1		1	$\mu\text{V}/^\circ\text{C}$
		25°C		1				1		1	
		0°C to 70°C		300				300		300	pA
I_B Input bias current	$V_O = 0.2\text{ V}$	25°C		1				1		1	pA
		0°C to 70°C		600				600		600	pA
		25°C		0 to 0.2				0 to 0.2		0 to 0.2	V
V_{ICR} Common-mode input voltage range		25°C		0 to 0.2				0 to 0.2		0 to 0.2	mV
		0°C to 300 mV, $R_S = 50\ \Omega$		450	700		450	700	450	700	mV
		25°C		10			20		20		V/mV
V_{OM} Peak output voltage swing [‡]	$V_{ID} = 100\text{ mV}$	25°C		450	700		450	700	450	700	mV
		VO = 100 to 300 mV, $R_S = 50\ \Omega$		25°C			25°C		25°C		
		25°C		10			20		20		
AVD Large-signal differential voltage amplification		25°C		60	77		60	77	60	77	dB
		0°C to 2 V, $V_{IC} = V_{ICR}\text{min}$		600	750		600	750	50	68	dB
		25°C		600	750		600	750	400	500	µA
I_{DD} Supply current	$V_O = 0.2\text{ V}, \text{No load}$	25°C		60	77		60	77	60	77	dB
		0°C to 2 V, $V_{IC} = V_{ICR}\text{min}$		600	750		600	750	50	68	dB
		25°C		600	750		600	750	400	500	µA

¹ All characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified. Unless otherwise noted, an output load resistor is connected from the output to ground and has the following value: for low bias, $R_L = 1\text{ M}\Omega$, for medium bias $R_L = 100\text{ k}\Omega$, and for high bias $R_L = 10\text{ k}\Omega$.
[‡] The output swings to the potential of V_{DD_GND} .

operating characteristics, $V_{DD} = 1.4\text{ V}, T_A = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	TLC254_C			TLC25L4_C			TLC25M4_C			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
SR Slew rate at unity gain	See Figure 1	0.1		0.001	0.001			0.01		0.01	$\text{V}/\mu\text{s}$
B1 Unity-gain bandwidth	$A_V = 40\text{ dB}, C_L = 10\text{ pF},$ $R_S = 50\ \Omega$ See Figure 1	12		12	12			12		12	kHz
Overshoot factor	See Figure 1	30%		35%	30%			35%		35%	



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

■ 8961724 0093137 6T4 ■

**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B
 TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y
 LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003F – JUNE 1983 – REVISED AUGUST 1994

electrical characteristics at specified free-air temperature, $V_{DD} = 5$ V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T_A^\dagger	TLC254, TLC254AC, TLC254BC			UNIT	
				MIN	TYP	MAX		
V_{IO}	Input offset voltage	TLC254C	$V_O = 1.4$ V, $R_S = 50 \Omega$,	$V_{IC} = 0$, $R_L = 10 \text{ k}\Omega$	25°C	1.1	10	mV
		TLC254AC	$V_O = 1.4$ V, $R_S = 50 \Omega$,	$V_{IC} = 0$, $R_L = 10 \text{ k}\Omega$	25°C	0.9	5	
		TLC254BC	$V_O = 1.4$ V, $R_S = 50 \Omega$,	$V_{IC} = 0$, $R_L = 10 \text{ k}\Omega$	25°C	0.34	2	
αV_{IO}		Average temperature coefficient of input offset voltage		25°C to 70°C		1.8	$\mu\text{V}/^\circ\text{C}$	
I_{IO}	Input offset current (see Note 4)	$V_O = 2.5$ V,		25°C	0.1		pA	
		$V_{IC} = 2.5$ V		70°C	7 300			
I_{IB}	Input bias current (see Note 4)	$V_O = 2.5$ V,		25°C	0.6		pA	
		$V_{IC} = 2.5$ V		70°C	40 600			
V_{ICR}	Common-mode input voltage range (see Note 5)			25°C	-0.2 to 4	-0.3 to 4.2	V	
				Full range	-0.2 to 3.5			
					0°C	3 3.8		
V_{OH}	High-level output voltage	$V_{ID} = 100$ mV,		$R_L = 10 \text{ k}\Omega$	25°C	3.2	3.8	V
					70°C	3	3.8	
					0°C	0	50	
V_{OL}	Low-level output voltage	$V_{ID} = -100$ mV,		$I_{OL} = 0$	25°C	0	50	mV
					70°C	0	50	
					0°C	4	27	
A_{vD}	Large-signal differential voltage amplification	$V_O = 0.25$ V to 2 V,		$R_L = 10 \text{ k}\Omega$	25°C	5	23	V/mV
					70°C	4	20	
					0°C	60	84	
$CMRR$	Common-mode rejection ratio	$V_{IC} = V_{ICRmin}$			25°C	65	80	dB
					70°C	60	85	
					0°C	60	94	
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{DD}/\Delta V_{IO}$)	$V_{DD} = 5$ V to 10 V,		$V_O = 1.4$ V	25°C	65	95	dB
					70°C	60	96	
					0°C	3.1	7.2	
I_{DD}	Supply current (four amplifiers)	$V_O = 2.5$ V,		$V_{IC} = 2.5$ V, No load	25°C	2.7	6.4	mA
					70°C	2.3	5.2	

† Full range is 0°C to 70°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.
 5. This range also applies to each input individually.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B
TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y
LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS03F - JUNE 1983 - REVISED AUGUST 1994

electrical characteristics at specified free-air temperature, $V_{DD} = 10$ V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	$T_A \dagger$	TLC254C, TLC254AC, TLC254BC			UNIT
				MIN	TYP	MAX	
V_{IO}	Input offset voltage	$V_O = 1.4$ V, $R_S = 50 \Omega$, $R_L = 10 \text{ k}\Omega$	25°C	1.1	10		mV
			Full range		12		
		$V_O = 1.4$ V, $R_S = 50 \Omega$, $R_L = 10 \text{ k}\Omega$	25°C	0.9	5		
			Full range		6.5		
	TLC254BC	$V_O = 1.4$ V, $R_S = 50 \Omega$, $R_L = 10 \text{ k}\Omega$	25°C	0.39	2		
			Full range		3		
αV_{IO}	Average temperature coefficient of input offset voltage		25°C to 70°C		2		$\mu\text{V}/^\circ\text{C}$
I_{IO}	Input offset current (see Note 4)	$V_O = 5$ V, $V_{IC} = 5$ V	25°C	0.1			pA
			70°C	7	300		
I_{IB}	Input bias current (see Note 4)	$V_O = 5$ V, $V_{IC} = 5$ V	25°C	0.7			pA
			70°C	50	600		
V_{ICR}	Common-mode input voltage range (see Note 5)		25°C	-0.2	-0.3		V
				to 9	to 9.2		
			Full range	-0.2			
				to 8.5			
V_{OH}	High-level output voltage	$V_{ID} = 100$ mV, $R_L = 10 \text{ k}\Omega$	0°C	7.8	8.5		V
			25°C	8	8.5		
			70°C	7.8	8.4		
V_{OL}	Low-level output voltage	$V_{ID} = -100$ mV, $I_{OL} = 0$	0°C	0	50		mV
			25°C	0	50		
			70°C	0	50		
A_{VD}	Large-signal differential voltage amplification	$V_O = 1$ V to 6 V, $R_L = 10 \text{ k}\Omega$	0°C	7.5	42		V/mV
			25°C	10	36		
			70°C	7.5	32		
$CMRR$	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$	0°C	60	88		dB
			25°C	65	85		
			70°C	60	88		
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{DD}/\Delta V_{IO}$)	$V_{DD} = 5$ V to 10 V, $V_O = 1.4$ V	0°C	60	94		dB
			25°C	65	95		
			70°C	60	96		
I_{DD}	Supply current (four amplifiers)	$V_O = 5$ V, No load	0°C	4.5	8.8		mA
			25°C	3.8	8		
			70°C	3.2	6.8		

† Full range is 0°C to 70°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

8961724 0093139 477

TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B**TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y****LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003F - JUNE 1983 - REVISED AUGUST 1994

operating characteristics, $V_{DD} = 5\text{ V}$

PARAMETER	TEST CONDITIONS	TA	TLC254C, TLC254AC, TLC254BC			UNIT
			MIN	TYP	MAX	
SR Slew rate at unity gain	$R_L = 10\text{ k}\Omega$, See Figure 1	$C_L = 20\text{ pF}$	$V_I(\text{PP}) = 1\text{ V}$	0°C	4	$\text{V}/\mu\text{s}$
				25°C	3.6	
			$V_I(\text{PP}) = 1\text{ V}$	70°C	3	
				0°C	3.1	
			$V_I(\text{PP}) = 2.5\text{ V}$	25°C	2.9	
				70°C	2.5	
V_n Equivalent input noise voltage	$f = 1\text{ kHz}$,	$R_S = 20\text{ }\Omega$,	See Figure 2	25°C	25	nV/ $\sqrt{\text{Hz}}$
BOM Maximum output-swing bandwidth	$V_O = V_{OH}$, See Figure 1	$C_L = 20\text{ pF}$,	$R_L = 10\text{ k}\Omega$,	0°C	340	kHz
				25°C	320	
				70°C	260	
B ₁ Unity-gain bandwidth	$V_I = 10\text{ mV}$,	$C_L = 20\text{ pF}$,	See Figure 1	0°C	2	MHz
				25°C	1.7	
				70°C	1.3	
ϕ_m Phase margin	$V_I = 10\text{ mV}$, See Figure 3	$f = B_1$,	$C_L = 20\text{ pF}$,	0°C	47°	
				25°C	46°	
				70°C	43°	

operating characteristics, $V_{DD} = 10\text{ V}$

PARAMETER	TEST CONDITIONS	TA	TLC254C, TLC254AC, TLC254BC			UNIT
			MIN	TYP	MAX	
SR Slew rate at unity gain	$R_L = 10\text{ k}\Omega$, See Figure 1	$C_L = 20\text{ pF}$	$V_I(\text{PP}) = 1\text{ V}$	0°C	5.9	$\text{V}/\mu\text{s}$
				25°C	5.3	
				70°C	4.3	
			$V_I(\text{PP}) = 5.5\text{ V}$	0°C	5.1	
				25°C	4.6	
				70°C	3.8	
V_n Equivalent input noise voltage	$f = 1\text{ kHz}$,	$R_S = 20\text{ }\Omega$,	See Figure 2	25°C	25	nV/ $\sqrt{\text{Hz}}$
BOM Maximum output-swing bandwidth	$V_O = V_{OH}$, See Figure 1	$C_L = 20\text{ pF}$,	$R_L = 10\text{ k}\Omega$,	0°C	220	kHz
				25°C	200	
				70°C	140	
B ₁ Unity-gain bandwidth	$V_I = 10\text{ mV}$,	$C_L = 20\text{ pF}$,	See Figure 1	0°C	2.5	MHz
				25°C	2.2	
				70°C	1.8	
ϕ_m Phase margin	$V_I = 10\text{ mV}$, See Figure 3	$f = B_1$,	$C_L = 20\text{ pF}$,	0°C	50°	
				25°C	49°	
				70°C	46°	



**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B
TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y
LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS03F - JUNE 1983 - REVISED AUGUST 1994

electrical characteristics at specified free-air temperature, $V_{DD} = 5$ V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T_A^\dagger	TLC25L4C			UNIT		
				TLC25L4AC					
V_{IO}	Input offset voltage	TLC25L4C	$V_O = 1.4$ V, $R_S = 50 \Omega$,	$V_{IC} = 0$,	$R_L = 1 M\Omega$	25°C	1.1	10	mV
		TLC25L4AC	$V_O = 1.4$ V, $R_S = 50 \Omega$,	$V_{IC} = 0$,	$R_L = 1 M\Omega$	25°C	0.9	5	
		TLC25L4BC	$V_O = 1.4$ V, $R_S = 50 \Omega$,	$V_{IC} = 0$,	$R_L = 1 M\Omega$	25°C	0.24	2	
						Full range		3	
α_{VIO}	Average temperature coefficient of input offset voltage					25°C to 70°C	1.1		$\mu V/^{\circ}C$
I_{IO}	Input offset current (see Note 4)	$V_O = 2.5$ V,	$V_{IC} = 2.5$ V	25°C	0.1				pA
				70°C		7	300		
I_{IB}	Input bias current (see Note 4)	$V_O = 2.5$ V,	$V_{IC} = 2.5$ V	25°C	0.6			pA	
				70°C		40	600		
V_{ICR}	Common-mode input voltage range (see Note 5)			25°C	-0.2 to 4	-0.3 to 4.2		V	
				Full range		-0.2 to 3.5			
V_{OH}	High-level output voltage	$V_{ID} = 100$ mV,	$R_L = 1 M\Omega$	0°C	3	4.1		V	
				25°C	3.2	4.1			
				70°C	3	4.2			
V_{OL}	Low-level output voltage	$V_{ID} = -100$ mV,	$I_{OL} = 0$	0°C	0	50		mV	
				25°C	0	50			
				70°C	0	50			
AVD	Large-signal differential voltage amplification	$V_O = 0.25$ V to 2 V,	$R_L = 1 M\Omega$	0°C	50	680		V/mV	
				25°C	50	520			
				70°C	50	380			
$CMRR$	Common-mode rejection ratio	$V_{IC} = V_{ICRmin}$		0°C	60	95		dB	
				25°C	65	94			
				70°C	60	95			
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{DD}/\Delta V_{IO}$)	$V_{DD} = 5$ V to 10 V,	$V_O = 1.4$ V	0°C	60	97		dB	
				25°C	70	98			
				70°C	60	97			
I_{DD}	Supply current (four amplifiers)	$V_O = 2.5$ V,	No load	0°C		48	84	μA	
				25°C		40	68		
				70°C		31	56		

† Full range is 0°C to 70°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.
5. This range also applies to each input individually.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

■ 8961724 0093141 025 ■

**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B
 TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y
 LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003F - JUNE 1983 - REVISED AUGUST 1994

electrical characteristics at specified free-air temperature, $V_{DD} = 10$ V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T_A^\dagger	TLC25L4C TLC25L4AC TLC25L4BC			UNIT	
				MIN	TYP	MAX		
V_{IO}	Input offset voltage	TLC25L4C	$V_O = 1.4$ V, $R_S = 50 \Omega$,	$V_{IC} = 0$, $R_L = 1 M\Omega$	25°C	1.1	10	mV
					Full range		12	
		TLC25L4AC	$V_O = 1.4$ V, $R_S = 50 \Omega$,	$V_{IC} = 0$, $R_L = 1 M\Omega$	25°C	0.9	5	
		TLC25L4BC	$V_O = 1.4$ V, $R_S = 50 \Omega$,	$V_{IC} = 0$, $R_L = 1 M\Omega$	25°C	0.26	2	
					Full range		3	
	α_{VIO}	Average temperature coefficient of input offset voltage			25°C to 70°C		1	$\mu V/^\circ C$
I_{IO}	Input offset current (see Note 4)		$V_O = 5$ V,	$V_{IC} = 5$ V	25°C	0.1		pA
					70°C	7	300	
I_{IB}	Input bias current (see Note 4)		$V_O = 5$ V,	$V_{IC} = .5$ V	25°C	0.7		pA
					70°C	50	600	
V_{ICR}	Common-mode input voltage range (see Note 5)				25°C	-0.2 to 9	-0.3 to 9.2	V
					Full range	-0.2 to 8.5		
V_{OH}	High-level output voltage		$V_{ID} = 100$ mV,	$R_L = 1 M\Omega$	0°C	7.8	8.9	V
					25°C	8	8.9	
					70°C	7.8	8.9	
V_{OL}	Low-level output voltage		$V_{ID} = -100$ mV,	$I_{OL} = 0$	0°C	0	50	mV
					25°C	0	50	
					70°C	0	50	
AVD	Large-signal differential voltage amplification		$V_O = 1$ V to 6 V,	$R_L = 1 M\Omega$	0°C	50	1025	V/mV
					25°C	50	870	
					70°C	50	660	
$CMRR$	Common-mode rejection ratio		$V_{IC} = V_{ICRmin}$		0°C	60	97	dB
					25°C	65	97	
					70°C	60	97	
$kSVR$	Supply-voltage rejection ratio ($\Delta V_{DD}/\Delta V_{IO}$)		$V_{DD} = 5$ V to 10 V,	$V_O = 1.4$ V	0°C	60	97	dB
					25°C	70	97	
					70°C	60	98	
I_{DD}	Supply current (four amplifiers)		$V_O = 5$ V, No load	$V_{IC} = 5$ V,	0°C	72	132	μA
					25°C	57	92	
					70°C	44	80	

† Full range is 0°C to 70°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.
 5. This range also applies to each input individually.

**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B
TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y
LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003F - JUNE 1983 - REVISED AUGUST 1994

operating characteristics, $V_{DD} = 5\text{ V}$

PARAMETER	TEST CONDITIONS	T_A	TLC25L4C			UNIT	
			TLC25L4AC				
			TLC25L4BC				
SR	$R_L = 1\text{ M}\Omega$, See Figure 1	$C_L = 20\text{ pF}$,	0°C	0.04		V/ μs	
			25°C	0.03			
			70°C	0.03			
			0°C	0.03			
			25°C	0.03			
		$V_I(\text{PP}) = 2.5\text{ V}$	70°C	0.02			
			0°C	0.04			
			25°C	0.03			
			70°C	0.02			
			0°C	0.03			
V_n	Equivalent input noise voltage	$f = 1\text{ kHz}$, $R_S = 20\text{ }\Omega$, See Figure 2	25°C	70	nV/ $\sqrt{\text{Hz}}$		
BOM	$V_O = V_{OH}$, See Figure 1	$C_L = 20\text{ pF}$, $R_L = 1\text{ M}\Omega$,	0°C	6		kHz	
			25°C	5			
			70°C	4.5			
			0°C	100			
B ₁	Unity-gain bandwidth	$V_I = 10\text{ mV}$, $C_L = 20\text{ pF}$, See Figure 1	25°C	85		kHz	
			70°C	65			
			0°C	125			
ϕ_m	Phase margin	$V_I = 10\text{ mV}$, $f = B_1$, See Figure 3	25°C	34°		kHz	
			70°C	30°			
			0°C	40°			

operating characteristics, $V_{DD} = 10\text{ V}$

PARAMETER	TEST CONDITIONS	T_A	TLC25L4C			UNIT	
			TLC25L4AC				
			TLC25L4BC				
SR	$R_L = 1\text{ M}\Omega$, See Figure 1	$C_L = 20\text{ pF}$,	0°C	0.05		V/ μs	
			25°C	0.05			
			70°C	0.04			
			0°C	0.05			
			25°C	0.04			
		$V_I(\text{PP}) = 5.5\text{ V}$	70°C	0.04			
			0°C	0.05			
			25°C	0.04			
			70°C	0.04			
			0°C	1.3			
V_n	Equivalent input noise voltage	$f = 1\text{ kHz}$, $R_S = 20\text{ }\Omega$, See Figure 2	25°C	70	nV/ $\sqrt{\text{Hz}}$		
BOM	$V_O = V_{OH}$, See Figure 1	$C_L = 20\text{ pF}$, $R_L = 1\text{ M}\Omega$,	0°C	1.3		kHz	
			25°C	1			
			70°C	0.9			
			0°C	125			
B ₁	Unity-gain bandwidth	$V_I = 10\text{ mV}$, $C_L = 20\text{ pF}$, See Figure 1	25°C	110		kHz	
			70°C	90			
			0°C	40°			
			25°C	38°			
ϕ_m	Phase margin	$V_I = 10\text{ mV}$, $f = B_1$, See Figure 3	70°C	34°		kHz	



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

8961724 0093143 9T8

TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B

TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y

LinCMOS™ QUAD OPERATIONAL AMPLIFIERS

SLOS003F - JUNE 1983 - REVISED AUGUST 1994

electrical characteristics at specified free-air temperature, $V_{DD} = 5$ V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T_A^\dagger	TLC25M4C TLC25M4AC TLC25M4BC			UNIT
				MIN	TYP	MAX	
V_{IO}	Input offset voltage TLC25M4C	$V_O = 1.4$ V, $R_S = 50 \Omega$,	$V_{IC} = 0$, $R_L = 100 \text{ k}\Omega$	25°C	1.1	10	mV
				Full range		12	
				25°C	0.9	5	
	TLC25M4AC	$V_O = 1.4$ V, $R_S = 50 \Omega$,	$V_{IC} = 0$, $R_L = 100 \text{ k}\Omega$	Full range		6.5	
				25°C	0.25	2	
	TLC25M4BC	$V_O = 1.4$ V, $R_S = 50 \Omega$,	$V_{IC} = 0$, $R_L = 100 \text{ k}\Omega$	Full range		3	
$\approx V_{IO}$	Average temperature coefficient of input offset voltage			25°C to 70°C		1.7	$\mu\text{V}/^\circ\text{C}$
I_{IO}	Input offset current (see Note 4)	$V_O = 2.5$ V,	$V_{IC} = 2.5$ V	25°C	0.1		pA
				70°C	7	300	
I_{IB}	Input bias current (see Note 4)	$V_O = 2.5$ V,	$V_{IC} = 2.5$ V	25°C	0.6		pA
				70°C	40	600	
V_{ICR}	Common-mode input voltage range (see Note 5)		25°C	-0.2	-0.3		V
				to 4	to 4.2		
			Full range	-0.2			V
					to 3.5		
V_{OH}	High-level output voltage	$V_{ID} = 100 \text{ mV}$,	$R_L = 100 \text{ k}\Omega$	0°C	3	3.9	V
				25°C	3.2	3.9	
				70°C	3	4	
V_{OL}	Low-level output voltage	$V_{ID} = -100 \text{ mV}$,	$I_{OL} = 0$	0°C	0	50	mV
				25°C	0	50	
				70°C	0	50	
A_{VD}	Large-signal differential voltage amplification	$V_O = 0.25$ V to 2 V,	$R_L = 100 \text{ k}\Omega$	0°C	15	200	V/mV
				25°C	25	170	
				70°C	15	140	
$CMRR$	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$		0°C	60	91	dB
				25°C	65	91	
				70°C	60	92	
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{DD}/\Delta V_{IO}$)	$V_{DD} = 5$ V to 10 V,	$V_O = 1.4$ V	0°C	60	92	dB
				25°C	70	93	
				70°C	60	94	
I_{DD}	Supply current (four amplifiers)	$V_O = 2.5$ V, No load	$V_{IC} = 2.5$ V,	0°C	500	1280	μA
				25°C	420	1120	
				70°C	340	880	

† Full range is 0°C to 70°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B
TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y**
LinCMOS™ QUAD OPERATIONAL AMPLIFIERS

SLOS003F - JUNE 1983 - REVISED AUGUST 1994

electrical characteristics at specified free-air temperature, $V_{DD} = 10$ V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	TA†	TLC25M4C TLC25M4AC TLC25M4BC			UNIT
				MIN	TYP	MAX	
V_{IO}	Input offset voltage	$V_O = 1.4$ V, $R_S = 50 \Omega$,	$V_{IC} = 0$, $R_L = 100 \text{ k}\Omega$	25°C	1.1	10	mV
		$V_O = 1.4$ V, $R_S = 50 \Omega$,	$V_{IC} = 0$, $R_L = 100 \text{ k}\Omega$	25°C	0.9	5	
		$V_O = 1.4$ V, $R_S = 50 \Omega$,	$V_{IC} = 0$, $R_L = 100 \text{ k}\Omega$	25°C	0.26	2	
	TLC25M4BC	$V_O = 1.4$ V, $R_S = 50 \Omega$,	$V_{IC} = 0$, $R_L = 100 \text{ k}\Omega$	Full range		3	
		$V_O = 5$ V,	$V_{IC} = 5$ V	25°C	0.1		
		$V_O = 5$ V,	$V_{IC} = 5$ V	70°C	7	300	
I_{IB}	Input bias current (see Note 4)	$V_O = 5$ V,	$V_{IC} = 5$ V	25°C	0.7		pA
		$V_O = 5$ V,	$V_{IC} = 5$ V	70°C	50	600	
				25°C	-0.2	-0.3 to 9	
	Common-mode input voltage range (see Note 5)			Full range	-0.2	9.2 to 8.5	
				25°C	to		
				70°C	7.8	8.7	
V_{OH}	High-level output voltage	$V_{ID} = 100$ mV,	$R_L = 100 \text{ k}\Omega$	0°C	7.8	8.7	V
				25°C	8	8.7	
				70°C	7.8	8.7	
	Low-level output voltage	$V_{ID} = -100$ mV,	$I_{OL} = 0$	0°C	0	50	
				25°C	0	50	
				70°C	0	50	
A_{VD}	Large-signal differential voltage amplification	$V_O = 1$ V to 6 V,	$R_L = 100 \text{ k}\Omega$	0°C	15	320	V/mV
				25°C	25	275	
				70°C	15	230	
	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$		0°C	60	94	
				25°C	65	94	
				70°C	60	94	
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{DD}/\Delta V_{IO}$)	$V_{DD} = 5$ V to 10 V,	$V_O = 1.4$ V	0°C	60	92	dB
				25°C	70	93	
				70°C	60	94	
	Supply current (four amplifiers)	$V_O = 5$ V, No load	$V_{IC} = 5$ V,	0°C	690	1600	
				25°C	570	1200	
				70°C	440	1120	

† Full range is 0°C to 70°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.
5. This range also applies to each input individually.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

■ 8961724 0093145 770 ■

TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B**TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y****LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS003F - JUNE 1983 - REVISED AUGUST 1994

operating characteristics, $V_{DD} = 5\text{ V}$

PARAMETER	TEST CONDITIONS	TA	TLC25M4C TLC25M4AC TLC25M4BC			UNIT
			MIN	TYP	MAX	
			0°C	0.46		V/ μs
SR Slew rate at unity gain	$R_L = 100\text{ k}\Omega$, $C_L = 20\text{ pF}$, See Figure 1	$V_I(\text{PP}) = 1\text{ V}$	25°C	0.43		V/ μs
			70°C	0.36		V/ μs
		$V_I(\text{PP}) = 2.5\text{ V}$	0°C	0.43		
			25°C	0.40		
V_n Equivalent input noise voltage	$f = 1\text{ kHz}$, $R_S = 20\text{ }\Omega$, See Figure 2	25°C	70°C	0.34		nV/ $\sqrt{\text{Hz}}$
			0°C	0.43		
			25°C	0.40		
BOM Maximum output-swing bandwidth	$V_O = V_{OH}$, $C_L = 20\text{ pF}$, $R_L = 100\text{ k}\Omega$, See Figure 1	70°C	0°C	60		kHz
			25°C	55		
			70°C	50		
B_1 Unity-gain bandwidth	$V_I = 10\text{ mV}$, $C_L = 20\text{ pF}$, See Figure 1	70°C	0°C	610		kHz
			25°C	525		
			70°C	400		
ϕ_m Phase margin	$V_I = 10\text{ mV}$, $f = B_1$, $C_L = 20\text{ pF}$, See Figure 3	70°C	0°C	41°		
			25°C	40°		
			70°C	39°		

operating characteristics, $V_{DD} = 10\text{ V}$

PARAMETER	TEST CONDITIONS	TA	TLC25M4C TLC25M4AC TLC25M4BC			UNIT
			MIN	TYP	MAX	
			0°C	0.67		V/ μs
SR Slew rate at unity gain	$R_L = 100\text{ k}\Omega$, $C_L = 20\text{ pF}$, See Figure 1	$V_I(\text{PP}) = 1\text{ V}$	25°C	0.62		
			70°C	0.51		
		$V_I(\text{PP}) = 5.5\text{ V}$	0°C	0.61		
			25°C	0.56		
V_n Equivalent input noise voltage	$f = 1\text{ kHz}$, $R_S = 20\text{ }\Omega$, See Figure 2	70°C	0°C	0.46		nV/ $\sqrt{\text{Hz}}$
			25°C	32		
			70°C	30		
BOM Maximum output-swing bandwidth	$V_O = V_{OH}$, $C_L = 20\text{ pF}$, $R_L = 100\text{ k}\Omega$, See Figure 1	70°C	0°C	40		kHz
			25°C	35		
			70°C	30		
B_1 Unity-gain bandwidth	$V_I = 10\text{ mV}$, $C_L = 20\text{ pF}$, See Figure 1	70°C	0°C	710		kHz
			25°C	635		
			70°C	510		
ϕ_m Phase margin	$V_I = 10\text{ mV}$, $f = B_1$, $C_L = 20\text{ pF}$, See Figure 3	70°C	0°C	44°		
			25°C	43°		
			70°C	42°		



POST OFFICE BOX 5012 • DALLAS, TEXAS 75265

**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B
TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y**
LinCMOS™ QUAD OPERATIONAL AMPLIFIERS

SLOS003F - JUNE 1983 - REVISED AUGUST 1994

electrical characteristics, $V_{DD} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS	TLC254Y			TLC25L4Y			TLC25M4Y			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage $V_O = 1.4 \text{ V}$, $V_{IC} = 0 \text{ V}$, $R_S = 50 \Omega$, See Note 6		1.1	10		1.1	10		1.1	10	mV
α_{VIO}	Average temperature coefficient of input offset voltage			1.8			1.1			1.7	$\mu\text{V}/^\circ\text{C}$
I_{IO}	Input offset current (see Note 4)	$V_O = V_{DD}/2$, $V_{IC} = V_{DD}/2$		0.1			0.1			0.1	pA
I_{IB}	Input bias current (see Note 4)	$V_O = V_{DD}/2$, $V_{IC} = V_{DD}/2$		0.6			0.6			0.6	pA
V_{ICR}	Common-mode input voltage range (see Note 5)		-0.2 to 4	-0.3 to 4.2		-0.2 to 4	-0.3 to 4.2		-0.2 to 4	-0.3 to 4.2	V
V_{OH}	High-level output voltage	$V_{ID} = 100 \text{ mV}$, $R_L = 100 \text{ k}\Omega$	3.2	3.8		3.2	4.1		3.2	3.9	V
V_{OL}	Low-level output voltage	$V_{ID} = -100 \text{ mV}$, $I_{OL} = 0$		0 50		0 50		0 50		0 50	mV
A_{VD}	Large-signal differential voltage amplification	$V_O = 0.25 \text{ V}$, See Note 6	5	23		50	520		25	170	V/mV
CMRR	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$	65	80		65	94		65	91	dB
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{DD}/\Delta V_{IO}$)	$V_{DD} = 5 \text{ V to } 10 \text{ V}$, $V_O = 1.4 \text{ V}$	65	95		70	97		70	93	dB
I_{DD}	Supply current	$V_O = V_{DD}/2$, $V_{IC} = V_{DD}/2$, No load		2.7 6.4		0.04 0.068			0.42 1.12		mA

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.

6. For low-bias mode, $R_L = 1 \text{ M}\Omega$, for medium-bias mode, $R_L = 100 \text{ k}\Omega$, and for high-bias mode, $R_L = 10 \text{ k}\Omega$.

operating characteristics, $V_{DD} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	TLC254Y			TLC25L4Y			TLC25M4Y			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
SR	$C_L = 20 \text{ pF}$, See Note 6	$V_I(\text{PP}) = 1 \text{ V}$		3.6			0.03		0.43		$\text{V}/\mu\text{s}$
		$V_I(\text{PP}) = 2.5 \text{ V}$		2.9			0.03		0.40		
V_n	Equivalent input noise voltage $f = 1 \text{ kHz}$, $R_S = 20 \Omega$			2.5			70		32		$\text{nV}/\sqrt{\text{Hz}}$
BOM	Maximum output-swing bandwidth $V_O = V_{OH}$, $R_L = 10 \text{ k}\Omega$	$C_L = 20 \text{ pF}$,		320			5		55		kHz
B_1	Unity-gain bandwidth $V_I = 10 \text{ mV}$, $C_L = 20 \text{ pF}$			1.7			0.085		0.525		MHz
ϕ_m	Phase margin $f = B_1$, $C_L = 20 \text{ pF}$	$V_I = 10 \text{ mV}$,		46°			34°		40°		

NOTE 6: For low-bias mode, $R_L = 1 \text{ M}\Omega$, for medium-bias mode, $R_L = 100 \text{ k}\Omega$, and for high-bias mode, $R_L = 10 \text{ k}\Omega$.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B

TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y

LinCMOST™ QUAD OPERATIONAL AMPLIFIERS

SLOS003F - JUNE 1983 - REVISED AUGUST 1994

PARAMETER MEASUREMENT INFORMATION

single-supply versus split-supply test circuits

Because the TLC25_4, TLC25_4A, and TLC25_4B are optimized for single-supply operation, circuit configurations used for the various tests often present some inconvenience since the input signal, in many cases, must be offset from ground. This inconvenience can be avoided by testing the device with split supplies and the output load tied to the negative rail. A comparison of single-supply versus split-supply test circuits is shown below. The use of either circuit gives the same result.

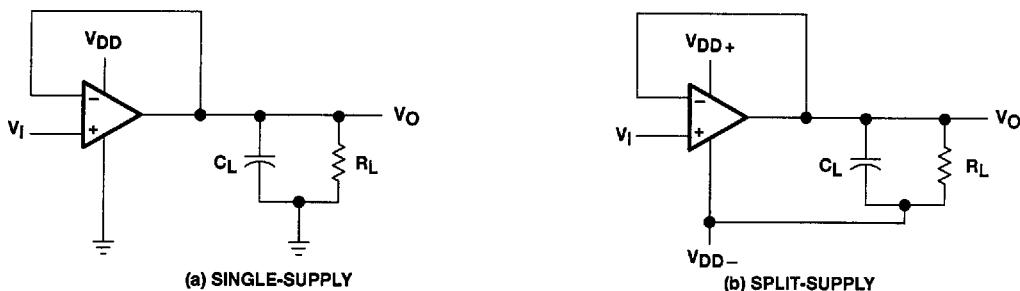


Figure 1. Unity-Gain Amplifier

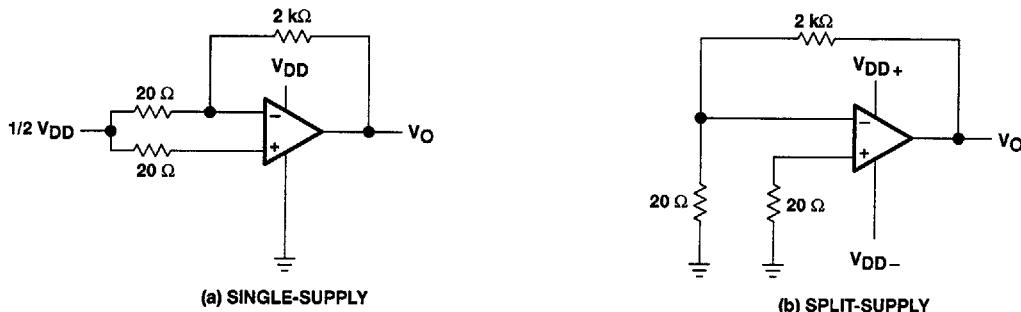


Figure 2. Noise-Test Circuit

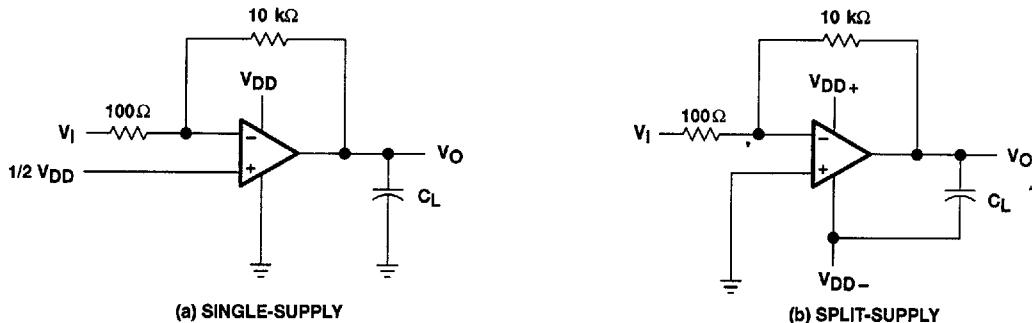


Figure 3. Gain-of-100 Inverting Amplifier



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B
 TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y
 LinCMOS™ QUAD OPERATIONAL AMPLIFIERS**

SLOS03F – JUNE 1983 – REVISED AUGUST 1994

TYPICAL CHARACTERISTICS

Table of Graphs

				FIGURE
I_{DD}	Supply current		vs Supply voltage vs Free-air temperature	
A_{VD}	Large-signal differential voltage amplification	Low bias	vs Frequency	6
		Medium bias	vs Frequency	7
		High bias	vs Frequency	8
	Phase shift	Low bias	vs Frequency	6
		Medium bias	vs Frequency	7
		High bias	vs Frequency	8

**SUPPLY CURRENT
VS
SUPPLY VOLTAGE**

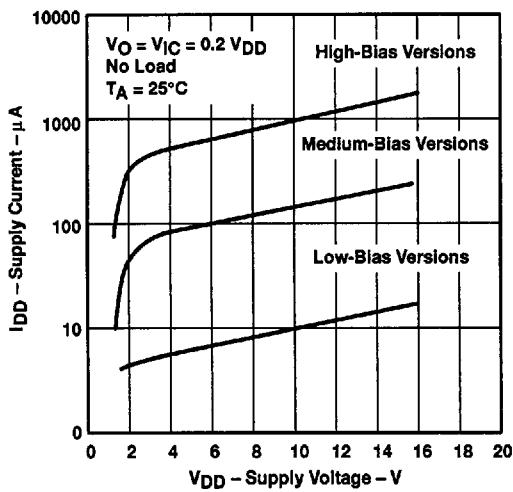


Figure 4

**SUPPLY CURRENT
VS
FREE-AIR TEMPERATURE**

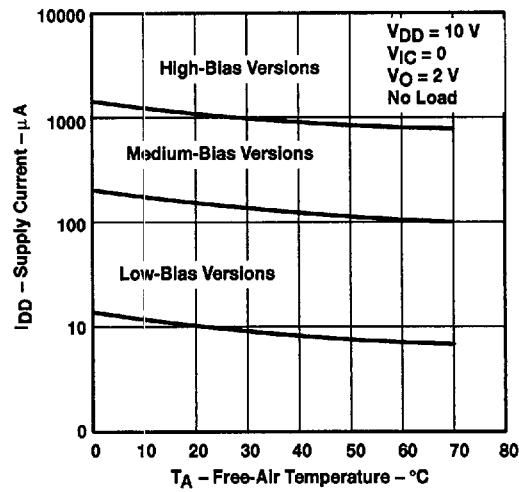


Figure 5

TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B

TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y

LinCMOS™ QUAD OPERATIONAL AMPLIFIERS

SLOS003F - JUNE 1983 - REVISED AUGUST 1994

TYPICAL CHARACTERISTICS

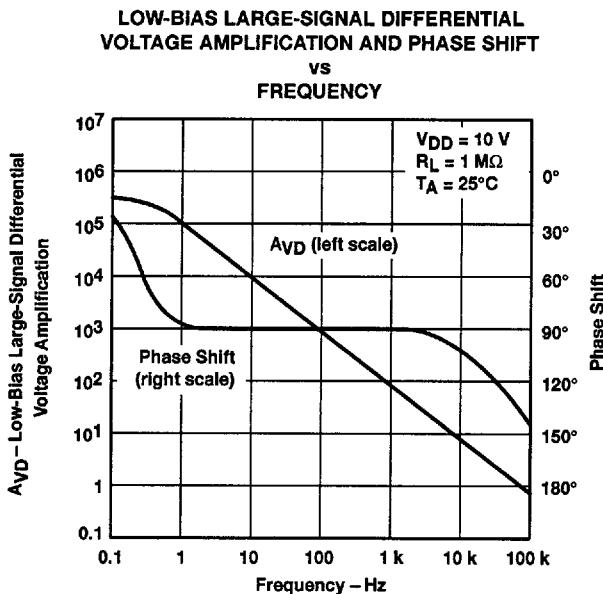


Figure 6

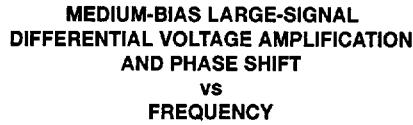


Figure 7

TYPICAL CHARACTERISTICS

**HIGH-BIAS LARGE-SIGNAL
DIFFERENTIAL VOLTAGE AMPLIFICATION
AND PHASE SHIFT
vs
FREQUENCY**

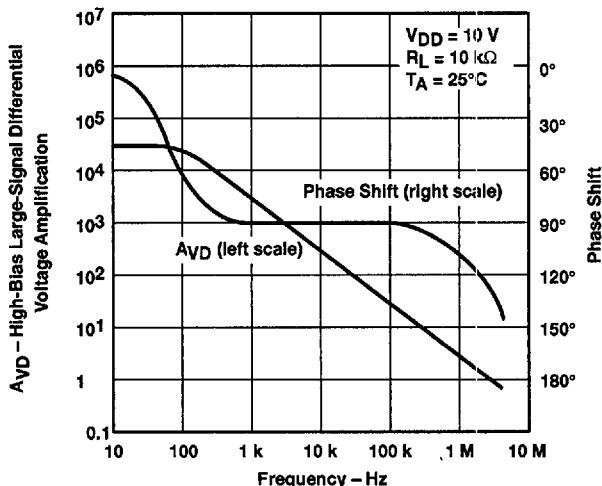


Figure 8

TLC254, TLC254A, TLC254B, TLC254Y, TLC25L4, TLC25L4A, TLC25L4B

TLC25L4Y, TLC25M4, TLC25M4A, TLC25M4B, TLC25M4Y

LInCMOS™ QUAD OPERATIONAL AMPLIFIERS

SLOS003F - JUNE 1983 - REVISED AUGUST 1994

APPLICATION INFORMATION

latch-up avoidance

Junction-isolated CMOS circuits have an inherent parasitic PNPN structure that can function as an SCR. Under certain conditions, this SCR may be triggered into a low-impedance state, resulting in excessive supply current. To avoid such conditions, no voltage greater than 0.3 V beyond the supply rails should be applied to any pin. In general, the operational amplifiers supplies should be established simultaneously with, or before, application of any input signals.

output stage considerations

The amplifier's output stage consists of a source-follower-connected pullup transistor and an open-drain pulldown transistor. The high-level output voltage (V_{OH}) is virtually independent of the I_{DD} selection and increases with higher values of V_{DD} and reduced output loading. The low-level output voltage (V_{OL}) decreases with reduced output current and higher input common-mode voltage. With no load, V_{OL} is essentially equal to the potential of V_{DD-}/GND .

supply configurations

Even though the TLC25_4C series is characterized for single-supply operation, they can be used effectively in a split-supply configuration if the input common-mode voltage (V_{ICR}), output swing (V_{OL} and V_{OH}), and supply voltage limits are not exceeded.

circuit layout precautions

Whenever extremely high circuit impedances are used, care must be exercised in layout, construction, board cleanliness, and supply filtering to avoid hum and noise pickup as well as excessive dc leakages.