

UTC LM2937-XX LINEAR INTEGRATED CIRCUIT

500mA LOW DROPOUT VOLTAGE REGULATOR

DESCRIPTION


The UTC LM2937-XX is a positive voltage regulator capable of supplying up to 500mA of load current. The use of a PNP power transistor provides a low dropout voltage characteristic. With a load current of 500mA the minimum input to output voltage differential required for the output to remain in regulation is typically 0.5V(1V guaranteed maximum over the full operating temperature range). Special circuitry has been incorporated to minimize the quiescent current to typically only 10mA with a full 500mA load current when the input to output voltage differential is greater than 3V.

The UTC LM2937-XX requires an output bypass capacitor for stability. As with most low dropout regulators, the ESR of this capacitor remains a critical design parameter, but the LM2937 includes special compensation circuitry that relaxes ESR requirements. The UTC LM2937-XX is stable for all ESR below 3Ω . This allows the use of low ESR chip capacitors.

Ideally suited for automotive applications, the UTC LM2937-XX will protect itself and any load circuitry from reverse battery connections, two-battery jumps and up to +60V/-50V load dump transients. Familiar regulator features such as short circuit and thermal shutdown protection are also built in.

FEATURES

- *Fully specified for operation over -40°C to +125°C
- *Output current in excess of 500mA
- *Output trimmed for 5% tolerance under all operating conditions
- *Typical dropout voltage of 0.5V at full rated load current
- *Wide output capacitor ESR range, up to 3Ω
- *Reverse battery protection
- *Internal short circuit and thermal overload protection
- *60V input transient protection
- *Mirror image insertion protection
- *Built-in ON/OFF control function

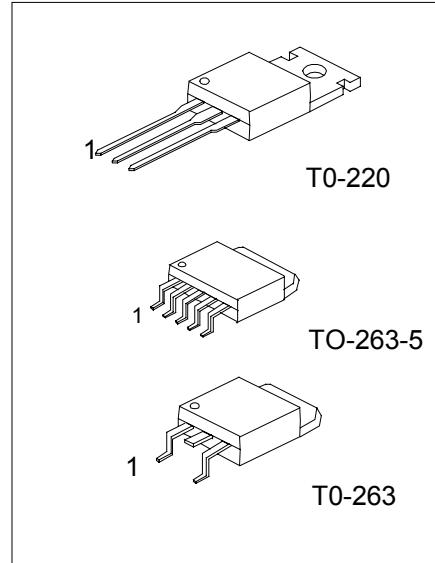


TO-220/TO263 : 1:Input 2:GND 3:Output

TO-263-5 : 1: N/C 2: ON/OFF 3: GND


4: Input 5: Output

UTC LM2937-XX LINEAR INTEGRATED CIRCUIT

TYPICAL APPLICATION

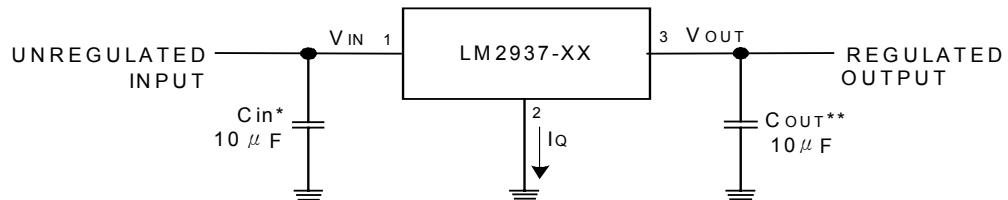

ON/OFF CONTROL APPLICATION

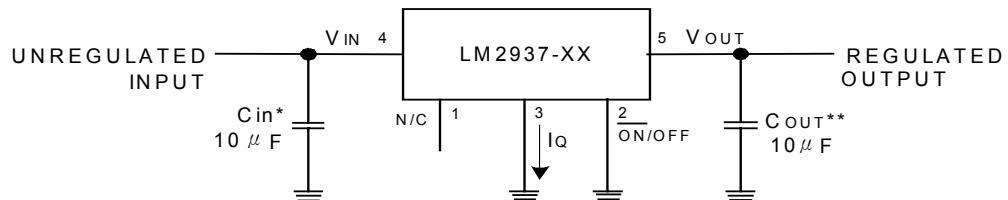

* Required if the regulator is located more than 3 inches from the power supply filter capacitors.

**Required for stability. C_{out} must be at least 10 μF (over the full expected operating temperature range) and located as close as possible to the regulator. The equivalent series resistance, ESR, of this capacitor may be as high as 3 Ω .

ABSOLUTE MAXIMUM RATINGS (Note 1)

| PARAMETER | SYMBOL | RATING | UNIT |
|-------------------------------------|-----------|--------------------|------|
| Internal Power Dissipation (Note 2) | | Internally limited | |
| Input Voltage | V_{IN} | 26 | V |
| Storage temperature Range | T_{STG} | -65 ~ +150 | °C |
| Maximum Junction Temperature | T_J | 150 | °C |

LM2937-3.3V ELECTRICAL CHARACTERISTICS

($V_{IN}=V_{NOM}+5V$, $I_Q=500mA$, $C_{out}=10\mu F$, $T_J=T_A=25^\circ C$, unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT. |
|----------------------|--------------|--|------|------|------|---------------|
| Output Voltage | V_o | $5mA \leq I_o \leq 500mA$ | 3.21 | 3.30 | 3.39 | V |
| Line Regulation | ΔV_o | $V_o + 2V \leq V_{IN} \leq 26V$, $I_o = 5mA$ | | 9 | 30 | mV |
| Load Regulation | ΔV_o | $5mA \leq I_o \leq 500mA$ | | 3 | 30 | mV |
| Quiescent Current | I_Q | $(V_o + 2V) \leq V_{IN} \leq 26V$, $I_o = 5mA$ $V_{IN} = V_o + 5V$, $I_o = 500mA$ | 2 | 10 | mA | |
| Output Noise Voltage | V_{NOISE} | $10Hz - 100kHz$, $I_o = 5mA$ | 100 | | | μV_{rms} |
| Long Term Stability | | 1000Hrs | | 12 | | mV |

UTC UNISONIC TECHNOLOGIES CO., LTD. 2

UTC LM2937-XX LINEAR INTEGRATED CIRCUIT

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT. |
|---------------------------------|------------|--|------|------|------|-------|
| Dropout Voltage | V_D | $I_o=500\text{mA}$ | | 0.5 | 1.0 | V |
| | | $I_o=50\text{mA}$ | | 110 | 250 | mV |
| Short Circuit Current | I_S | | 0.6 | 1.0 | | A |
| Peak Line Transient Voltage | T_{in} | $t_f \leq 100\text{ms}, R_L = 100\Omega$ | 60 | 75 | | V |
| Reverse DC Input Voltage | V_{Rin} | $V_o \geq -0.6\text{V}, R_L = 100\Omega$ | -15 | -30 | | V |
| Reverse Transient Input Voltage | V_{TRRI} | $t_f < 1\text{ms}, R_L = 100\Omega$ | -50 | -75 | | V |

LM2937-5.0V ELECTRICAL CHARACTERISTICS

($V_{IN}=V_{NOM}+5\text{V}, I_o=500\text{mA}, C_{out}=10\mu\text{F}, T_j=T_A=25^\circ\text{C}$, unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT. |
|---------------------------------|--------------|---|------|------|------|------------------|
| Output Voltage | V_o | $5\text{mA} \leq I_o \leq 500\text{mA}$ | 4.85 | 5.00 | 5.15 | V |
| | | $V_o + 2\text{V} \leq V_{IN} \leq 26\text{V}, I_o = 5\text{mA}$ | | 15 | 50 | mV |
| Line Regulation | ΔV_o | $5\text{mA} \leq I_o \leq 500\text{mA}$ | | 5 | 50 | mV |
| | | $(V_o + 2\text{V}) \leq V_{IN} \leq 26\text{V}, I_o = 5\text{mA}$ | | 2 | 10 | mA |
| Quiescent Current | I_Q | $V_{IN} = V_o + 5\text{V}, I_o = 500\text{mA}$ | | 10 | 20 | mA |
| | | $10\text{Hz}-100\text{kHz}, I_o = 5\text{mA}$ | | 150 | | μVRMS |
| Output Noise Voltage | V_{NOISE} | | | 20 | | mV |
| Long Term Stability | | 1000Hrs | | | | |
| Dropout Voltage | V_D | $I_o = 500\text{mA}$ | 0.5 | 1.0 | | V |
| | | $I_o = 50\text{mA}$ | | 110 | 250 | mV |
| Short Circuit Current | I_S | | 0.6 | 1.0 | | A |
| Peak Line Transient Voltage | T_{in} | $t_f \leq 100\text{ms}, R_L = 100\Omega$ | 60 | 75 | | V |
| Reverse DC Input Voltage | V_{Rin} | $V_o \geq -0.6\text{V}, R_L = 100\Omega$ | -15 | -30 | | V |
| Reverse Transient Input Voltage | V_{TRRI} | $t_f < 1\text{ms}, R_L = 100\Omega$ | -50 | -75 | | V |

LM2937-8.0V ELECTRICAL CHARACTERISTICS

($V_{IN}=V_{NOM}+5\text{V}, I_o=500\text{mA}, C_{out}=10\mu\text{F}, T_j=T_A=25^\circ\text{C}$, unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT. |
|---------------------------------|--------------|---|------|------|------|------------------|
| Output Voltage | V_o | $5\text{mA} \leq I_o \leq 500\text{mA}$ | 7.76 | 8.00 | 8.24 | V |
| | | $V_o + 2\text{V} \leq V_{IN} \leq 26\text{V}, I_o = 5\text{mA}$ | | 24 | 80 | mV |
| Line Regulation | ΔV_o | $5\text{mA} \leq I_o \leq 500\text{mA}$ | | 8 | 80 | mV |
| | | $(V_o + 2\text{V}) \leq V_{IN} \leq 26\text{V}, I_o = 5\text{mA}$ | | 2 | 10 | mA |
| Quiescent Current | I_Q | $V_{IN} = V_o + 5\text{V}, I_o = 500\text{mA}$ | | 10 | 20 | mA |
| | | $10\text{Hz}-100\text{kHz}, I_o = 5\text{mA}$ | | 240 | | μVRMS |
| Output Noise Voltage | V_{NOISE} | | | 32 | | mV |
| Long Term Stability | | 1000Hrs | | | | |
| Dropout Voltage | V_D | $I_o = 500\text{mA}$ | 0.5 | 1.0 | | V |
| | | $I_o = 50\text{mA}$ | | 110 | 250 | mV |
| Short Circuit Current | I_S | | 0.6 | 1.0 | | A |
| Peak Line Transient Voltage | T_{in} | $t_f \leq 100\text{ms}, R_L = 100\Omega$ | 60 | 75 | | V |
| Reverse DC Input Voltage | V_{Rin} | $V_o \geq -0.6\text{V}, R_L = 100\Omega$ | -15 | -30 | | V |
| Reverse Transient Input Voltage | V_{TRRI} | $t_f < 1\text{ms}, R_L = 100\Omega$ | -50 | -75 | | V |

LM2937-10.0V ELECTRICAL CHARACTERISTICS

($V_{IN}=V_{NOM}+5\text{V}, I_o=500\text{mA}, C_{out}=10\mu\text{F}, T_j=T_A=25^\circ\text{C}$, unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT. |
|----------------|--------|---|------|-------|-------|-------|
| Output Voltage | V_o | $5\text{mA} \leq I_o \leq 500\text{mA}$ | 9.70 | 10.00 | 10.30 | V |
| | | $V_o + 2\text{V} \leq V_{IN} \leq 26\text{V}, I_o = 5\text{mA}$ | | 30 | 100 | mV |

UTC LM2937-XX LINEAR INTEGRATED CIRCUIT

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT. |
|---------------------------------|--------------|--|------|------|------|---------------|
| Load Regulation | ΔV_o | $5mA \leq I_o \leq 500mA$ | | 10 | 100 | mV |
| Quiescent Current | I_Q | $(V_o + 2V) \leq V_{IN} \leq 26V, I_o = 5mA$ $V_{IN} = V_o + 5V, I_o = 500mA$ | | 2 | 10 | mA |
| Output Noise Voltage | V_{NOISE} | 10Hz-100kHz, $I_o = 5mA$ | | 300 | | μV_{rms} |
| Long Term Stability | | 1000Hrs | | 40 | | mV |
| Dropout Voltage | V_D | $I_o = 500mA$ $I_o = 50mA$ | | 0.5 | 1.0 | V |
| Short Circuit Current | I_S | | 0.6 | 1.0 | | A |
| Peak Line Transient Voltage | T_{in} | $t_f \leq 100ms, R_L = 100\Omega$ | 60 | 75 | | V |
| Reverse DC Input Voltage | V_{Rin} | $V_o \geq -0.6V, R_L = 100\Omega$ | -15 | -30 | | V |
| Reverse Transient Input Voltage | V_{TRRI} | $t_f < 1ms, R_L = 100\Omega$ | -50 | -75 | | V |

LM2937-12.0V ELECTRICAL CHARACTERISTICS

($V_{IN} = V_{NOM} + 5V, I_o = 500mA, C_{out} = 10\mu F, T_j = T_a = 25^\circ C$, unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT. |
|---------------------------------|--------------|--|-------|-------|-------|---------------|
| Output Voltage | V_o | $5mA \leq I_o \leq 500mA$ | 11.64 | 12.00 | 12.36 | V |
| Line Regulation | ΔV_o | $V_o + 2V \leq V_{IN} \leq 26V, I_o = 5mA$ | | 36 | 120 | mV |
| Load Regulation | ΔV_o | $5mA \leq I_o \leq 500mA$ | | 12 | 120 | mV |
| Quiescent Current | I_Q | $(V_o + 2V) \leq V_{IN} \leq 26V, I_o = 5mA$ $V_{IN} = V_o + 5V, I_o = 500mA$ | | 2 | 10 | mA |
| Output Noise Voltage | V_{NOISE} | 10Hz-100kHz, $I_o = 5mA$ | | 360 | | μV_{rms} |
| Long Term Stability | | 1000Hrs | | 44 | | mV |
| Dropout Voltage | V_D | $I_o = 500mA$ $I_o = 50mA$ | | 0.5 | 1.0 | V |
| Short Circuit Current | I_S | | 0.6 | 1.0 | | A |
| Peak Line Transient Voltage | T_{in} | $t_f \leq 100ms, R_L = 100\Omega$ | 60 | 75 | | V |
| Reverse DC Input Voltage | V_{Rin} | $V_o \geq -0.6V, R_L = 100\Omega$ | -15 | -30 | | V |
| Reverse Transient Input Voltage | V_{TRRI} | $t_f < 1ms, R_L = 100\Omega$ | -50 | -75 | | V |

LM2937-15.0V ELECTRICAL CHARACTERISTICS

($V_{IN} = V_{NOM} + 5V, I_o = 500mA, C_{out} = 10\mu F, T_j = T_a = 25^\circ C$, unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT. |
|---------------------------------|--------------|--|-------|-------|-------|---------------|
| Output Voltage | V_o | $5mA \leq I_o \leq 500mA$ | 14.55 | 15.00 | 15.45 | V |
| Line Regulation | ΔV_o | $V_o + 2V \leq V_{IN} \leq 26V, I_o = 5mA$ | | 45 | 150 | mV |
| Load Regulation | ΔV_o | $5mA \leq I_o \leq 500mA$ | | 15 | 150 | mV |
| Quiescent Current | I_Q | $(V_o + 2V) \leq V_{IN} \leq 26V, I_o = 5mA$ $V_{IN} = V_o + 5V, I_o = 500mA$ | | 2 | 10 | mA |
| Output Noise Voltage | V_{NOISE} | 10Hz-100kHz, $I_o = 5mA$ | | 450 | | μV_{rms} |
| Long Term Stability | | 1000Hrs | | 56 | | mV |
| Dropout Voltage | V_D | $I_o = 500mA$ $I_o = 50mA$ | | 0.5 | 1.0 | V |
| Short Circuit Current | I_S | | 0.6 | 1.0 | | A |
| Peak Line Transient Voltage | T_{in} | $t_f \leq 100ms, R_L = 100\Omega$ | 60 | 75 | | V |
| Reverse DC Input Voltage | V_{Rin} | $V_o \geq -0.6V, R_L = 100\Omega$ | -15 | -30 | | V |
| Reverse Transient Input Voltage | V_{TRRI} | $t_f < 1ms, R_L = 100\Omega$ | -50 | -75 | | V |

UTC LM2937-XX LINEAR INTEGRATED CIRCUIT

ON/OFF CONTROL


| PARAMETER | SYMBOL | TEST CONDITIONS | MIN. | TYP. | MAX. | UNIT. |
|------------------------------|--------------|-----------------------------|------|------|------|---------|
| ON/OFF Threshold Voltage ON | V_{ON} | $I_o \leq 0.5A$ | | | 0.8 | V |
| ON/OFF Threshold Voltage OFF | V_{OFF} | $I_o \leq 0.5A$ | 2.0 | | | V |
| ON/OFF Threshold Current | $I_{ON/OFF}$ | $V_{ON/OFF}=2.0V, I_o=0.5A$ | | 50 | 100 | μA |

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Electrical Specifications do not apply when operating the device outside of its rated Operating Conditions.


Note 2: The maximum allowable power dissipation at any ambient temperature is $P_{MAX}=(125-T_A)/\Theta_{JA}$, where 125 is the maximum junction temperature for operation, T_A is the ambient temperature, and Θ_{JA} is the junction to ambient thermal resistance. If this dissipation is exceeded, the die temperature will rise above 125°C and the electrical specifications do not apply. If the die temperature rises above 150°C, the LM2937 will go into thermal shutdown. For the LM2937, the junction to ambient thermal resistance Θ_{JA} is 65°C/W, for the TO-220 package and 73°C/W for the TO-263 package. When used with a heat sink, Θ_{JA} is the sum of the LM2937 junction to case thermal resistance Θ_{JC} of 3°C/W and the heat sink case to ambient thermal resistance. If the TO-263 package is used, the thermal resistance can be reduced by increasing P.C. board copper area thermally connected to the package.

UTC LM2937-XX LINEAR INTEGRATED CIRCUIT

TYPICAL PERFORMANCE CHARACTERISTICS

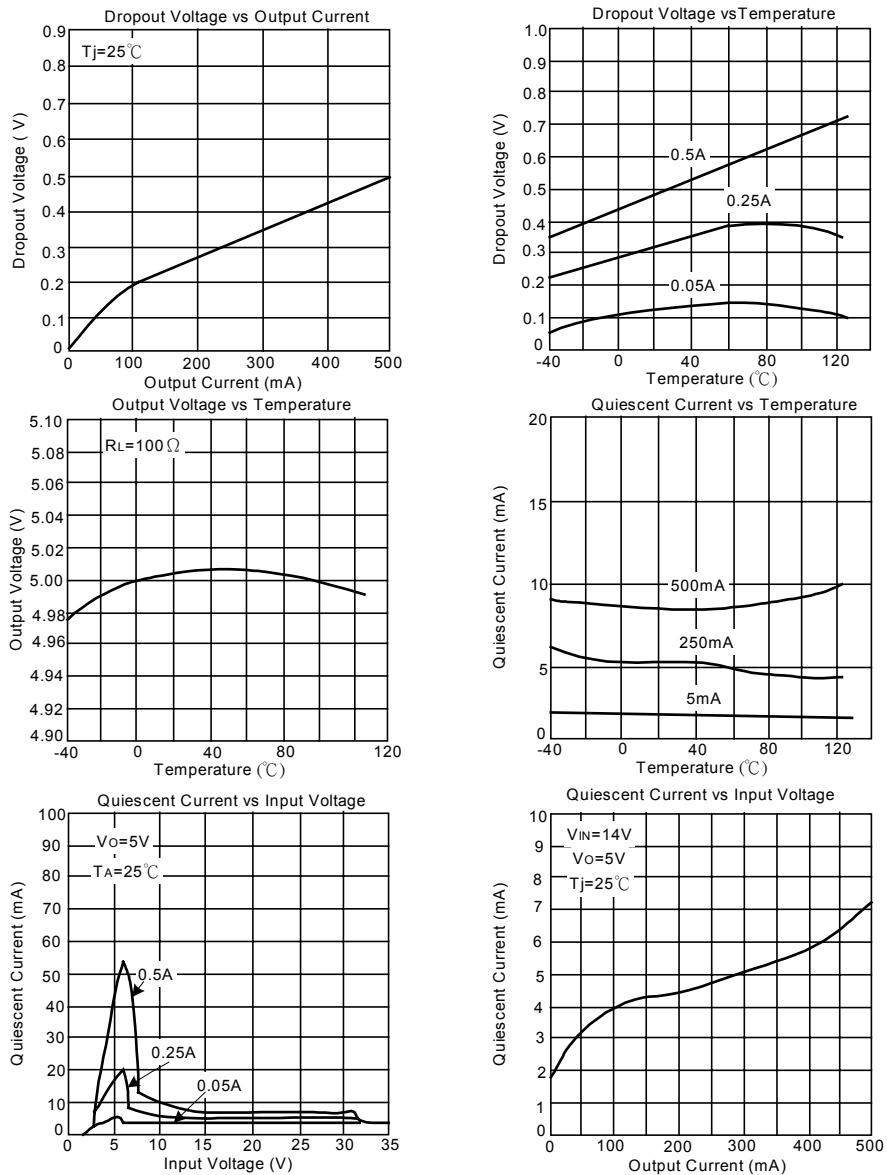

UTC LM2937-XX LINEAR INTEGRATED CIRCUIT

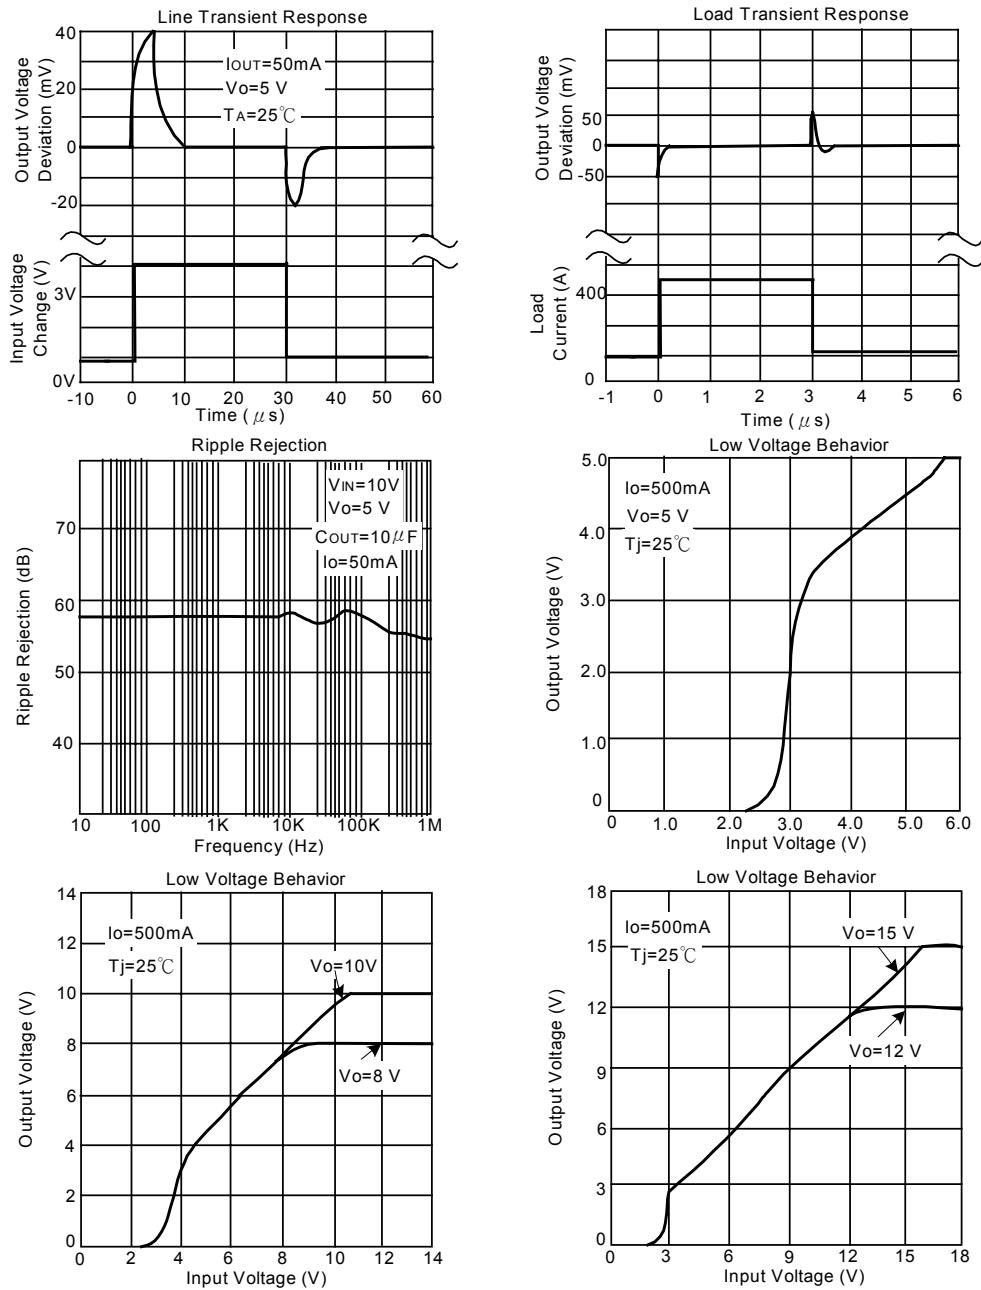

UTC UNISONIC TECHNOLOGIES CO., LTD.

UTC LM2937-XX LINEAR INTEGRATED CIRCUIT

