

OPA404

Quad High-Speed Precision *Difet*[®] OPERATIONAL AMPLIFIER

FEATURES

- WIDE BANDWIDTH: 6.4MHz
- HIGH SLEW RATE: 35pV/μs
- LOW OFFSET: ±750μV max
- LOW BIAS CURRENT: ±4pA max
- LOW SETTLING: 1.5μs to 0.01%
- STANDARD QUAD PINOUT

APPLICATIONS

- PRECISION INSTRUMENTATION
- OPTOELECTRONICS
- SONAR, ULTRASOUND
- PROFESSIONAL AUDIO EQUIPMENT
- MEDICAL EQUIPMENT
- DETECTOR ARRAYS

DESCRIPTION


The OPA404 is a high performance monolithic *Difet*[®] (dielectrically-isolated FET) quad operational amplifier. It offers an unusual combination of very-low bias current together with wide bandwidth and fast slew rate.

Noise, bias current, voltage offset, drift, and speed are superior to BIFET[®] amplifiers.

Laser-trimming of thin-film resistors gives very low offset and drift—the best available in a quad FET op amp.

The OPA404's input cascode design allows high precision input specifications and uncompromised high-speed performance.

Standard quad op amp pin configuration allows upgrading of existing designs to higher performance levels. The OPA404 is unity-gain stable.

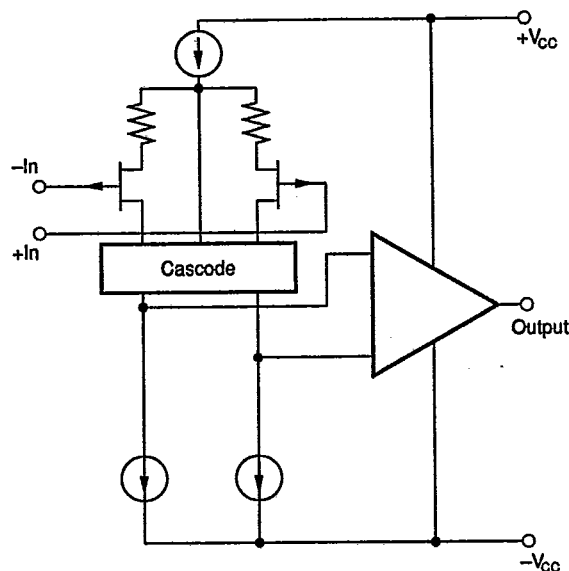

OPA404 Simplified Circuit
(Each Amplifier)

Difet[®], Burr-Brown Corp.
BIFET[®], National Semiconductor Corp.

International Airport Industrial Park • Mailing Address: PO Box 11400 • Tucson, AZ 85734 • Street Address: 6730 S. Tucson Blvd. • Tucson, AZ 85706
Tel: (602) 746-1111 • Twx: 910-952-1111 • Cable: BBRCORP • Telex: 066-6491 • FAX: (602) 889-1510 • Immediate Product Info: (800) 548-6132

SPECIFICATIONS

ELECTRICAL

At $V_{CC} = \pm 15VDC$ and $T_A = +25^\circ C$ unless otherwise noted.

PARAMETER	CONDITIONS	OPA404AG, KP, KU			OPA404BG			OPA404SG			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
INPUT NOISE⁽¹⁾ Voltage: $f_o = 10Hz$ $f_o = 100Hz$ $f_o = 1kHz$ $f_o = 10kHz$ $f_B = 10Hz$ to $10kHz$ $f_B = 0.1Hz$ to $10Hz$ Current: $f_B = 0.1Hz$ to $10Hz$ $f_o = 0.1Hz$ thru $20kHz$			32			*			*		nV/\sqrt{Hz}
				19			*		*		nV/\sqrt{Hz}
				15			*		*		nV/\sqrt{Hz}
				12			*		*		nV/\sqrt{Hz}
				1.4			*		*		$\mu Vrms$
				0.95			*		*		$\mu Vp-p$
				12			*		*		fA, p-p
			0.6			*		*		fA/ \sqrt{Hz}	
OFFSET VOLTAGE Input Offset Voltage KP, KU Average Drift KP, KU Supply Rejection KP, KU Channel Separation	$V_{CM} = 0VDC$		± 260	$\pm 1mV$		*	± 750		*	*	μV
	$T_A = T_{MIN}$ to T_{MAX}		± 750	$\pm 2.5mV$		*			*	*	μV
	$\pm V_{CC} = 12V$ to $18V$	80	100		86	*		*	*	*	$\mu V/^\circ C$
	$100Hz, R_L = 2k\Omega$	76	100			*		*	*	*	$\mu V/^\circ C$
BIAS CURRENT Input Bias Current KP, KU	$V_{CM} = 0VDC$		± 1	± 8		*	± 4		*	*	pA
			± 1	± 12		*			*	*	pA
OFFSET CURRENT Input Offset Current KP, KU	$V_{CM} = 0VDC$		0.5	8		*	4		*	*	pA
			0.5	12		*			*	*	pA
IMPEDANCE Differential Common-Mode			$10^{13} \parallel 1$			*			*		$\Omega \parallel pF$
			$10^{14} \parallel 3$			*			*		$\Omega \parallel pF$
VOTAGE RANGE Common-Mode Input Range Common-Mode Rejection KP, KU	$V_N = \pm 10VDC$	± 10.5	+13, -11		*	*		*	*		V
		88	100		92	*		*	*		dB
		84	100			*		*	*		dB
OPEN-LOOP GAIN, DC Open-Loop Voltage Gain	$R_L \geq 2k\Omega$	88	100		92	8		*	*		dB
FREQUENCY RESPONSE Gain Bandwidth Full Power Response Slew Rate Settling Time: 0.1% 0.01%	Gain = 100	4	6.4		5	*		*	*		MHz
	$20Vp-p, R_L = 2k\Omega$		570			*		*	*		kHz
	$V_o = \pm 10V, R_L = 2k\Omega$	24	35		28	*		*	*		V/ μs
	Gain = -1, $R_L = 2k\Omega$		0.6			*		*	*		μs
	$C_L = 100 pF, 10V Step$		1.5				*		*		μs
RATED OUTPUT Voltage Output Current Output Output Resistance Load Capacitance Stability Short Circuit Current	$R_L = 2k\Omega$	± 11.5	+13.2, -13.8		*	*		*	*		V
	$V_o = \pm 10VDC$	± 5	± 10		*	*		*	*		mA
	$1MHz, Open Loop$		80			*		*	*		Ω
	Gain = +1		1000			*		*	*		pF
		± 10	± 18	± 20	*	*	*	*	*	*	mA
POWER SUPPLY Rated Voltage Voltage Range, Derated Performance Current, Quiescent			± 15			*		*	*		VDC
		± 5		± 18	*	*	*	*	*	*	VDC
	$I_o = 0mADC$		9	10		*	*	*	*	*	mA
TEMPERATURE RANGE Specification KP, KU Operating KP, KU Storage KP, KU θ Junction-Ambient KP, KU	Ambient Temperature	-25		+85	*		*	-55		+125	$^\circ C$
		0		+70	*		*	*		*	$^\circ C$
	Ambient Temperature	-55		+125	*		*	*		*	$^\circ C$
		-25		+85	*		*	*		*	$^\circ C$
	Ambient Temperature	-65		+150	*		*	*		*	$^\circ C$
		-40		+125	*		*	*		*	$^\circ C$
			100			*		*		*	$^\circ C/W$
		120/100								$^\circ C/W$	

*Specifications same as OPA404AG.

NOTE: (1) Noise testing available—inquire.

The information provided herein is believed to be reliable; however, BURR-BROWN assumes no responsibility for inaccuracies or omissions. BURR-BROWN assumes no responsibility for the use of this information, and all use of such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. BURR-BROWN does not authorize or warrant any BURR-BROWN product for use in life support devices and/or systems.

ELECTRICAL (FULL TEMPERATURE RANGE SPECIFICATIONS)

At $V_{CC} = \pm 15VDC$ and $T_A = T_{MIN}$ to T_{MAX} unless otherwise noted.

PARAMETER	CONDITIONS	OPA404AG, KP, KU			OPA404BG			OPA404SG			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
TEMPERATURE RANGE Specification Range KP, KU	Ambient Temperature	-25 0		+85 +70	*		*	-55		+125	°C °C
INPUT OFFSET VOLTAGE Input Offset Voltage KP, KU Average Drift KP, KU Supply Rejection	$V_{CM} = 0VDC$		±450 ±1 ±3 ±5 96	2mV ±3.5		*	±1.5mV		±550 *	±2.5mV	μV mV μV/°C μV/°C dB
BIAS CURRENT Input Bias Current	$V_{CM} = 0VDC$		±32	±200		*	±100		±500	±5nA	pA
OFFSET CURRENT Input Offset Current	$V_{CM} = 0VDC$		17	100		*	50		260	2.5nA	pA
VOLTAGE RANGE Common-Mode Input Range Common-Mode Rejection KP, KU	$V_N = \pm 10VDC$	±10 82 80	±12.7, -10.6 99 99		*	*		±10 80	+12.6, -10.5 88		V dB dB
OPEN-LOOP GAIN, DC Open-Loop Voltage Gain	$R_L \geq 2k\Omega$	82	94		86	*		80	88		dB
RATED OUTPUT Voltage Output Current Output Short Circuit Current	$R_L = 2k\Omega$ $V_O = \pm 10VDC$ $V_O = 0VDC$	±11.5 ±5 ±5	±12.9, -13.8 ±9 ±12	±30	*	*	*	±11 *	+12.7, -13.8 ±8 ±10	*	V mA mA
POWER SUPPLY Current, Quiescent	$I_O = 0mADC$		9.3	10.5		*	*		9.4	11	mA

NOTE: Specification same as OPA404AG.

ORDERING INFORMATION



MODEL	PACKAGE	TEMPERATURE RANGE	USA OEM PRICES		
			1-24	25-99	100+
OPA404KP	14-pin Plastic DIP	0°C to +70°C	\$13.20	\$10.10	\$7.45
OPA404KU	16-pin Plastic SOIC	0°C to +70°C	15.15	11.65	8.50
OPA404AG	14-pin Ceramic DIP	-25°C to +85°C	19.60	15.50	10.55
OPA404BG	14-pin Ceramic DIP	-25°C to +85°C	25.90	19.50	15.15
OPA404SG	14-pin Ceramic DIP	-55°C to +125°C	38.25	28.75	23.55

ABSOLUTE MAXIMUM RATINGS

Supply	±18VDC
Internal Power Dissipation ⁽¹⁾	1000mW
Differential Input Voltage ⁽²⁾	±36VDC
Input Voltage Range ⁽²⁾	±18VDC
Storage Temperature Range	P, U = -40/+125°C, G = -65°C / +150°C
Operating Temperature Range	P, U = -25/+85°C, G = -55°C / +125°C
Lead Temperature (soldering, 10s)	+300°C
Output Short-Circuit Duration ⁽³⁾	Continuous
Junction Temperature	+175°C

NOTES:(1) Packages must be derated based on $\theta_{JC} = 30^\circ C/W$ or $\theta_{JA} = 1C/W$.
 (2) For supply voltages less than ±18VDC the absolute maximum input voltage is equal to: $18V > V_N > -V_{CC} - 8V$. See Figure 2. (3) Short circuit may be to power supply common only. Rating applies to +25°C ambient. Observe dissipation limit and T_J .

PIN CONFIGURATION

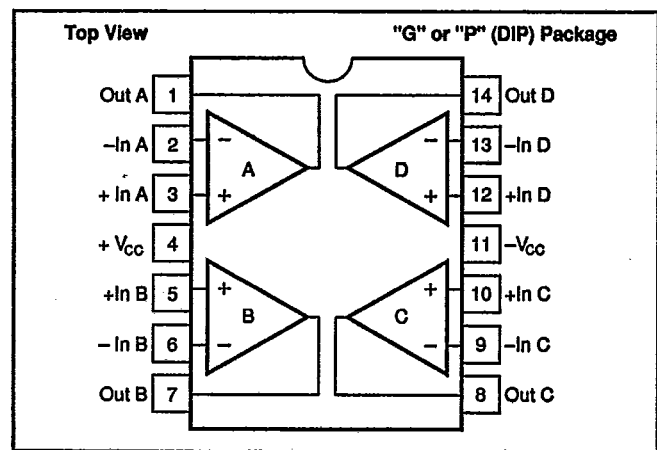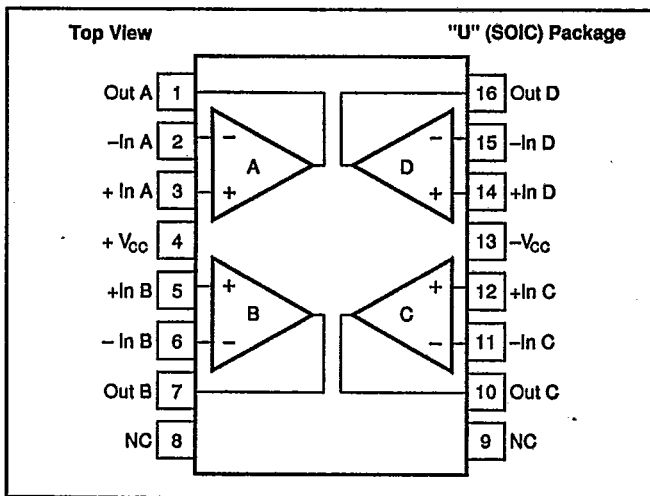

MECHANICAL

U Package — 16-Pin Plastic SOIC

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.400	.416	10.16	10.57
A ₁	.388	.412	9.86	10.46
B	.286	.302	7.26	7.67
B ₁	.268	.286	6.81	7.26
C	.093	.109	2.36	2.77
D	.015	.020	0.38	0.51
G	.050 BASIC		1.27 BASIC	
H	.022	.038	0.56	0.97
J	.008	.012	0.20	0.30
L	.391	.421	9.93	10.69
M	5° TYP		5° TYP	
N	.000	.012	0.00	0.30

NOTE: Leads in true position within 0.010" (0.25mm) R at MMC at seating plane.


P Package — 14-Pin Plastic DIP

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.120	.160	3.048	4.064
A ₁	.015	.065	.381	1.651
B	.014	.020	.355	.508
B ₁	.050	.065	1.270	1.651
C	.008	.012	.203	.304
D	.745	.770	18.923	19.558
E	.300	.325	7.620	8.255
E ₁	.240	.260	6.096	6.604
e ₁	.100 BASIC		2.540 BASIC	
e _A	.300 BASIC		7.620 BASIC	
L	.125	.150	3.175	3.810
L ₂ ⁽¹⁾	0	.030	0	.762
alpha	0°	15°	0°	15
P	—	.050	—	1.270
Q ₁	.050	.085	1.270	2.159
S ⁽²⁾	.065	.090	1.651	2.286

NOTE: Leads in true position within 0.01" (0.25mm) R at MMC at seating plane.
 (1) e₁ and e_A apply in zone L₂ when unit is installed.
 (2) Not per JEDEC

MECHANICAL

G Package — 14-Pin Ceramic DIP




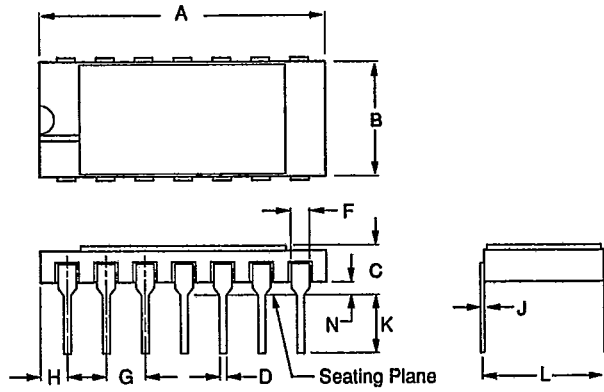


DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.692	.708	17.58	17.98
B	.300	.320	7.62	8.13
C	.102	.138	2.59	3.51
D	.016	.020	0.41	0.51
F	.042	.052	1.07	1.32
G	.100 BASIC		2.54 BASIC	
H	.052	.058	1.32	1.47
J	.008	.012	0.20	0.30
K	.125	.180	3.18	4.57
L	.300 BASIC		7.62 BASIC	
N	.025	.046	0.64	1.14

NOTE: Leads in true position within 0.01" (0.25mm) R at MMC at seating plane.







TYPICAL PERFORMANCE CURVES

T_A = +25°C, V_{CC} = ±15VDC unless otherwise noted.

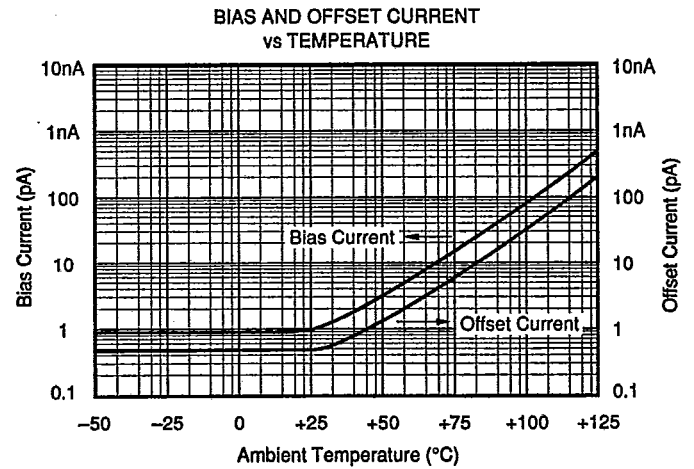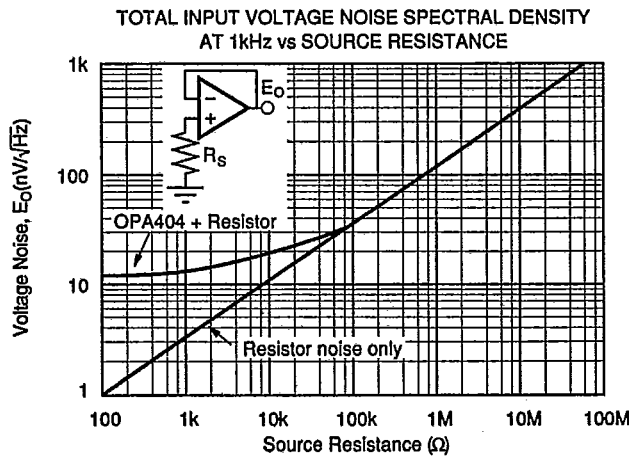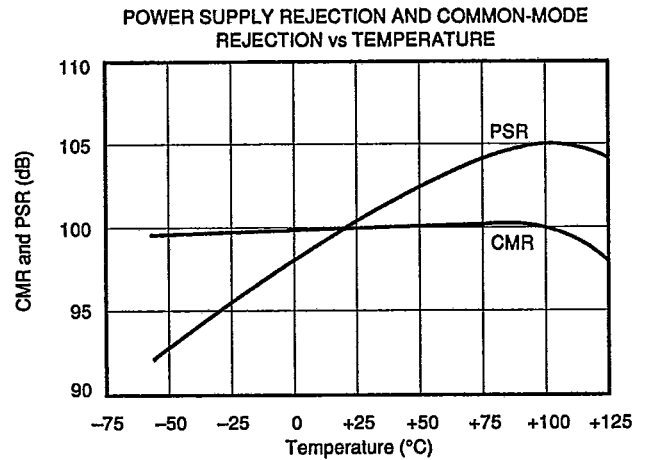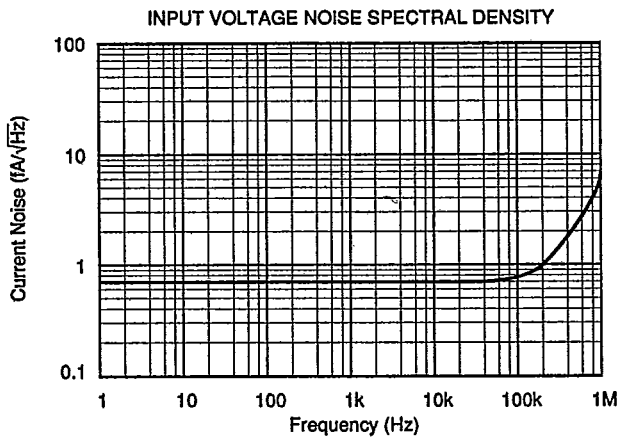







TYPICAL PERFORMANCE CURVES (CONT)

$T_A = +25^\circ\text{C}$, $V_{CC} = \pm 15\text{VDC}$ unless otherwise noted.

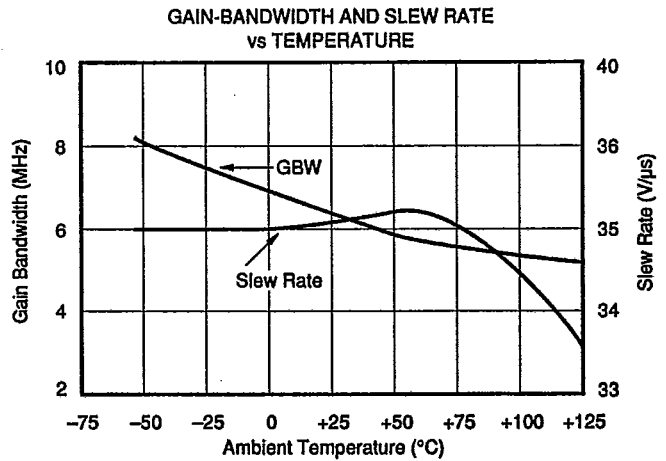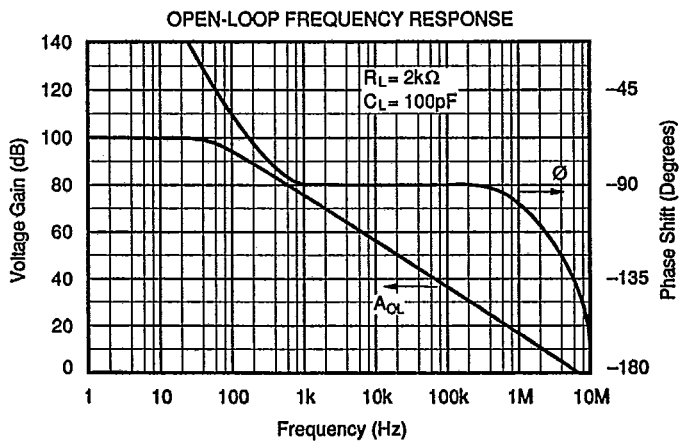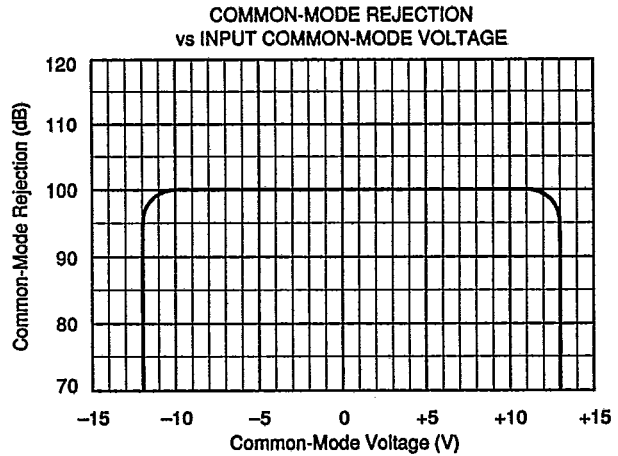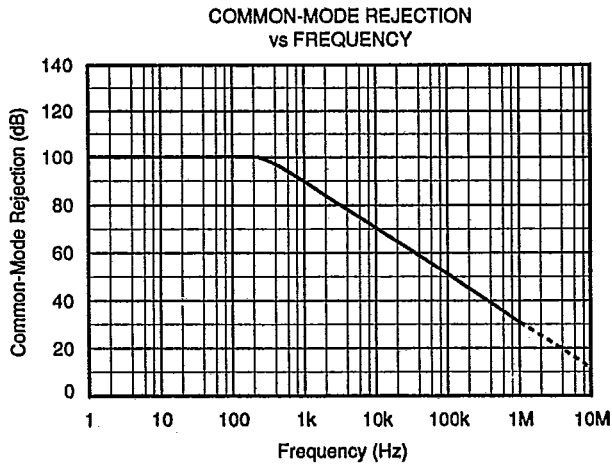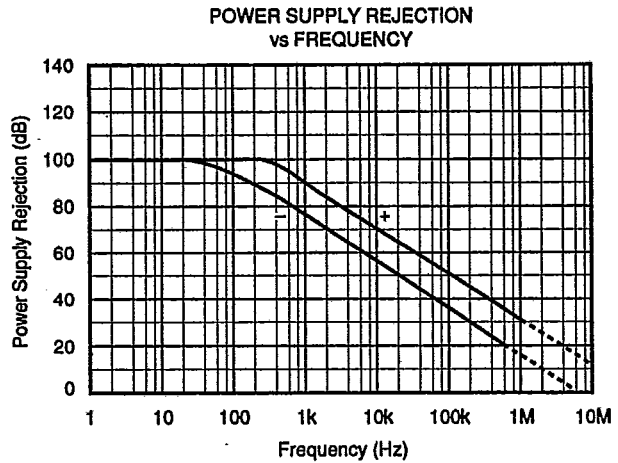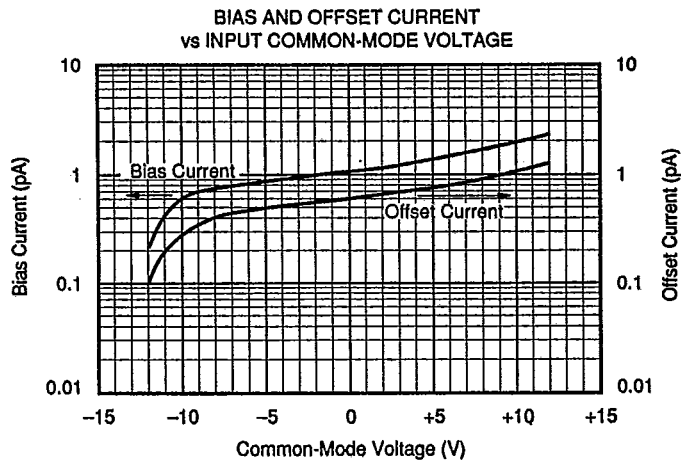






TYPICAL PERFORMANCE CURVES (CONT)

$T_A = +25^\circ\text{C}$, $V_{CC} = \pm 15\text{VDC}$ unless otherwise noted.

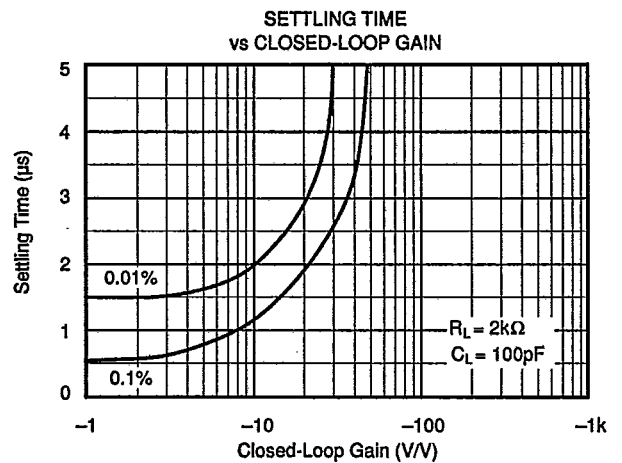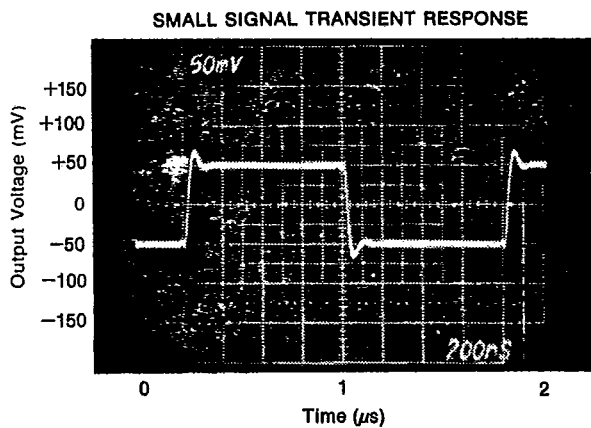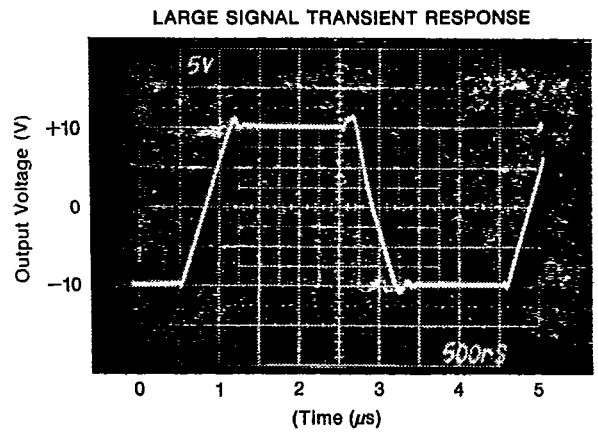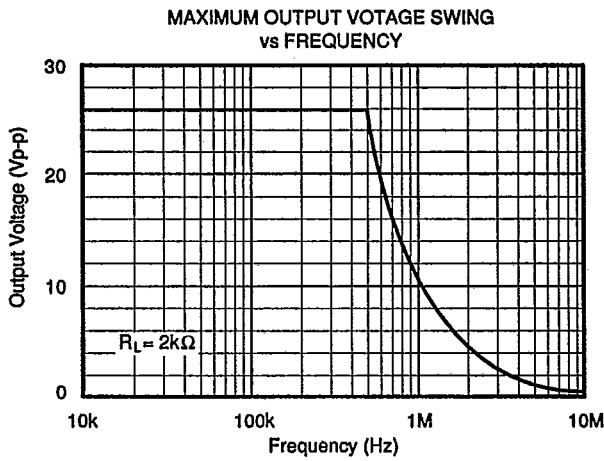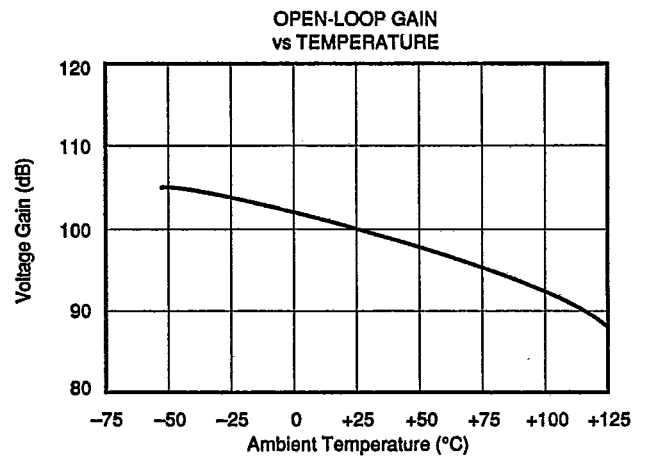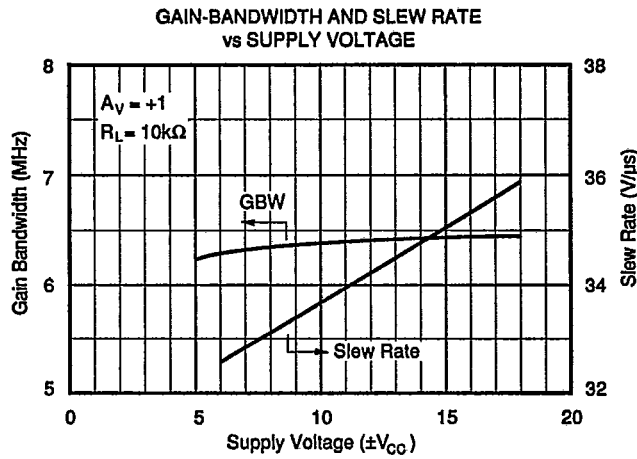

TYPICAL PERFORMANCE CURVES (CONT)

$T_A = +25^\circ\text{C}$, $V_{CC} = \pm 15\text{VDC}$ unless otherwise noted.

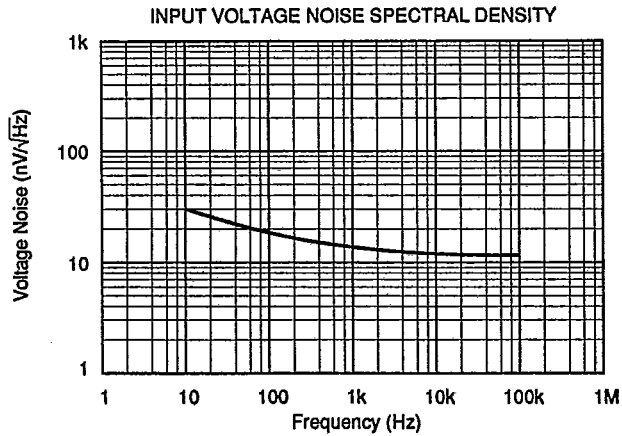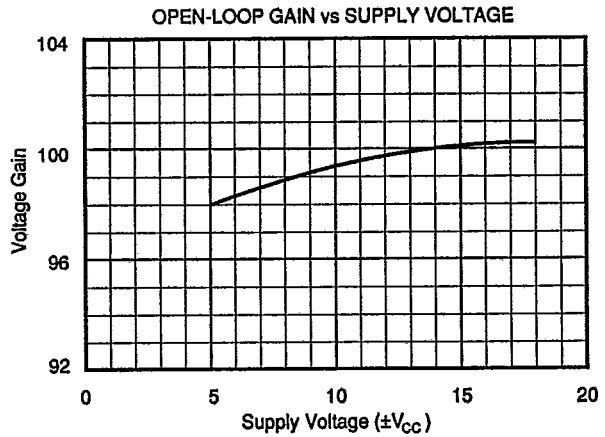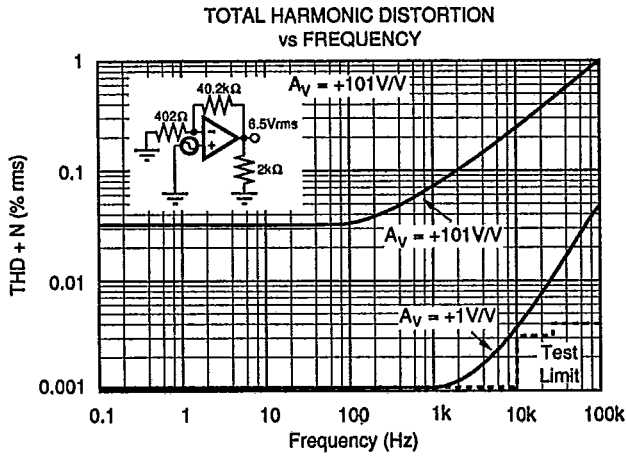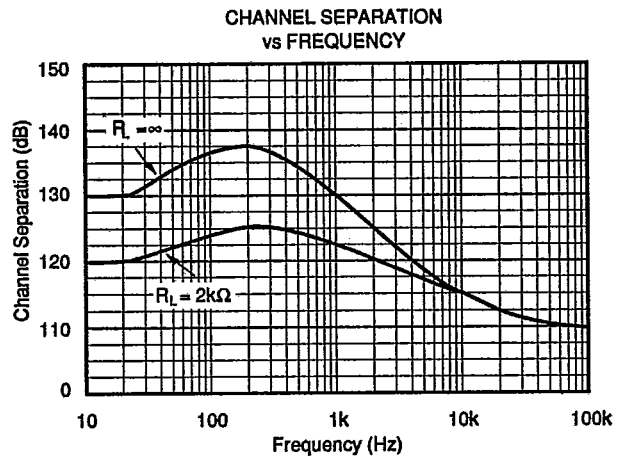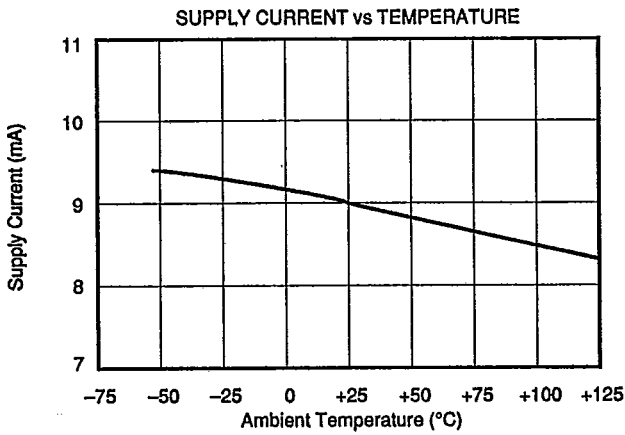

APPLICATIONS INFORMATION

OFFSET VOLTAGE ADJUSTMENT

The OPA404 offset voltage is laser-trimmed and will require no further trim for most applications. If desired, offset voltage can be trimmed by summing (see Figure 1). With this trim method there will be no degradation of input offset drift.

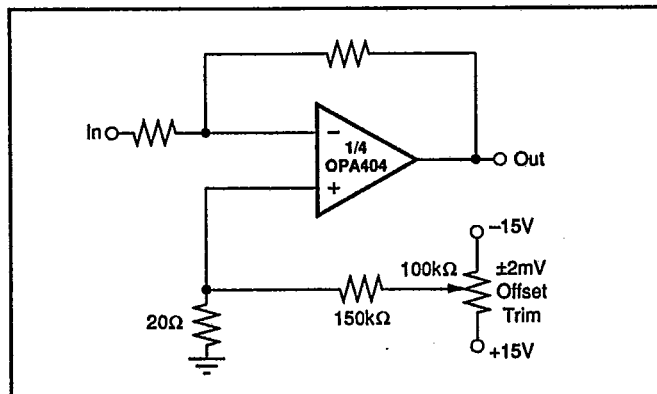


FIGURE 1. Offset Voltage Trim.

INPUT PROTECTION

Conventional monolithic FET operational amplifiers require external current-limiting resistors to protect their inputs against destructive currents that can flow when input FET gate-to-substrate isolation diodes are forward-biased. Most BIFET amplifiers can be destroyed by the loss of $-V_{CC}$.

Unlike BIFET amplifiers, the *Difet* OPA404 requires input current limiting resistors only if its input voltage can exceed $-8V$. A $10k\Omega$ series resistor will limit the input current to a safe value with up to $\pm 15V$ input levels even if both supply voltages are lost. (See Figure 2 and Absolute Maximum Ratings).

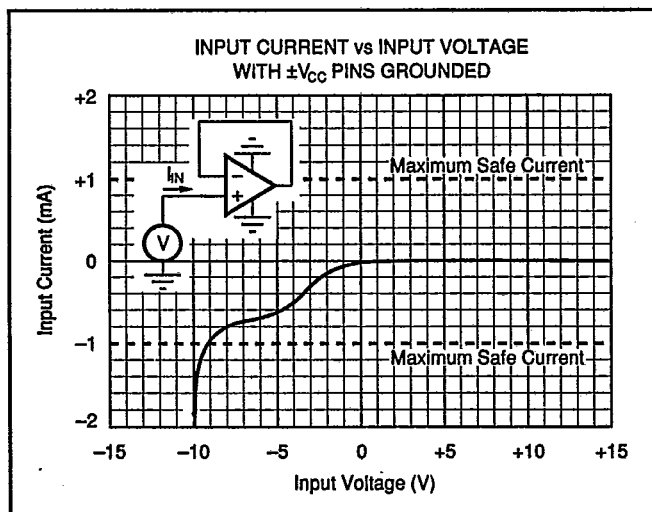


FIGURE 2. Input Current vs Input Voltage with $\pm V_{CC}$ Pins Grounded.

Static damage can cause subtle changes in amplifier input characteristics without necessarily destroying the device. In precision operational amplifiers (both bipolar and FET types), this may cause a noticeable degradation of offset voltage and drift.

Static protection is recommended when handling any precision IC operational amplifier.

GUARDING AND SHIELDING

As in any situation where high impedances are involved, careful shielding is required to reduce "hum" pickup in input leads. If large feedback resistors are used, they should also be shielded along with the external input circuitry.

Leakage currents across printed circuit boards can easily exceed the bias current of the OPA404. To avoid leakage, utmost care must be used in planning the board layout. A "guard" pattern should completely surround the high impedance input leads and should be connected to a low-impedance point which is at the signal input potential. (See Figure 3).

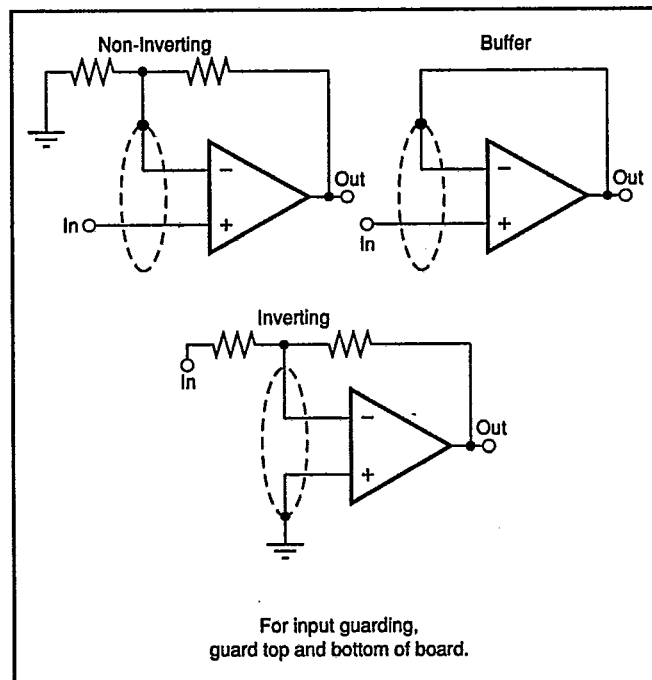


FIGURE 3. Connection of Input Guard.

HANDLING AND TESTING

Measuring the unusually low bias current of the OPA404 is difficult without specialized test equipment; most commercial benchtop testers cannot accurately measure the OPA404 bias current. Low-leakage test sockets and special test fixtures are recommended if incoming inspection of bias current is to be performed.

To prevent surface leakage between pins, the DIP package should not be handled by bare fingers. Oils and salts from fingerprints or careless handling can create leakage currents that exceed the specified OPA404 bias currents.

If necessary, DIP packages and PC board assemblies can be cleaned with Freon TF[®], baked for 30 minutes at 85°C, rinsed with de-ionized water, and baked again for 30 minutes at 85°C. Surface contamination can be prevented by the application of a high-quality conformal coating to the cleaned PC board assembly.

BIAS CURRENT CHANGE VERSUS COMMON-MODE VOLTAGE

The input bias currents of most popular BIFET operational amplifiers are affected by common-mode voltage (Figure 4). Higher input FET gate-to-drain voltage causes leakage and ionization (bias) currents to increase. Due to its cascode

input stage, the extremely-low bias current of the OPA404 is not compromised by common-mode voltage.

APPLICATIONS CIRCUITS

Figures 5 through 11 are circuit diagrams of various applications for the OPA404.

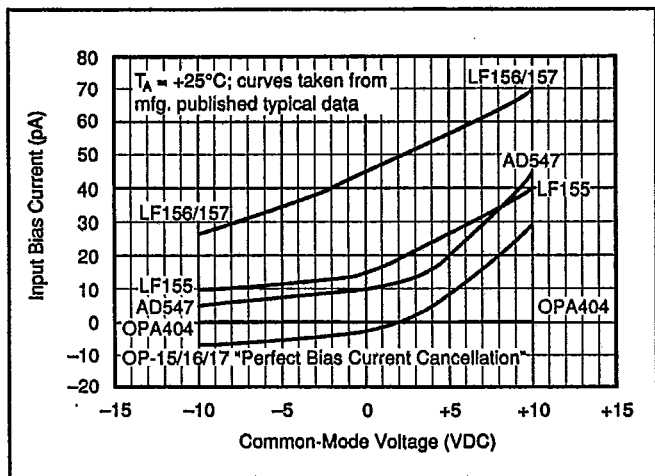


FIGURE 4. Input Bias Current vs Common-Mode Voltage.

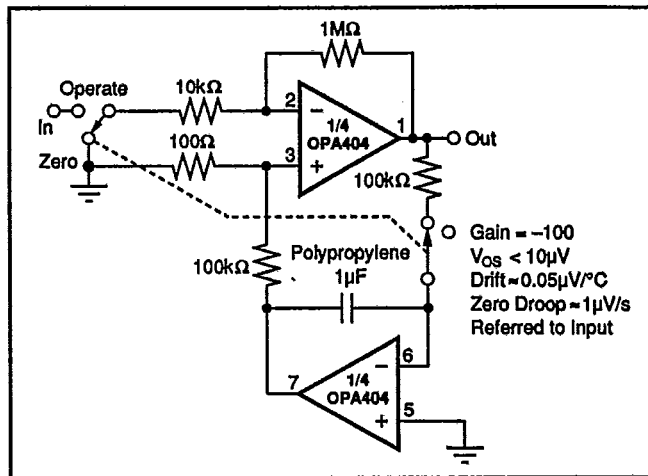


FIGURE 5. Auto-Zero Amplifier.

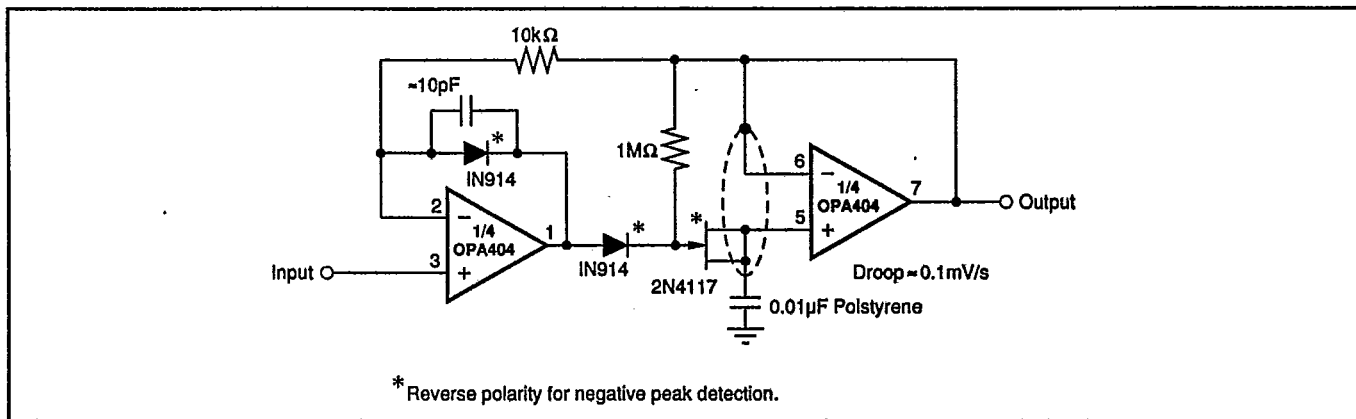


FIGURE 6. Low-Droop Positive Peak Detector.

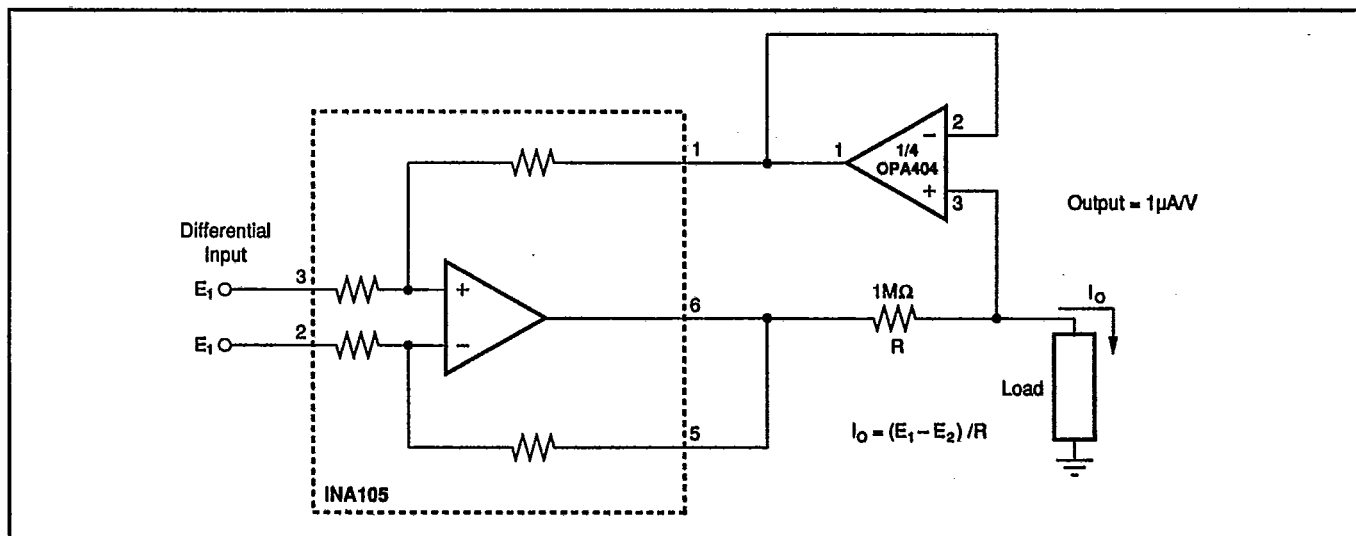


FIGURE 7. Voltage-Controlled Microamp Current Source.

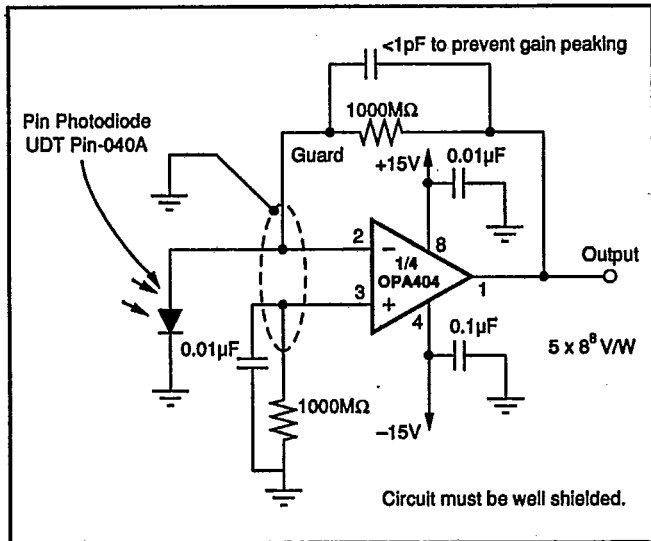


FIGURE 8. Sensitive Photodiode Amplifier.

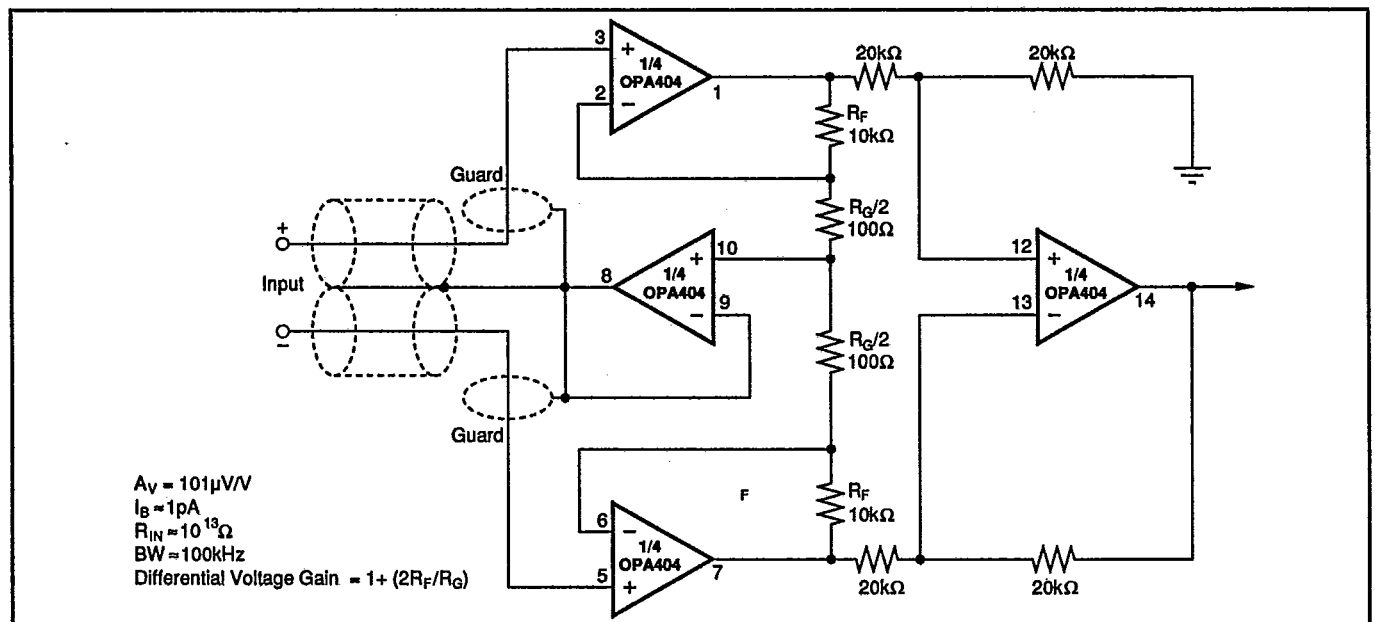


FIGURE 9. FET Instrumentation Amplifier with Shield Driver.

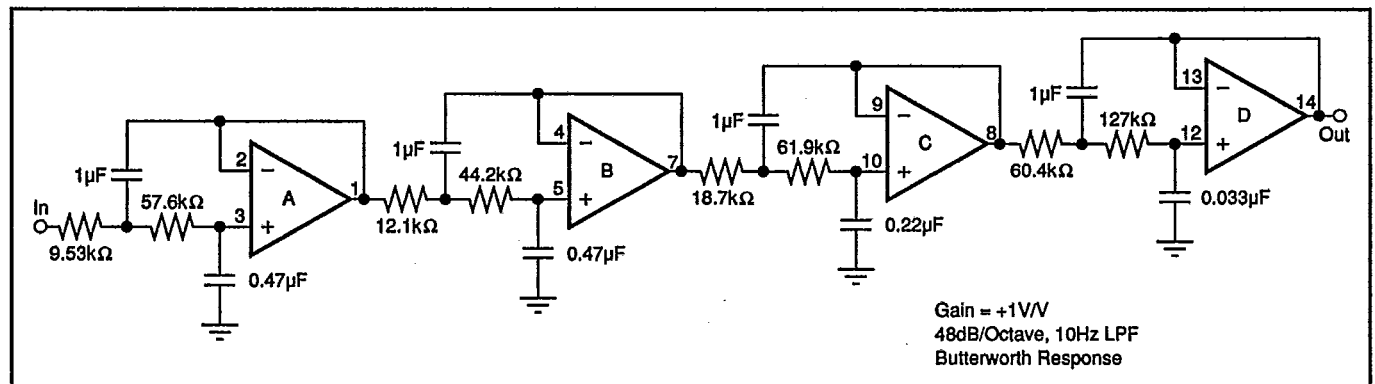


FIGURE 10. 8-Pole 10Hz Low-Pass Filter.

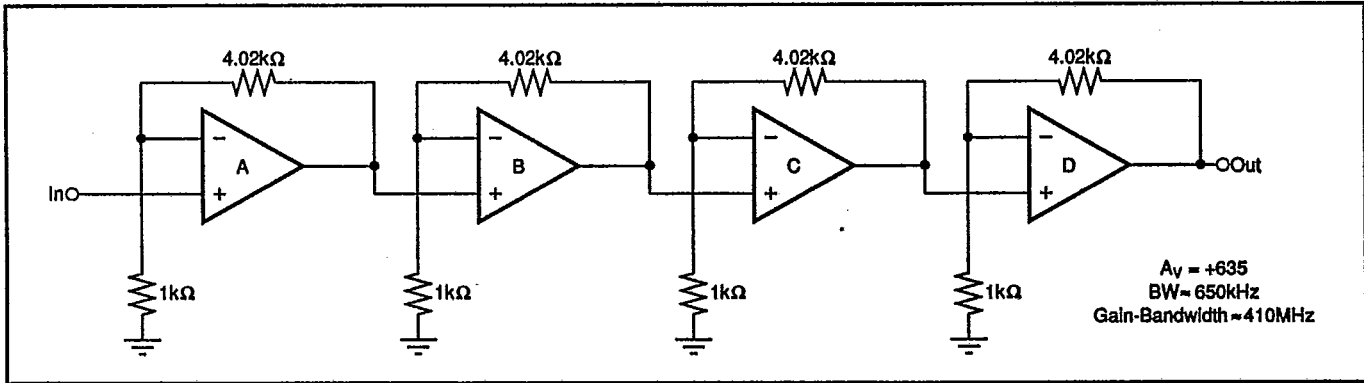


FIGURE 11. Wide-Band Amplifier.