

## FAST SOFT-RECOVERY RECTIFIER DIODES

Fast soft-recovery diodes in DO-4 metal envelopes especially suitable for operation as main and commutating diodes in 3-phase a.c. motor speed control inverters and in high frequency power supplies in general.

The series consists of the following types:

Normal polarity (cathode to stud): BYV24-800 and BYV24-1000.


Reverse polarity (anode to stud): BYV24-800R and BYV24-1000R.

## QUICK REFERENCE DATA

		BYV24-800(R)		1000(R)	
Repetitive peak reverse voltage	V <sub>RRM</sub>	max.	800	1000	V
Average forward current	I <sub>F(AV)</sub>	max.	12		A
Non-repetitive peak forward current	I <sub>FSM</sub>	max.	150		A
Reverse recovery time	t <sub>rr</sub>	<	450		ns

## MECHANICAL DATA

Dimensions in mm

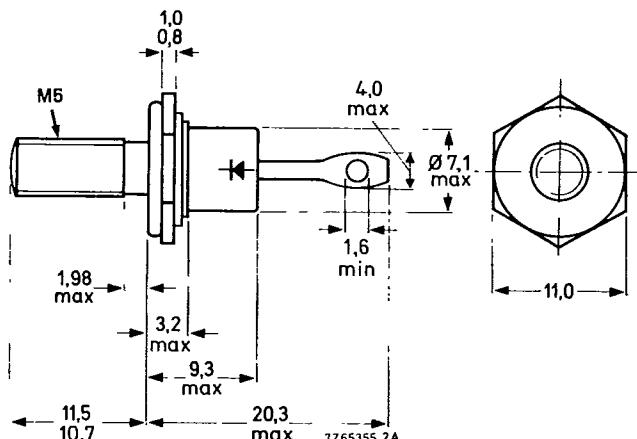Fig. 1 DO-4: with metric M5 stud ( $\phi 5$  mm)

Net mass: 6 g

Diameter of clearance hole: max 5.2 mm

Accessories supplied on request:

see ACCESSORIES section

Supplied with device: 1 nut, 1 lock washer.

Torque on nut: min. 0.9 Nm (9 kg cm)

max. 1.7 Nm (17 kg cm)

Nut dimensions across the flats: 8.0 mm.

The mark shown applies to the normal polarity types.

## BYV24 SERIES

PHILIPS INTERNATIONAL

56E D ■ 7110826 0041315 583 ■ PHIN

## RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

T-03-17

## Voltages\*

			BYV24-800(R)	1000(R)	
Non-repetitive peak reverse voltage	$V_{RSM}$	max.	1000	1200	V
Repetitive peak reverse voltage	$V_{RRM}$	max.	800	1000	V
Crest working reverse voltage	$V_{RWM}$	max.	650	850	V
Continuous reverse voltage	$V_R$	max.	650	850	V

## Currents

## Average forward current

sinusoidal; up to $T_{mb} = 103^\circ C$	$I_{F(AV)}$	max.	12	A
sinusoidal; at $T_{mb} = 125^\circ C$	$I_{F(AV)}$	max.	7	A
square-wave; $\delta = 0.5$ ; up to $T_{mb} = 103^\circ C$	$I_{F(AV)}$	max.	14	A
square-wave; $\delta = 0.5$ ; at $T_{mb} = 125^\circ C$	$I_{F(AV)}$	max.	8	A

## R.M.S. forward current

R.M.S. forward current	$I_{F(RMS)}$	max.	20	A
------------------------	--------------	------	----	---

## Repetitive peak forward current

Repetitive peak forward current	$I_{FRM}$	max.	120	A
---------------------------------	-----------	------	-----	---

## Non-repetitive peak forward current

$t = 10 \text{ ms}$ ; half sine-wave;	$I_{FSM}$	max.	150	A
$T_j = 150^\circ C$ prior to surge;	$I_{FSM}$	max.	120	A

without re-applied voltage with re-applied  $V_{RWMmax}$  $I^2t$  for fusing ( $t = 10 \text{ ms}$ ) $I^2t$  max. 72  $\text{A}^2\text{s}$ 

## Temperatures

Storage temperature

 $T_{stg}$  -55 to +150  $^\circ C$ 

Junction temperature

 $T_j$  max. 150  $^\circ C$ 

## THERMAL RESISTANCE

From junction to mounting base

 $R_{th j-mb}$  = 2.0  $^\circ C/W$ 

From mounting base to heatsink

 $R_{th mb-h}$  = 0.3  $^\circ C/W$ 

with heatsink compound

 $R_{th mb-h}$  = 0.5  $^\circ C/W$ 

without heatsink compound

Transient thermal impedance;  $t = 1 \text{ ms}$  $Z_{th j-mb}$  = 0.85  $^\circ C/W$ 

## MOUNTING INSTRUCTIONS

The top connector should neither be bent nor twisted; it should be soldered into the circuit so that there is no strain on it.

During soldering the heat conduction to the junction should be kept to a minimum.

\*To ensure thermal stability:  $R_{th j-a} \leq 8 \text{ }^\circ C/W$  (continuous reverse voltage).

PHILIPS INTERNATIONAL  
CHARACTERISTICS

56E D ■ 7110826 0041316 41T ■ PHIN

T-03-17

## Forward voltage

 $I_F = 20 \text{ A}; T_j = 25^\circ\text{C}$  $V_F < 1.7 \text{ V}^*$ 

## Reverse current

 $V_R = V_{RWMmax}; T_j = 125^\circ\text{C}$  $I_R < 1.5 \text{ mA}$ 


## Reverse recovery when switched from

 $I_F = 10 \text{ A} \text{ to } V_R \geq 30 \text{ V} \text{ with } -dI_F/dt = 10 \text{ A}/\mu\text{s}; T_j = 25^\circ\text{C}$  $t_{rr} < 450 \text{ ns}$ 

## Recovery time

 $I_F = 2 \text{ A} \text{ to } V_R \geq 30 \text{ V} \text{ with } -dI_F/dt = 20 \text{ A}/\mu\text{s}; T_j = 25^\circ\text{C}$  $Q_s < 800 \text{ nC}$ 

## Recovered charge

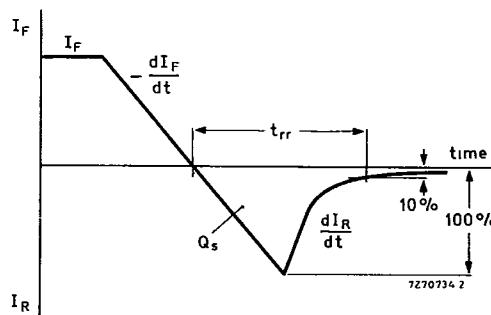Maximum slope of the reverse recovery current  
when switched from  $I_F = 2 \text{ A}$  to  $V_R \geq 30 \text{ V}$ ;with  $-dI_F/dt = 2 \text{ A}/\mu\text{s}; T_j = 25^\circ\text{C}$  $|dI_R/dt| < 7 \text{ A}/\mu\text{s}$ Fig.2 Definition of  $t_{rr}$  and  $Q_s$ .

\*Measured under pulse conditions to avoid excessive dissipation.

## SINUSOIDAL OPERATION

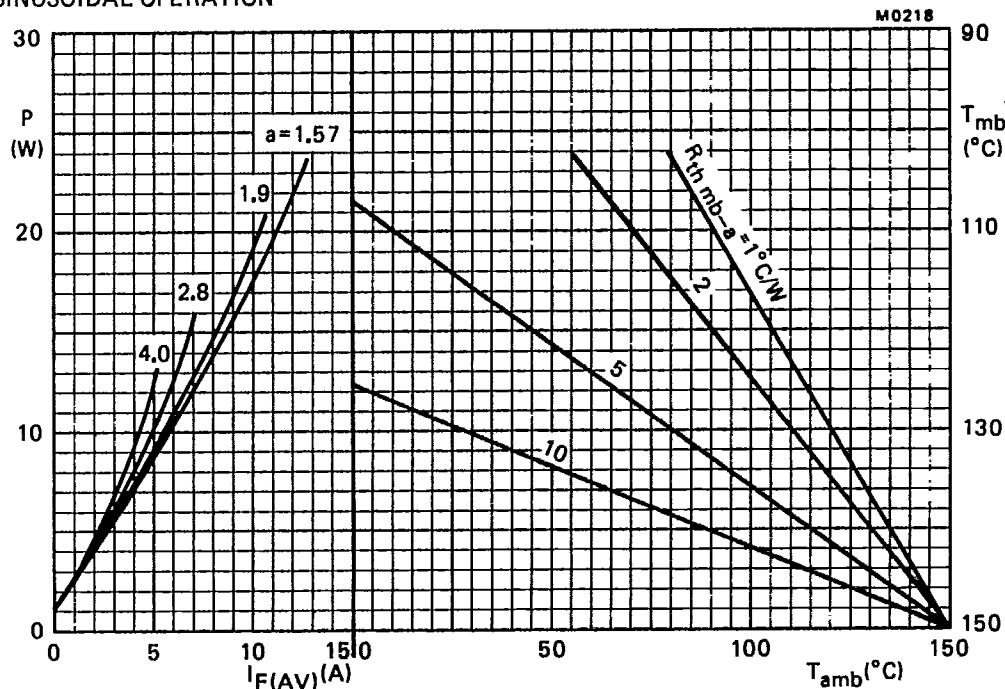


Fig.3 The right-hand part shows the interrelationship between the power (derived from the left-hand part) and the maximum permissible temperatures.

$P$  = power including reverse current losses but excluding switching losses.

$a$  = form factor =  $I_F(\text{RMS})/I_F(\text{AV})$ .

\* $T_{mb}$  scale is for comparison purposes and is correct only for  $R_{th\ mb-a} < 8 \text{ }^{\circ}\text{C/W}$ .

PHILIPS INTERNATIONAL

56E D ■ 7110826 0041318 292 ■ PHIN

## SQUARE-WAVE OPERATION


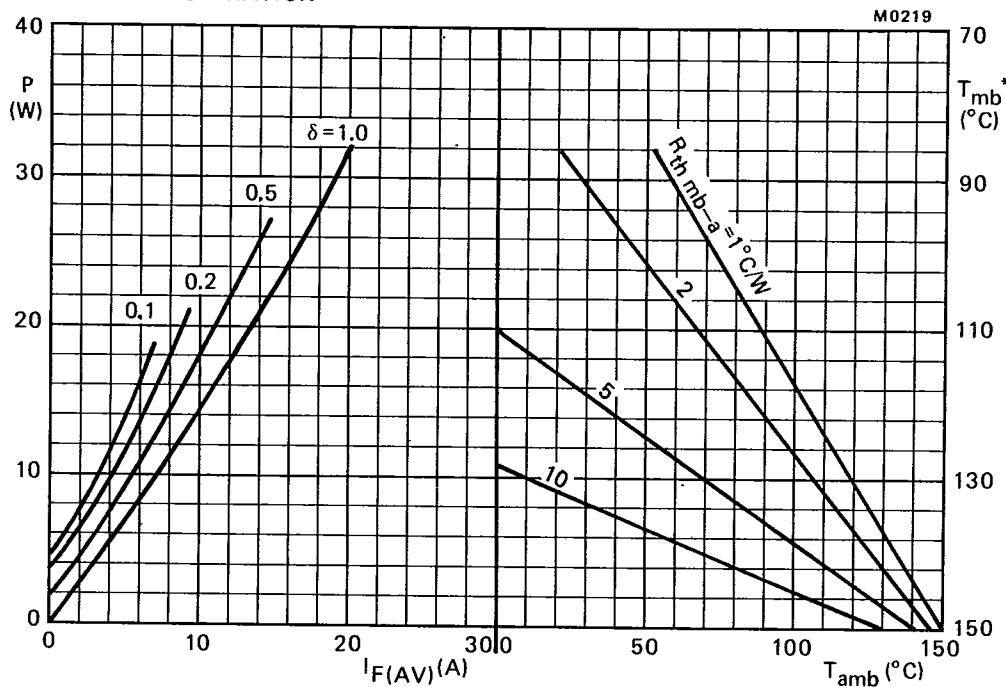


Fig.4 The right-hand part shows the interrelationship between the power (derived from the left-hand part) and the maximum permissible temperatures.

P = power including reverse current losses but excluding switching losses.



$$I_{F(AV)} = I_{F(RMS)} \times \sqrt{\delta}$$

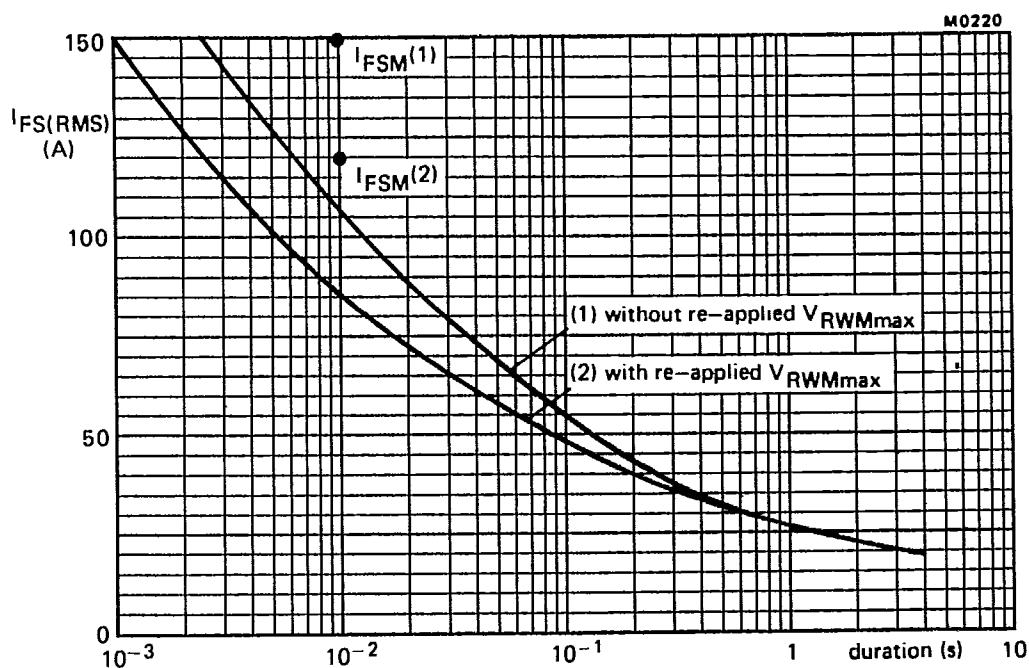


Fig.5 Maximum permissible non-repetitive r.m.s. forward current based on sinusoidal currents  
(f = 50 Hz);  $T_j = 150^\circ\text{C}$  prior to surge.

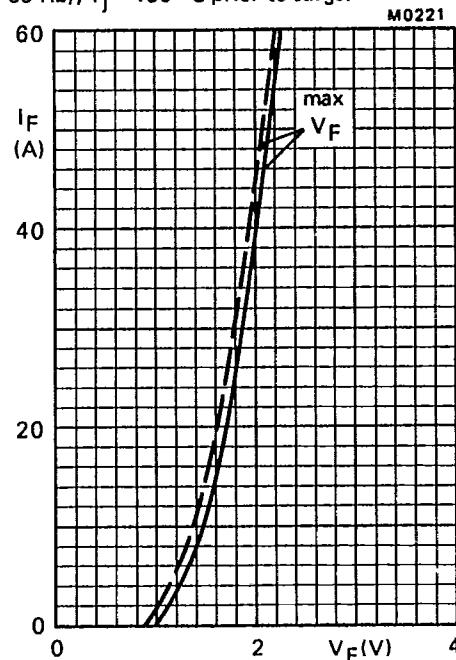


Fig.6. —  $T_j = 25^\circ\text{C}$ ; ---  $T_j = 100^\circ\text{C}$ .

PHILIPS INTERNATIONAL

56E D ■ 7110826 0041320 940 ■ PHIN

M0222

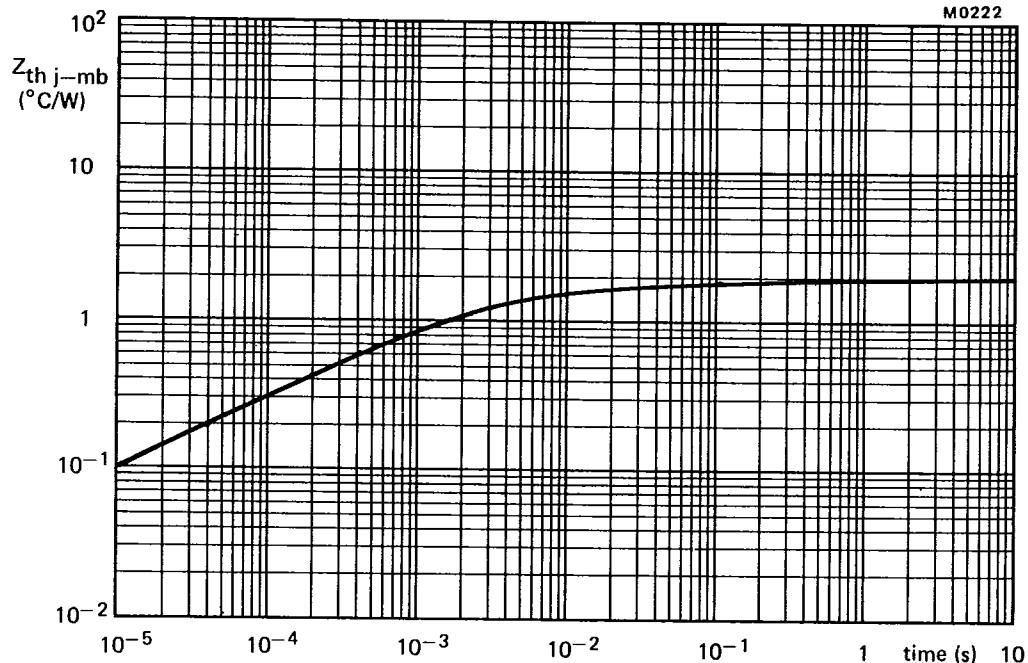


Fig.7