


# Datamate J-Tek Connectors

## Female Crimp Kit - Reverse Fix

- ❖ Allows for further flexibility in system design.
- ❖ Crimp contacts supplied loose and are inserted from rear.
- ❖ Part numbers are for a complete kit of a housing and the applicable number of contacts.
- ❖ Jackscrews are assembled.
- ❖ Mates with male Datamate J-Tek connectors with compatible Reverse Fix jackscrews.

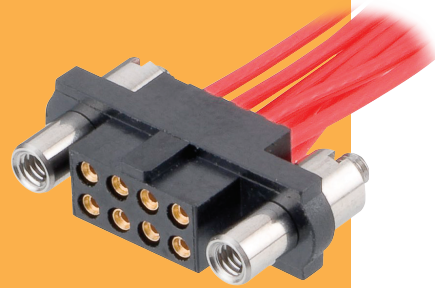

WITH JACKSCREWS	CALCULATION	WIRE STRIPPING DETAILS																																													
<p>No. 1 contact</p> <p>Board Mount Jackscrew</p>	<table border="1"> <tr> <td><b>A</b></td> <td><math>B + 12</math></td> </tr> <tr> <td><b>B</b></td> <td>Total no. of contacts - 2</td> </tr> <tr> <td><b>C</b></td> <td><math>B + 7</math></td> </tr> </table>	<b>A</b>	$B + 12$	<b>B</b>	Total no. of contacts - 2	<b>C</b>	$B + 7$																																								
	<b>A</b>	$B + 12$																																													
	<b>B</b>	Total no. of contacts - 2																																													
<b>C</b>	$B + 7$																																														
<p><b>Board Mount Nut, 2 per connector</b></p>	<table border="1"> <tr> <th colspan="2" style="background-color: #f4a460;">TOOLS</th> </tr> <tr> <td colspan="2"> <p><b>Recommended Crimp Tool</b> - M22520/2-01</p> <p><b>Positioner</b> - T5747</p> <p><b>Contact Insertion/Removal Tool</b> - Z80-280</p> <ul style="list-style-type: none"> <li>❖ Spare and pre-cabled contacts shown on following pages.</li> <li>❖ Instruction sheets available at <a href="http://www.harwin.com/instructions">www.harwin.com/instructions</a>.</li> </ul> </td> </tr> </table>	TOOLS		<p><b>Recommended Crimp Tool</b> - M22520/2-01</p> <p><b>Positioner</b> - T5747</p> <p><b>Contact Insertion/Removal Tool</b> - Z80-280</p> <ul style="list-style-type: none"> <li>❖ Spare and pre-cabled contacts shown on following pages.</li> <li>❖ Instruction sheets available at <a href="http://www.harwin.com/instructions">www.harwin.com/instructions</a>.</li> </ul>																																											
TOOLS																																															
<p><b>Recommended Crimp Tool</b> - M22520/2-01</p> <p><b>Positioner</b> - T5747</p> <p><b>Contact Insertion/Removal Tool</b> - Z80-280</p> <ul style="list-style-type: none"> <li>❖ Spare and pre-cabled contacts shown on following pages.</li> <li>❖ Instruction sheets available at <a href="http://www.harwin.com/instructions">www.harwin.com/instructions</a>.</li> </ul>																																															
<b>HOW TO ORDER</b>																																															
<p style="text-align: center;"><b>M80 - 4XX XX XX</b></p> <table border="1"> <tr> <th colspan="2" style="background-color: #f4a460;">SERIES CODE</th> </tr> <tr> <th colspan="2" style="background-color: #f4a460;">TYPE</th> </tr> <tr> <td><b>462</b></td> <td>Large Bore (22 AWG)</td> </tr> <tr> <td><b>463</b></td> <td>Small Bore (24-28 AWG)</td> </tr> <tr> <th colspan="2" style="background-color: #f4a460;">TOTAL NO. OF CONTACTS</th> </tr> <tr> <td colspan="2">04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50</td> </tr> <tr> <th colspan="2" style="background-color: #f4a460;">FINISH</th> </tr> <tr> <td><b>05</b></td> <td>Gold</td> </tr> <tr> <td><b>42</b></td> <td>Gold + Tin</td> </tr> </table> <p style="text-align: center;"><b>3.5mm Board Mount Jackscrews only</b></p>		SERIES CODE		TYPE		<b>462</b>	Large Bore (22 AWG)	<b>463</b>	Small Bore (24-28 AWG)	TOTAL NO. OF CONTACTS		04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50		FINISH		<b>05</b>	Gold	<b>42</b>	Gold + Tin	<p style="text-align: center;"><b>M80 - 4 X1 XX XX FX</b></p> <table border="1"> <tr> <th colspan="2" style="background-color: #f4a460;">SERIES CODE</th> </tr> <tr> <th colspan="2" style="background-color: #f4a460;">TYPE</th> </tr> <tr> <td><b>C1</b></td> <td>Small Bore (24-28 AWG)</td> </tr> <tr> <td><b>D1</b></td> <td>Large Bore (22 AWG)</td> </tr> <tr> <td><b>E1</b></td> <td>Extra Small Bore (28-32 AWG)</td> </tr> <tr> <th colspan="2" style="background-color: #f4a460;">TOTAL NO. OF CONTACTS</th> </tr> <tr> <td colspan="2">04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50</td> </tr> <tr> <th colspan="2" style="background-color: #f4a460;">FINISH</th> </tr> <tr> <td><b>05</b></td> <td>Gold</td> </tr> <tr> <td><b>42</b></td> <td>Gold + Tin</td> </tr> <tr> <th colspan="2" style="background-color: #f4a460;">JACKSCREW</th> </tr> <tr> <td><b>F8</b></td> <td>3.5mm Board Mount</td> </tr> <tr> <td><b>F9</b></td> <td>5mm Board Mount</td> </tr> </table>		SERIES CODE		TYPE		<b>C1</b>	Small Bore (24-28 AWG)	<b>D1</b>	Large Bore (22 AWG)	<b>E1</b>	Extra Small Bore (28-32 AWG)	TOTAL NO. OF CONTACTS		04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50		FINISH		<b>05</b>	Gold	<b>42</b>	Gold + Tin	JACKSCREW		<b>F8</b>	3.5mm Board Mount	<b>F9</b>	5mm Board Mount
SERIES CODE																																															
TYPE																																															
<b>462</b>	Large Bore (22 AWG)																																														
<b>463</b>	Small Bore (24-28 AWG)																																														
TOTAL NO. OF CONTACTS																																															
04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50																																															
FINISH																																															
<b>05</b>	Gold																																														
<b>42</b>	Gold + Tin																																														
SERIES CODE																																															
TYPE																																															
<b>C1</b>	Small Bore (24-28 AWG)																																														
<b>D1</b>	Large Bore (22 AWG)																																														
<b>E1</b>	Extra Small Bore (28-32 AWG)																																														
TOTAL NO. OF CONTACTS																																															
04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50																																															
FINISH																																															
<b>05</b>	Gold																																														
<b>42</b>	Gold + Tin																																														
JACKSCREW																																															
<b>F8</b>	3.5mm Board Mount																																														
<b>F9</b>	5mm Board Mount																																														

All dimensions in mm.