

---

# **HRW34**

Silicon Schottky Barrier Diode for High Frequency Rectifying

**HITACHI**

ADE-208-157B (Z)

Rev. 2

Nov. 1994

---


## **Features**

- Low forward voltage drop. ( $V_F = 0.80V$  max)
- High reverse voltage. ( $V_R = 90V$  max)

## **Ordering Information**

Type No.	Laser Mark	Package Code
HRW34	HRW34	TO-220AB

## **Pin Arrangement**

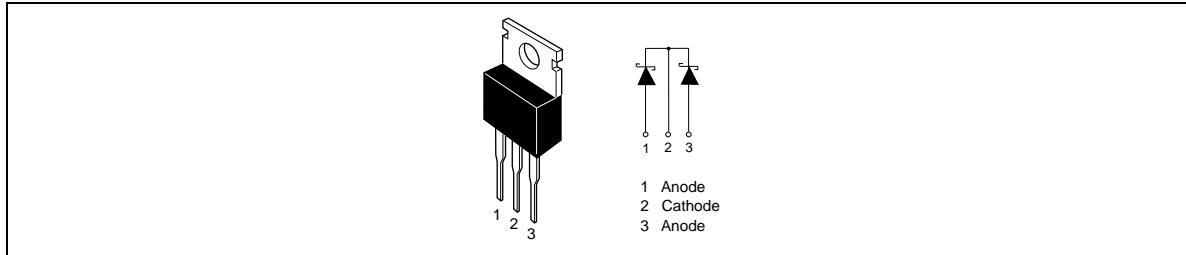

## HRW34

### Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )<sup>\*1</sup>

Item	Symbol	Value	Unit
Repetitive peak reverse voltage	$V_{RRM}$	90	V
Average forward current	$I_o^{*2}$	5	A
Non-Repetitive peak forward surge current	$I_{FSM}^{*3}$	60	A
Junction temperature	$T_j$	125	$^\circ\text{C}$
Storage temperature	$T_{STG}$	-40 to +125	$^\circ\text{C}$

- Notes:
1. Per one device
  2. Square wave, Duty (1/2),  $T_c = 95^\circ\text{C}$ , Sum of two devices
  3. Half sine wave 10msec

### Electrical Characteristics ( $T_a = 25^\circ\text{C}$ )<sup>\*</sup>

Item	Symbol	Min	Typ	Max	Unit	Test Condition
Forward voltage	$V_{F1}$	—	0.55	0.60	V	$I_F = 1.0\text{A}$
	$V_{F2}$	—	0.75	0.80		$I_F = 2.0\text{A}$
Reverse current	$I_R$	—	—	2.0	mA	$V_R = 90\text{V}$

Note: Per one device


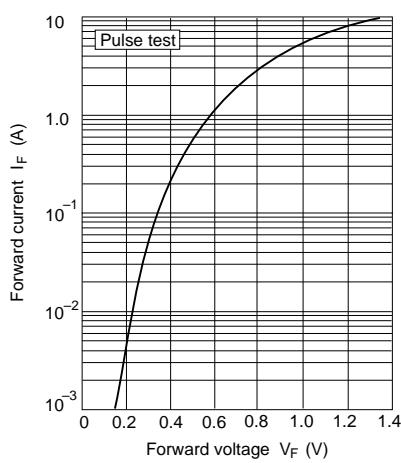


Fig.1 Forward current Vs. Forward voltage



**Fig.2 Reverse current Vs. Reverse voltage**

### Package Dimensions

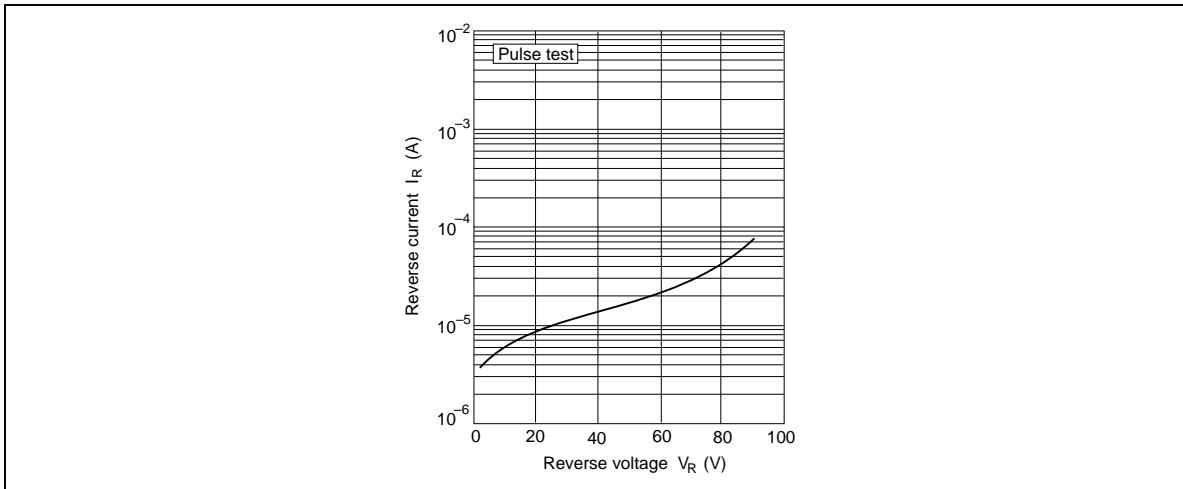