



HD74LS154 4-line-to-16-line Decoders/Demultiplexers

This decoder utilizes TTL circuitry to decode four binary-coded inputs into one of sixteen mutually exclusive outputs when both the strobe inputs, G1 and G2, are low. The demultiplexing function is performed by using the 4 input lines to address the output line, passing data from the one of the strobe inputs with the other strobe input low. When either strobe input is high, all outputs are high.

■ BLOCK DIAGRAM

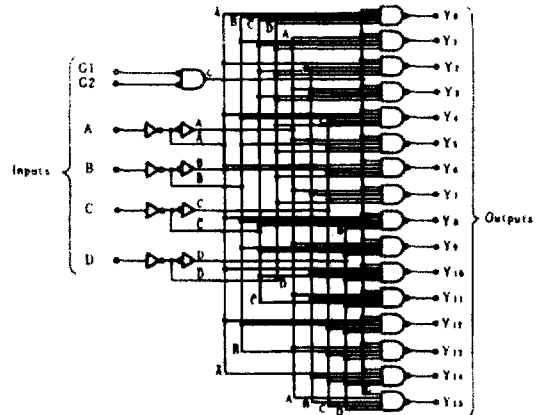

■ PIN ARRANGEMENT

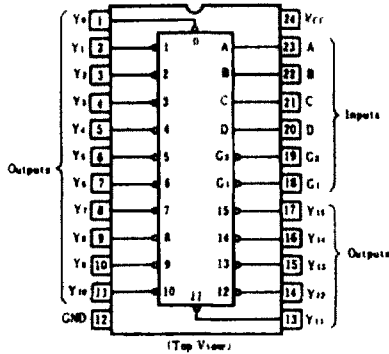

■ FUNCTION TABLE

| Inputs | | | | | | Outputs | | | | | | | | | | | | | | | | |
|--------|----|---|---|---|---|---------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|---|
| G1 | G2 | D | C | B | A | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | |
| L | L | L | L | L | L | L | H | H | H | H | H | H | H | H | H | H | H | H | H | H | H | H |
| L | L | L | L | L | H | H | L | H | H | H | H | H | H | H | H | H | H | H | H | H | H | H |
| L | L | L | L | H | L | H | H | L | H | H | H | H | H | H | H | H | H | H | H | H | H | H |
| L | L | L | L | H | H | H | H | H | L | H | H | H | H | H | H | H | H | H | H | H | H | H |
| L | L | L | H | L | L | H | H | H | H | L | H | H | H | H | H | H | H | H | H | H | H | H |
| L | L | L | H | H | L | H | H | H | H | H | L | H | H | H | H | H | H | H | H | H | H | H |
| L | L | L | H | H | H | H | H | H | H | H | H | L | H | H | H | H | H | H | H | H | H | H |
| L | L | H | L | L | L | H | H | H | H | H | H | H | L | H | H | H | H | H | H | H | H | H |
| L | L | H | L | L | H | H | H | H | H | H | H | H | H | L | H | H | H | H | H | H | H | H |
| L | L | H | L | H | L | H | H | H | H | H | H | H | H | H | L | H | H | H | H | H | H | H |
| L | L | H | L | H | H | H | H | H | H | H | H | H | H | H | H | L | H | H | H | H | H | H |
| L | L | H | H | L | L | H | H | H | H | H | H | H | H | H | H | H | L | H | H | H | H | H |
| L | L | H | H | H | L | H | H | H | H | H | H | H | H | H | H | H | H | L | H | H | H | H |
| L | L | H | H | H | H | H | H | H | H | H | H | H | H | H | H | H | H | H | L | H | H | H |
| L | H | X | X | X | X | H | H | H | H | H | H | H | H | H | H | H | H | H | H | H | H | H |
| H | L | X | X | X | X | H | H | H | H | H | H | H | H | H | H | H | H | H | H | H | H | H |
| H | H | X | X | X | X | H | H | H | H | H | H | H | H | H | H | H | H | H | H | H | H | H |

* H; high level, L; low level, X; irrelevant

HD74LS154

ELECTRICAL CHARACTERISTICS (Ta = -20 ~ +75°C)

| Item | Symbol | Test Conditions | min | typ* | max | Unit |
|------------------------------|-----------------|---|-----|------|------|------|
| Input voltage | V _{IN} | | 2.0 | — | — | V |
| | V _{IL} | | — | — | 0.8 | V |
| Output voltage | V _{OH} | V _{CC} = 4.75V, V _{IN} = 2V, V _{IL} = 0.8V, I _{OH} = -400μA | 2.7 | — | — | V |
| | V _{OL} | V _{CC} = 4.75V, V _{IN} = 2V, I _{OL} = 4mA | — | — | 0.4 | V |
| | | V _{CC} = 4.75V, V _{IN} = 2V, I _{OL} = 8mA | — | — | 0.5 | V |
| Input current | I _{IN} | V _{CC} = 5.25V, V _I = 2.7V | — | — | 20 | μA |
| | I _{IL} | V _{CC} = 5.25V, V _I = 0.4V | — | — | -0.4 | mA |
| | I _I | V _{CC} = 5.25V, V _I = 7V | — | — | 0.1 | mA |
| Short-circuit output current | I _{OS} | V _{CC} = 5.25V | -20 | — | -100 | mA |
| Supply current** | I _{CC} | V _{CC} = 5.25V | — | 9 | 14 | mA |
| Input clamp voltage | V _{IK} | V _{CC} = 4.75V, I _{IN} = -18mA | — | — | -1.5 | V |

* V_{CC} = 5V, T_a = 25°C


** I_{CC} is measured with all outputs open and all inputs grounded.

SWITCHING CHARACTERISTICS (V_{CC} = 5V, T_a = 25°C)


| Item | Symbol | Inputs | Outputs | Test Conditions | min | typ | max | Unit |
|------------------------|------------------|------------|----------------------------------|---|-----|-----|-----|------|
| Propagation delay time | t _{PLH} | A, B, C, D | Y ₀ ~ Y ₁₅ | C _L = 15pF, R _L = 2kΩ | — | 24 | 36 | ns |
| | t _{PHL} | A, B, C, D | Y ₀ ~ Y ₁₅ | | — | 22 | 33 | ns |
| | t _{PLH} | G1, G2 | Y ₀ ~ Y ₁₅ | | — | 20 | 30 | ns |
| | t _{PHL} | G1, G2 | Y ₀ ~ Y ₁₅ | | — | 18 | 27 | ns |

TESTING METHOD

1) Test Circuit

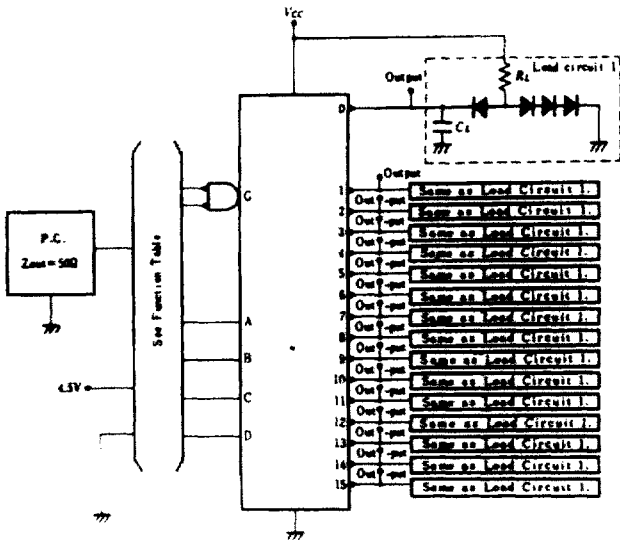

Waveform

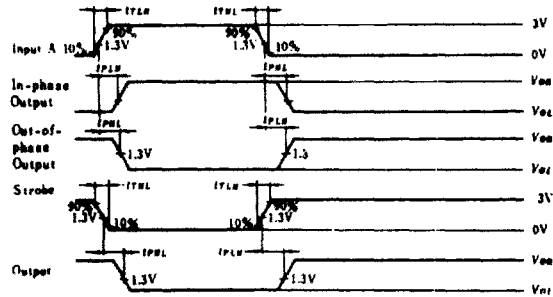

- Notes) 1. Input pulse; $t_{rLH} \leq 15\text{ns}$, $t_{fHL} \leq 6\text{ns}$, $PRR = 1\text{MHz}$, duty cycle = 50%
 2. C_L includes probe and jig capacitance.
 3. All diodes are 1S2074 (H).