

To our customers,

Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1st, 2010
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

Not recommended
for new design

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
 - “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
 - “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
 - “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

NPN EPITAXIAL SILICON TRANSISTOR IN ULTRA SUPER MINI-MOLD PACKAGE
FOR LOW-NOISE MICROWAVE AMPLIFICATION

FEATURES

- Low current consumption and high gain
 $|S_{21e}|^2 = 10.5 \text{ dB}_{\text{TYP.}} @ V_{\text{CE}} = 2 \text{ V}, I_{\text{c}} = 7 \text{ mA}, f = 2 \text{ GHz}$
 $|S_{21e}|^2 = 9.0 \text{ dB}_{\text{TYP.}} @ V_{\text{CE}} = 1 \text{ V}, I_{\text{c}} = 5 \text{ mA}, f = 2 \text{ GHz}$
- Ultra Super Mini-Mold package


ORDERING INFORMATION

PART NUMBER	QUANTITY	ARRANGEMENT
2SC5181	50 units/box	Embossed tape, 8 mm wide, pin No. 3 (collector) facing the perforation
2SC5181-T1	3 000 units/reel	

* Contact your NEC sales representatives to order samples for evaluation (available in batches of 50).

ABSOLUTE MAXIMUM RATINGS (T_A = 25 °C)

Collector to Base Voltage	V _{CB0}	5	V
Collector to Emitter Voltage	V _{CE0}	3	V
Emitter to Base Voltage	V _{EBO}	2	V
Collector Current	I _c	10	mA
Total Power Dissipation	P _T	30	mW
Junction Temperature	T _j	150	°C
Storage Temperature	T _{stg}	-65 to +150	°C

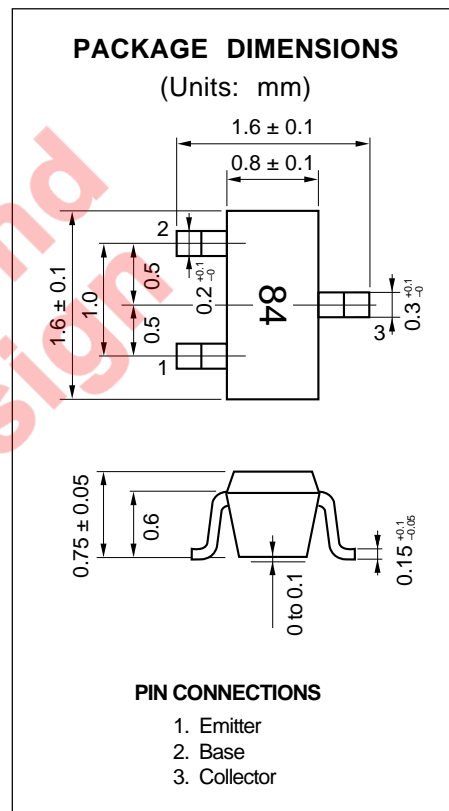

Caution; This transistor uses high-frequency technology. Be careful not to allow excessive current to flow through the transistor, including static electricity.

ELECTRICAL CHARACTERISTICS (T_A = 25 °C)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS
Collector Cutoff Current	I _{CEO}			100	nA	V _{CB} = 5 V, I _E = 0
Emitter Cutoff Current	I _{EB0}			100	nA	V _{EB} = 1 V, I _C = 0
DC Current Gain	h _{FE}	70		140		V _{CE} = 2 V, I _C = 7 mA* ¹
Insertion Power Gain (1)	S _{21e} ²	8.0	10.5		dB	V _{CE} = 2 V, I _C = 7 mA, f = 2 GHz
Insertion Power Gain (2)	S _{21e} ²	7.0	9.0		dB	V _{CE} = 1 V, I _C = 5 mA, f = 2 GHz
Noise Figure (1)	NF		1.5	2.0	dB	V _{CE} = 2 V, I _C = 3 mA, f = 2 GHz
Noise Figure (2)	NF		1.5	2.0	dB	V _{CE} = 1 V, I _C = 3 mA, f = 2 GHz
Gain Bandwidth Product (1)	f _T	10	13		GHz	V _{CE} = 2 V, I _C = 7 mA, f = 2 GHz
Gain Bandwidth Product (2)	f _T	8.5	12		GHz	V _{CE} = 1 V, I _C = 5 mA, f = 2 GHz
Feedback Capacitance	C _{re}		0.4	0.6	pF	V _{CB} = 2 V, I _E = 0 mA, f = 1 MHz* ²

*1. Measured with pulses: Pulse width ≤ 350 μs, duty cycle ≤ 2 %, pulsed







*2. Measured with a three-terminal bridge. The emitter and case terminal are connected to the guard terminal of the bridge.

h_{FE} Class


Class	FB
Marking	84
h _{FE}	70 to 140

Not recommended
for new design


CHARACTERISTICS CURVES (T_A = 25 °C)

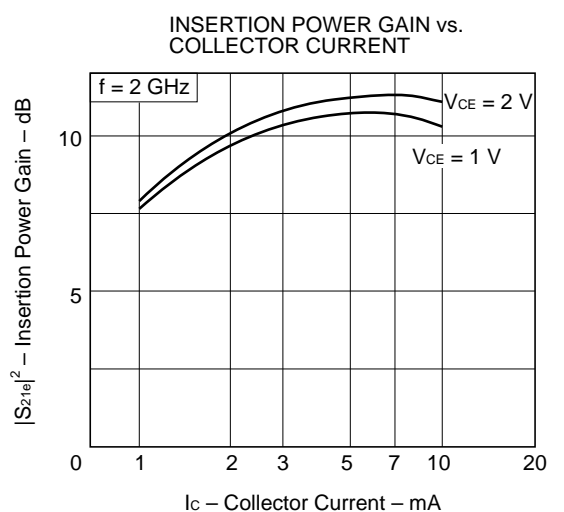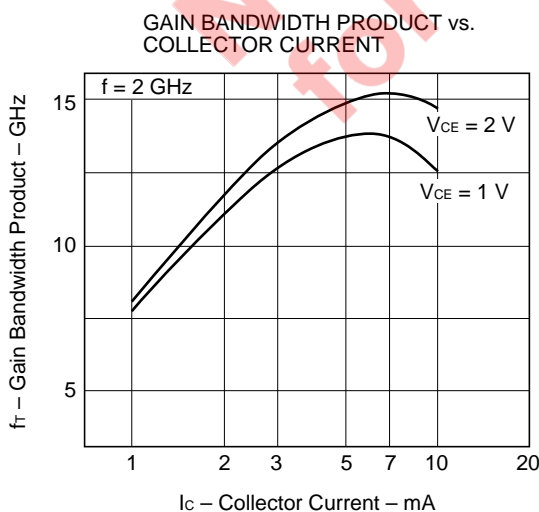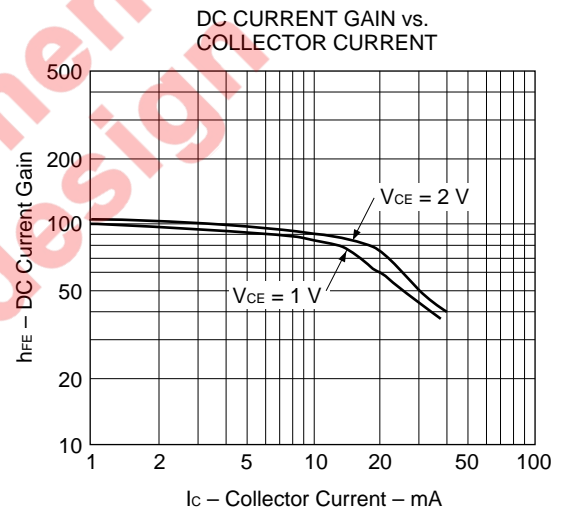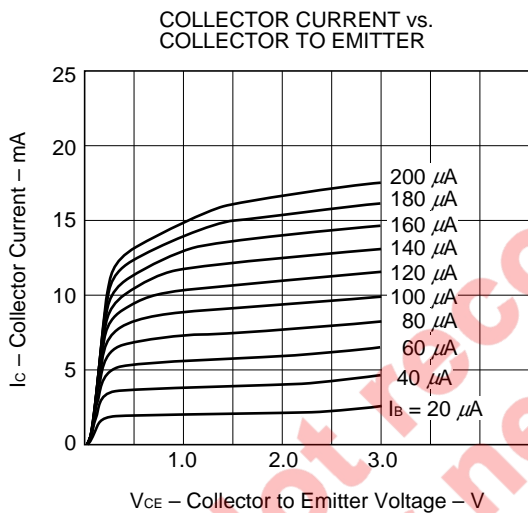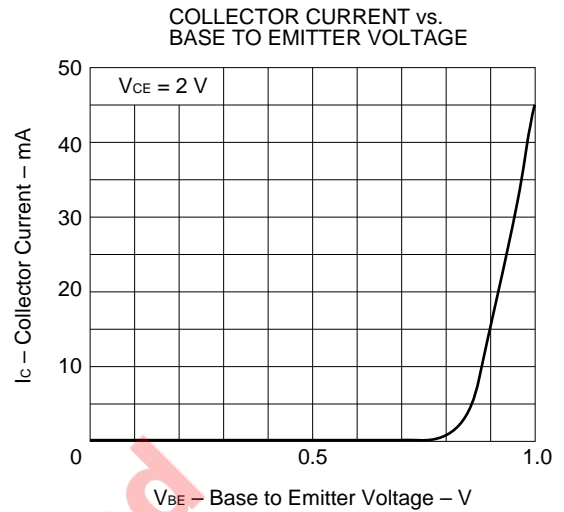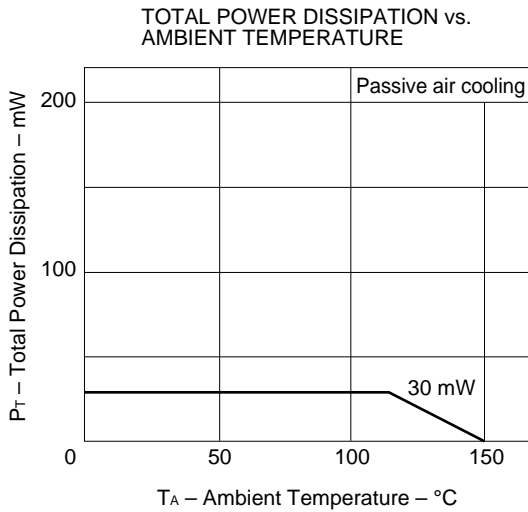

NOISE FIGURE vs. COLLECTOR CURRENT

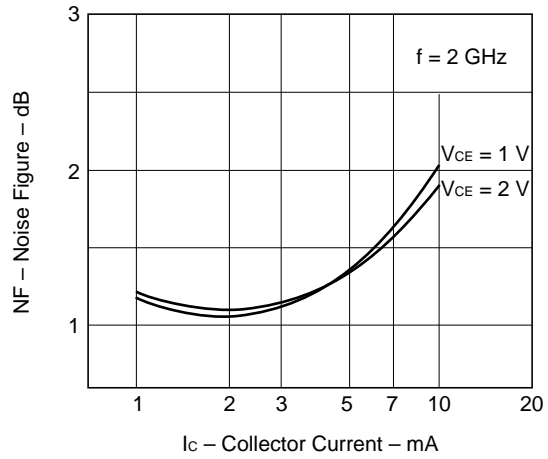

FEED-BACK CAPACITANCE vs. COLLECTOR TO BASE VOLTAGE

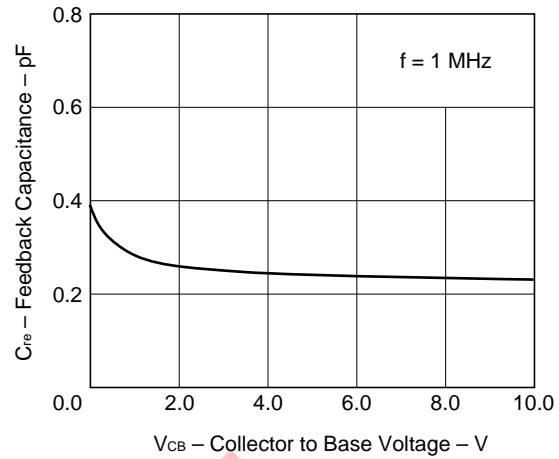

Not recommend for new design

S-PARAMETERS

V_{CE} = 1 V, I_c = 1 mA, Z_o = 50 Ω

FREQUENCY	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
600.00	0.892	-31.5	3.159	142.3	0.113	64.7	0.934	-25.9
800.00	0.795	-40.9	2.964	130.8	0.152	58.9	0.847	-32.1
1000.00	0.704	-50.9	2.762	119.7	0.180	53.0	0.759	-39.9
1200.00	0.653	-60.1	2.674	110.1	0.204	49.8	0.726	-47.4
1400.00	0.598	-66.6	2.590	103.0	0.228	45.9	0.688	-53.1
1600.00	0.524	-73.7	2.409	94.9	0.253	42.5	0.636	-58.2
1800.00	0.464	-80.6	2.285	87.2	0.265	41.3	0.575	-64.2
2000.00	0.415	-88.8	2.182	81.7	0.270	39.6	0.530	-68.9
2200.00	0.355	-97.7	2.032	74.6	0.278	35.7	0.495	-74.6

V_{CE} = 1 V, I_c = 3 mA, Z_o = 50 Ω

FREQUENCY	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
600.00	0.653	-48.4	6.121	124.0	0.095	59.6	0.754	-37.3
800.00	0.517	-59.5	5.199	111.4	0.123	55.7	0.629	-43.1
1000.00	0.422	-68.5	4.502	100.6	0.143	53.0	0.533	-49.5
1200.00	0.362	-76.1	4.084	92.8	0.165	53.5	0.493	-54.2
1400.00	0.301	-81.4	3.661	86.8	0.183	51.6	0.448	-57.6
1600.00	0.245	-88.0	3.279	79.5	0.204	50.1	0.411	-61.1
1800.00	0.209	-92.7	3.024	74.1	0.220	49.7	0.369	-66.7
2000.00	0.175	-105.8	2.796	70.4	0.230	50.0	0.334	-69.5
2200.00	0.132	-121.6	2.535	64.5	0.244	46.8	0.311	-75.0

V_{CE} = 1 V, I_c = 3 mA, Z_o = 50 Ω

FREQUENCY	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
600.00	0.514	-56.3	7.156	115.3	0.082	57.8	0.648	-40.3
800.00	0.389	-66.9	5.830	103.5	0.109	57.0	0.530	-44.6
1000.00	0.307	-73.5	4.939	93.6	0.131	56.4	0.446	-48.9
1200.00	0.253	-79.7	4.391	86.9	0.151	56.4	0.414	-52.5
1400.00	0.202	-85.5	3.865	81.4	0.175	55.2	0.379	-55.2
1600.00	0.157	-91.8	3.440	74.7	0.196	53.8	0.347	-58.4
1800.00	0.130	-96.2	3.155	70.1	0.213	53.5	0.313	-63.6
2000.00	0.108	-116.1	2.900	67.0	0.227	53.3	0.283	-65.6
2200.00	0.077	-142.5	2.614	61.5	0.241	50.7	0.268	-71.7

V_{CE} = 1 V, I_c = 7 mA, Z_o = 50 Ω

FREQUENCY	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
600.00	0.405	-61.9	7.590	109.4	0.077	59.1	0.570	-40.5
800.00	0.305	-72.5	6.043	98.4	0.101	59.0	0.469	-43.6
1000.00	0.229	-78.2	5.059	89.2	0.124	57.9	0.399	-46.6
1200.00	0.184	-84.9	4.454	83.2	0.145	59.2	0.374	-49.4
1400.00	0.141	-91.4	3.886	78.0	0.169	57.6	0.347	-51.8
1600.00	0.106	-98.8	3.455	71.6	0.191	56.2	0.322	-54.5
1800.00	0.086	-104.3	3.162	67.6	0.210	55.3	0.290	-59.5
2000.00	0.071	-136.6	2.898	64.6	0.224	55.9	0.264	-61.4
2200.00	0.060	-174.6	2.606	59.4	0.237	52.7	0.249	-67.2

$V_{CE} = 1\text{ V}$, $I_c = 10\text{ mA}$, $Z_o = 50\ \Omega$

FREQUENCY	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
600.00	0.324	-71.3	7.550	104.5	0.069	62.8	0.526	-39.4
800.00	0.232	-82.5	5.924	94.2	0.096	61.0	0.434	-40.5
1000.00	0.167	-89.5	4.927	85.5	0.119	59.7	0.375	-42.1
1200.00	0.128	-98.6	4.307	80.0	0.141	61.4	0.355	-44.8
1400.00	0.094	-110.3	3.740	74.9	0.165	60.6	0.335	-47.0
1600.00	0.067	-127.3	3.326	68.7	0.187	58.2	0.314	-49.2
1800.00	0.055	-140.2	3.041	64.9	0.207	57.6	0.283	-54.0
2000.00	0.068	-176.6	2.781	62.2	0.219	57.4	0.262	-56.1
2200.00	0.083	153.2	2.498	56.9	0.235	54.8	0.247	-62.0

$V_{CE} = 2\text{ V}$, $I_c = 1\text{ mA}$, $Z_o = 50\ \Omega$

FREQUENCY	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
600.00	0.901	-29.6	3.172	143.7	0.106	66.0	0.940	-24.4
800.00	0.811	-38.5	2.995	132.6	0.143	59.6	0.861	-30.3
1000.00	0.719	-47.8	2.797	121.7	0.172	55.0	0.778	-37.6
1200.00	0.671	-56.7	2.715	112.2	0.196	51.4	0.745	-45.0
1400.00	0.621	-62.9	2.646	105.3	0.220	47.9	0.712	-50.5
1600.00	0.549	-69.2	2.467	97.5	0.240	44.4	0.659	-55.0
1800.00	0.488	-75.6	2.343	89.8	0.255	43.6	0.601	-60.8
2000.00	0.438	-83.6	2.243	84.3	0.261	41.6	0.556	-65.6
2200.00	0.380	-91.1	2.095	77.3	0.268	37.8	0.522	-70.9

$V_{CE} = 2\text{ V}$, $I_c = 3\text{ mA}$, $Z_o = 50\ \Omega$

FREQUENCY	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
600.00	0.678	-44.9	6.256	125.7	0.088	60.5	0.778	-34.8
800.00	0.543	-55.3	5.350	113.4	0.114	56.1	0.656	-40.4
1000.00	0.447	-63.1	4.650	102.7	0.137	54.8	0.563	-46.1
1200.00	0.388	-69.9	4.225	94.8	0.157	54.2	0.519	-50.7
1400.00	0.325	-74.0	3.809	88.9	0.176	53.1	0.481	-54.5
1600.00	0.270	-78.9	3.408	81.8	0.195	51.3	0.441	-57.3
1800.00	0.231	-82.5	3.144	76.3	0.214	51.5	0.397	-62.3
2000.00	0.193	-93.2	2.918	72.7	0.223	51.1	0.363	-65.0
2200.00	0.148	-103.1	2.647	66.8	0.236	48.8	0.343	-70.0

$V_{CE} = 2\text{ V}$, $I_c = 5\text{ mA}$, $Z_o = 50\ \Omega$

FREQUENCY	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
600.00	0.539	-51.7	7.390	117.1	0.080	61.7	0.676	-37.8
800.00	0.415	-61.1	6.057	105.3	0.103	58.5	0.560	-41.6
1000.00	0.332	-66.2	5.136	95.5	0.125	57.5	0.478	-45.6
1200.00	0.280	-71.9	4.579	88.7	0.146	58.5	0.445	-49.2
1400.00	0.228	-74.8	4.043	83.3	0.168	57.3	0.413	-51.6
1600.00	0.183	-78.2	3.597	76.8	0.187	55.4	0.383	-54.0
1800.00	0.157	-80.9	3.298	72.2	0.207	55.4	0.345	-58.9
2000.00	0.123	-95.6	3.042	69.1	0.218	55.5	0.317	-61.2
2200.00	0.084	-108.3	2.746	63.7	0.232	52.6	0.301	-66.0

$V_{CE} = 2\text{ V}$, $I_c = 7\text{ mA}$, $Z_o = 50\ \Omega$

FREQUENCY	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
600.00	0.442	-56.3	7.920	111.3	0.070	63.0	0.610	-38.1
800.00	0.331	-65.1	6.345	100.3	0.097	59.0	0.507	-40.7
1000.00	0.257	-67.8	5.311	91.1	0.118	57.7	0.434	-43.4
1200.00	0.213	-73.1	4.689	85.1	0.141	60.4	0.407	-45.9
1400.00	0.168	-74.5	4.103	80.1	0.162	59.5	0.386	-48.0
1600.00	0.132	-77.3	3.643	73.8	0.184	58.3	0.359	-50.5
1800.00	0.110	-79.7	3.335	69.8	0.204	57.4	0.323	-54.8
2000.00	0.081	-99.2	3.065	66.9	0.214	57.5	0.301	-56.9
2200.00	0.048	-123.7	2.760	61.7	0.231	54.8	0.286	-62.3

$V_{CE} = 2\text{ V}$, $I_c = 10\text{ mA}$, $Z_o = 50\ \Omega$

FREQUENCY	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
600.00	0.358	-60.7	8.135	106.8	0.068	61.8	0.565	-36.5
800.00	0.264	-68.8	6.411	96.5	0.090	62.0	0.475	-38.3
1000.00	0.199	-70.8	5.335	87.8	0.113	61.6	0.414	-40.1
1200.00	0.158	-75.7	4.674	82.4	0.139	62.5	0.392	-42.2
1400.00	0.121	-77.9	4.068	77.5	0.157	61.1	0.377	-44.8
1600.00	0.089	-80.4	3.610	71.4	0.180	59.7	0.352	-46.6
1800.00	0.073	-82.4	3.301	67.8	0.198	59.3	0.321	-50.6
2000.00	0.052	-114.2	3.027	65.1	0.211	58.9	0.298	-52.5
2200.00	0.030	-166.0	2.724	59.9	0.228	56.0	0.286	-58.0

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.

Anti-radioactive design is not implemented in this product.