

2. Noise Suppression Devices SPIKE KILLER™

RoHS compliant products

Standard Specifications

SPIKE KILLER™

Type No.	Finished Dimensions *1 [mm]			Core Size [mm] *2			Effective core cross section Ae[mm ²] *2	Mean Flux Path Length Lm [mm] *2	Total Flux ϕ_c [μ Wb]min *3	Coercive Force Hc[A/m] *3	Rectangular Ratio *3 Br/Bm[%]	Insulating Cover
	O.D.	I.D.	H.T.	O.D.	I.D.	H.T.						
SS7X4X3W	9.1	3.3	4.8	7.5	4.5	3.0	3.38	18.8	3.15	22max	90min	PET case Black
SS10X7X4.5W	11.5	5.8	6.6	10.0	7.0	4.5	5.06	26.7	4.73			
SS14X8X4.5W	15.8	6.8	6.6	14.0	8.0	4.5	10.1	34.6	9.46			


*1 Tolerance ± 0.2 [mm] *2 Reference value
 *3 Measuring condition: 100kHz, 80A/m (sine wave), R.T.

☆ "SPIKE KILLER™" : Registered trademarks of TOSHIBA MATERIALS Co., Ltd.
 ☆ "SPIKE KILLER™" : Resistered in U.S.A., France, Germany, U.K., Japan.




Wired SPIKE KILLER™ and AMOBEADS™

Type No.	Core No.	Current *1 [A]	Wire Dia. [ϕ mm]	N [turn]	Flux *2 [uWb]	Dimensions[mm]	
						A max	B max
AB44DY0305	AB4x2x4.5DY	0.5	0.3	5	13.5	7	9
AB44DY0307	AB4x2x4.5DY	0.5	0.3	7	18.9	7	9
SS07S0309	SS7x4x3W	0.5	0.3	9	28.3	12	8
AB34DY0402	AB3x2x4.5DY	1.0	0.4	2	2.6	6	9
AB34DY0403	AB3x2x4.5DY	1.0	0.4	3	3.9	6	9
AB44DY0402	AB4x2x4.5DY	1.0	0.4	2	5.4	7	9
AB44DY0403	AB4x2x4.5DY	1.0	0.4	3	8.1	7	9
AB44DY0404	AB4x2x4.5DY	1.0	0.4	4	10.8	7	9
SS07S0507	SS7x4x3W	1.5	0.5	7	22.1	12	8
SS07S0510	SS7x4x3W	1.5	0.5	10	31.5	12	8
SS07S0515	SS7x4x3W	1.5	0.5	15	47.3	12	8
SS10S05105	SS10x7x4.5W	1.5	0.5	5	23.7	14	10
SS10S05107	SS10x7x4.5W	1.5	0.5	7	33.1	14	10
SS10S05110	SS10x7x4.5W	1.5	0.5	10	47.3	14	10
SS10S09110	SS10x7x4.5W	5	0.9	10	47.3	15	11
SS14S09108	SS14x8x4.5W	5	0.9	8	75.7	20	11
SS14S09205	SS14x8x4.5W	10	0.9x2	5	47.3	20	11

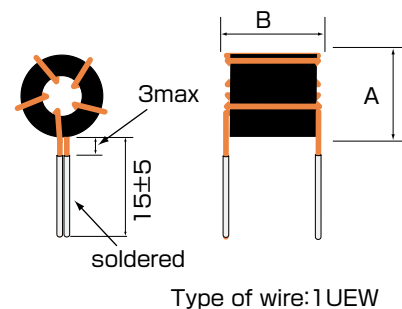


*1: Typical Value, using a cross section of winding wire
 *2: Total Flux of core \times turn

Example of applied circuit and it's characteristic

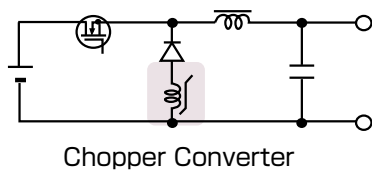


Testing Condition of Radiant Noise Measurement	
Input	20[V]
Output	12[V] / 2[A]
Frequency	90kHz
Rectifier	FRD
Detector	Simple Loop Antenna

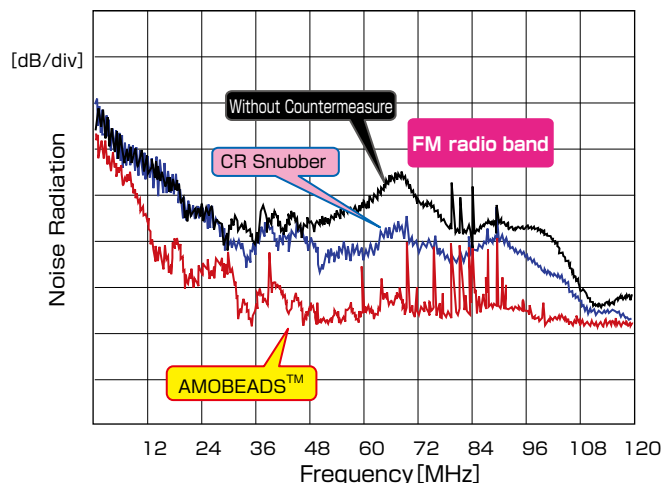


Examples of Applied Circuits and Effects of Noise Suppression

Example Circuit: Self-Exciting Single Flyback (RCC)

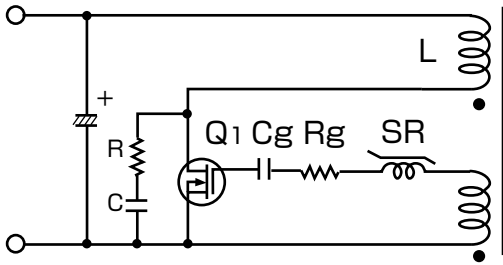

SR:Wired AMOBEADS™

JPN.P. No. 3190775 Toshiba Materials Co. Ltd.
 USP No. 5745353 //

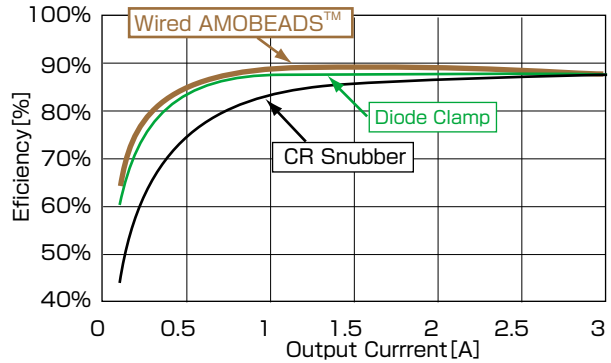

Power Supply Efficiency (V_{in} :DC 140V, V_o :24V)

Example of Effects (Delaytor)

Diode Clamp
(68kΩ, 0.022μF)




CR Snubber
(10Ω, 1500pF)

Wired AMOBEADS™
AB44DY0307 applied

Switching
Waveform

V_{ds}
100V/div




I_d
1A/div

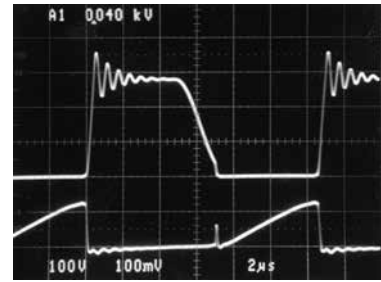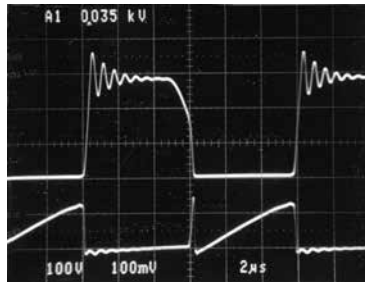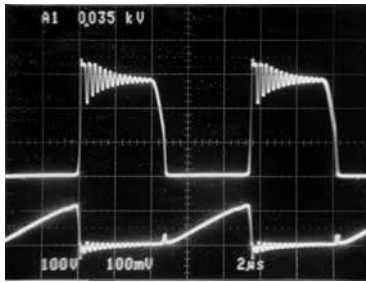

Turn-on
Waveform




V_{ds}
100V/div

I_d
0.5A/div

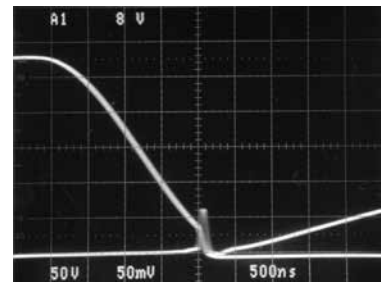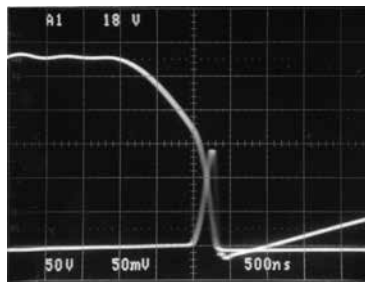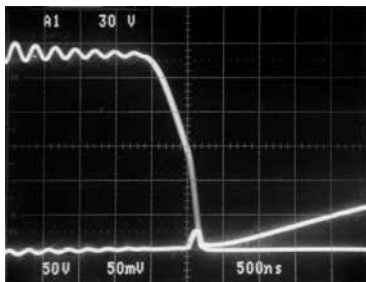

Output Voltage
Noise

V_n
20mV/div

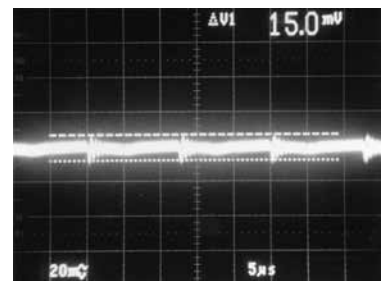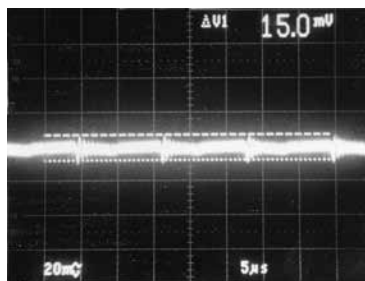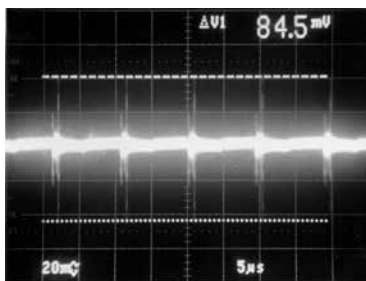

Wired AMOBEADS™ delay the turn-on time of the MOSFET when they are inserted between the gate of the MOSFET and drive winding on the primary side of the self-exciting single flyback (RCC). The wired AMOBEADS™ reduce both noise, due to surge current and switching loss, by turning on the switching element at the point when the voltage of the transformer becomes low, utilizing the LC resonance phenomenon induced by inductance L of the primary winding of the transformer and a snubber capacitor C.

Note : The diode clamp circuit has a tendency to increase the out put noise.

RESTRICTIONS ON PRODUCT USE

Toshiba Corporation and its subsidiaries and affiliates are collectively referred to as "TOSHIBA".
Hardware, software and systems described in this document are collectively referred to as "Product".

- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product may be subject to characteristic changes, damage, or malfunction due to changes in the environment, such as temperature or atmosphere. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which characteristic change, damage and malfunction of Product could cause loss of human life, bodily injury or damage to property. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, and the data sheets and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.
- PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE"). Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, lifesaving and/or life supporting medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, and devices related to power plant. IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT. For details, please contact your TOSHIBA sales representative or contact us via our website.
- Do not disassemble, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.
- Some of Product have Pb (lead). The powders and vapors in these Products are harmful to the human body. Please prevent exposure to these Products when destroying, processing, or chemically treating them.
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.

TOSHIBA MATERIALS CO., LTD. **Overseas Sales & Marketing Department**

1-1, Shibaura 1-Chome, Minato-ku, Tokyo 105-8001, Japan

Tel: +81-3-3457-4874 Fax: +81-3-5444-9235

<http://www.toshiba-tmat.co.jp/tmat/eng/>

■ **Toshiba America Electronic Components, Inc.** <Advanced Materials Division>

290 Donald Lynch Boulevard, Suite 201, Marlborough, MA 01752, U.S.A.

Tel: +1-508-303-5041

Fax: +1-508-481-8890

■ **Toshiba Electronics Asia (Hong Kong), Ltd.**

Level 11, Tower 2, Grand Century Place, No.193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong

Tel: +852-2375-6111

Fax: +852-2375-0969

■ **Toshiba Electronics Asia (Singapore) Pte. Ltd.**

20 Pasir Panjang Road, #13-27/28 Mapletree Business City, Singapore 117439

Tel: +65-6278-5252

Fax: +65-6271-5155

■ **Toshiba Electronics (China) Co., Ltd.**

5th Floor, Wheelock Square 1717 West Nanjing Road, Jingan District, Shanghai, China 200040

Shenzhen Office

28/F, Excellence Times Square Building, 4068 Yi Tian Road, Fu Tian District, Shenzhen, China 518048

TEL: +86-755-2399-6897

FAX: +86-755-2399-5573