


# TLC251, TLC251A, TLC251B, TLC251Y LinCMOS™ PROGRAMMABLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS001E - JULY 1983 - REVISED AUGUST 1994

- Wide Range of Supply Voltages  
1.4 V to 16 V
- True Single-Supply Operation
- Common-Mode Input Voltage Range  
Includes the Negative Rail
- Low Noise . . . 30 nV/ $\sqrt{\text{Hz}}$  Typ at 1 kHz  
(High Bias)
- ESD Protection Exceeds 2000 V Per  
MIL-STD-833C, Method 3015.1

D OR P PACKAGE  
(TOP VIEW)

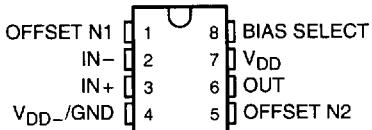

symbol

## description

The TLC251C, TLC251AC, and TLC251BC are low-cost, low-power programmable operational amplifiers designed to operate with single or dual supplies. Unlike traditional metal-gate CMOS operational amplifiers, these devices utilize Texas Instruments silicon-gate LinCMOS™ process, giving them stable input offset voltages without sacrificing the advantages of metal-gate CMOS.

This series of parts is available in selected grades of input offset voltage and can be nulled with one external potentiometer. Because the input common-mode range extends to the negative rail and the power consumption is extremely low, this family is ideally suited for battery-powered or energy-conserving applications. A bias-select pin can be used to program one of three ac performance and power-dissipation levels to suit the application. The series features operation down to a 1.4-V supply and is stable at unity gain.

These devices have internal electrostatic-discharge (ESD) protection circuits that prevent catastrophic failures at voltages up to 2000 V as tested under MIL-STD-833C, Method 3015.1. However, care should be exercised in handling these devices as exposure to ESD may result in a degradation of the device parametric performance.

Because of the extremely high input impedance and low input bias and offset currents, applications for the TLC251C series include many areas that have previously been limited to BIFET and NFET product types. Any circuit using high-impedance elements and requiring small offset errors is a good candidate for cost-effective use of these devices. Many features associated with bipolar technology are available with LinCMOS™ operational amplifiers without the power penalties of traditional bipolar devices. Remote and inaccessible equipment applications are possible using the low-voltage and low-power capabilities of the TLC251C series.

In addition, by driving the bias-select input with a logic signal from a microprocessor, these operational amplifiers can have software-controlled performance and power consumption. The TLC251C series is well suited to solve the difficult problems associated with single battery and solar cell-powered applications.

The TLC251C series is characterized for operation from 0°C to 70°C.

## AVAILABLE OPTIONS

TA	VI <sub>O</sub> <sup>max</sup> AT 25°C	PACKAGED DEVICES		CHIP FORM (Y)
		SMALL OUTLINE (D)	PLASTIC DIP (P)	
0°C to 70°C	10 mV	TLC251CD	TLC251CP	TLC251Y
	5 mV	TLC251ACD	TLC251ACP	—
	2 mV	TLC251BCD	TLC251BCP	—

The D package is available taped and reeled. Add the suffix R to the device type (e.g., TLC251CDR). Chips are tested at 25°C.

LinCMOS is a trademark of Texas Instruments Incorporated

8961724 0106421 407

PRODUCTION DATA information is current as of publication date.  
Products conform to specifications per the terms of Texas Instruments  
standard warranty. Production processing does not necessarily include  
testing of all parameters.

Copyright © 1994, Texas Instruments Incorporated




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**TLC251, TLC251A, TLC251B, TLC251Y**  
**LinCMOS™ PROGRAMMABLE**  
**LOW-POWER OPERATIONAL AMPLIFIERS**

SLOS001E - JULY 1983 - REVISED AUGUST 1994

schematic

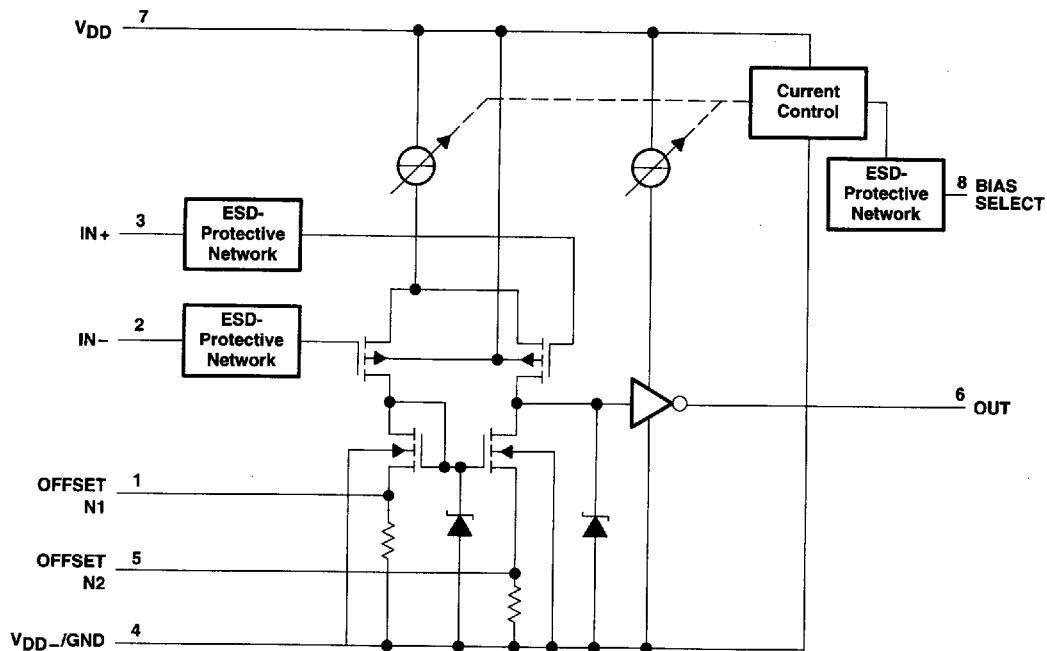

■ 8961724 0106422 343 ■




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**TLC251, TLC251A, TLC251B, TLC251Y**  
**LinCMOS™ PROGRAMMABLE**  
**LOW-POWER OPERATIONAL AMPLIFIERS**  
SLOS001E - JULY 1983 - REVISED AUGUST 1994

**TLC251Y chip information**

These chips, properly assembled, display characteristics similar to the TLC251C. Thermal compression or ultrasonic bonding may be used on the doped-aluminum bonding pads. Chips may be mounted with conductive epoxy or a gold-silicon preform.

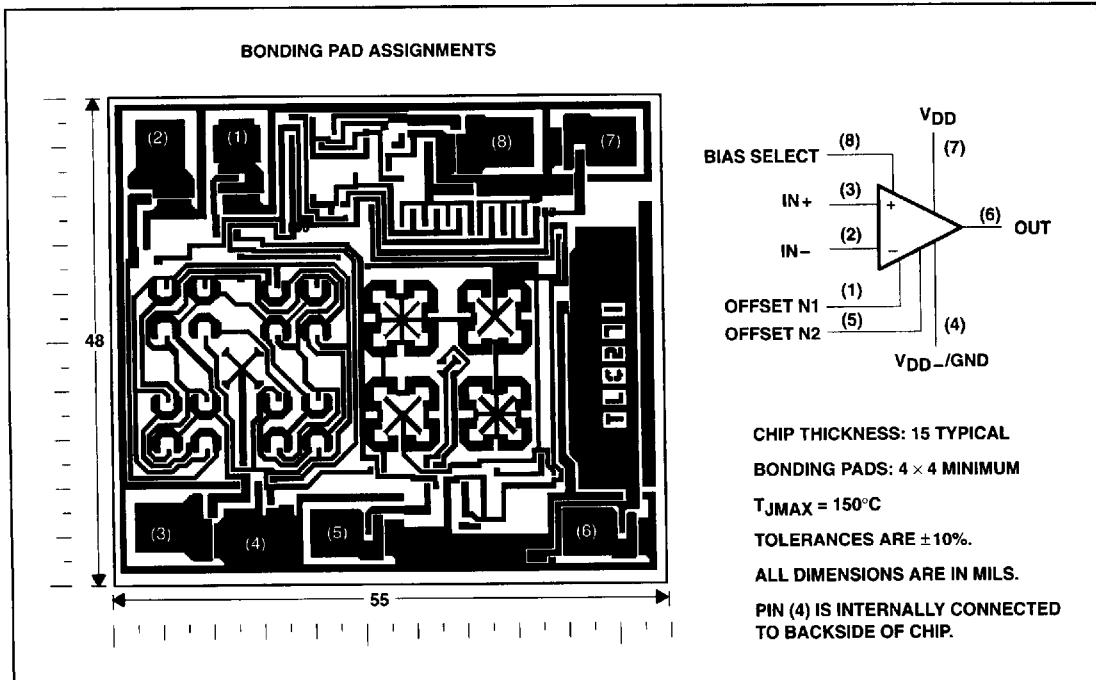

8961724 0106423 28T

 **TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

3-359

**TLC251, TLC251A, TLC251B, TLC251Y**  
**LinCMOS™ PROGRAMMABLE**  
**LOW-POWER OPERATIONAL AMPLIFIERS**

SLOS001E - JULY 1983 - REVISED AUGUST 1994

**absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†**

Supply voltage, $V_{DD}$ (see Note 1)	18 V
Differential input voltage, $V_{ID}$ (see Note 2)	$\pm 18$ V
Input voltage range, $V_I$ (any input)	-0.3 V to 18 V
Duration of short circuit at (or below) 25°C free-air temperature (see Note 3)	unlimited
Continuous total dissipation	See Dissipation Rating Table
Operating free-air temperature range, $T_A$	0°C to 70°C
Storage temperature range	-65°C to 150°C
Lead temperature 1.6 mm (1/16 inch) from case for 10 seconds	260°C

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltage values, except differential voltages, are with respect to  $V_{DD\_GND}$ .  
 2. Differential voltages are at  $IN_+$  with respect to  $IN_-$ .  
 3. The output may be shorted to either supply. Temperature and/or supply voltages must be limited to ensure the maximum dissipation rating is not exceeded.

**DISSIPATION RATING TABLE**

PACKAGE	$T_A \leq 25^\circ\text{C}$ POWER RATING	DERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$	$T_A = 70^\circ\text{C}$ POWER RATING
D	725 mW	5.8 mW/°C	464 mW
P	1000 mW	8.0 mW/°C	640 mW

**recommended operating conditions**

		MIN	MAX	UNIT
Supply voltage, $V_{DD}$		1.4	16	V
Common-mode input voltage, $V_{IC}$	$V_{DD} = 1.4$ V	0	0.2	V
	$V_{DD} = 5$ V	-0.2	4	
	$V_{DD} = 10$ V	-0.2	9	
	$V_{DD} = 16$ V	-0.2	14	
Operating free-air temperature, $T_A$		0	70	°C
Bias-select voltage		See Application Information		

■ ■ ■ 8961724 0106424 116 ■ ■ ■



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**TLC251, TLC251A, TLC251B, TLC251Y**  
**LinCMOS™ PROGRAMMABLE**  
**LOW-POWER OPERATIONAL AMPLIFIERS**  
 SLOS001E - JULY 1983 - REVISED AUGUST 1994

**HIGH-BIAS MODE**

**electrical characteristics at specified free-air temperature**

PARAMETER		TEST CONDITIONS	TA†	TLC251C, TLC251AC, TLC251BC						UNIT	
				V <sub>DD</sub> = 5 V			V <sub>DD</sub> = 10 V				
				MIN	TYP	MAX	MIN	TYP	MAX		
V <sub>IO</sub>	Input offset voltage	V <sub>O</sub> = 1.4 V, V <sub>IC</sub> = 0 V, R <sub>S</sub> = 50 Ω, R <sub>L</sub> = 10 kΩ	25°C	1.1	10		1.1	10		mV	
			Full range		12			12			
			25°C	0.9	5		0.9	5			
			Full range		6.5			6.5			
			25°C	0.34	2		0.39	2			
			Full range		3			3			
αV <sub>IO</sub>	Average temperature coefficient of input offset voltage		25°C to 70°C	1.8			2			μV/°C	
I <sub>IO</sub>	Input offset current (see Note 4)	V <sub>O</sub> = V <sub>DD</sub> /2, V <sub>IC</sub> = V <sub>DD</sub> /2	25°C	0.1			0.1			pA	
			70°C	7	300		7	300			
I <sub>IB</sub>	Input bias current (see Note 4)	V <sub>O</sub> = V <sub>DD</sub> /2, V <sub>IC</sub> = V <sub>DD</sub> /2	25°C	0.6			0.7			pA	
			70°C	40	600		50	600			
V <sub>ICR</sub>	Common-mode input voltage range (see Note 5)		25°C	-0.2 to 4	-0.3 to 4.2		-0.2 to 9	-0.3 to 9.2		V	
			Full range	-0.2 to 3.5			-0.2 to 8.5			V	
			25°C	3.2	3.8		8	8.5		V	
			0°C	3	3.8		7.8	8.5			
V <sub>OH</sub>	High-level output voltage	V <sub>ID</sub> = 100 mV, R <sub>L</sub> = 10 kΩ	70°C	3	3.8		7.8	8.4			
			25°C	0	50		0	50		mV	
			0°C	0	50		0	50			
V <sub>OL</sub>	Low-level output voltage	V <sub>ID</sub> = -100 mV, I <sub>OL</sub> = 0	70°C	0	50		0	50			
			25°C	5	23		10	36		V/mV	
			0°C	4	27		7.5	42			
AVD	Large-signal differential voltage amplification	R <sub>L</sub> = 10 kΩ, See Note 6	70°C	4	20		7.5	32			
			25°C	65	80		65	85		dB	
			0°C	60	84		60	88			
CMRR	Common-mode rejection ratio	V <sub>IC</sub> = V <sub>ICR</sub> min	70°C	60	85		60	88			
			25°C	65	95		65	95		dB	
			0°C	60	94		60	94			
k <sub>SVR</sub>	Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ )	V <sub>DD</sub> = 5 V to 10 V, V <sub>O</sub> = 1.4 V	70°C	60	96		60	96			
			25°C	-	1.4		-	1.9		μA	
			0°C	675	1600		950	2000		μA	
I <sub>DD</sub>	Supply current	V <sub>O</sub> = V <sub>DD</sub> /2, V <sub>IC</sub> = V <sub>DD</sub> /2, No load	70°C	775	1800		1125	2200			
			25°C	575	1300		750	1700			

† Full range is 0°C to 70°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.

6. At V<sub>DD</sub> = 5 V, V<sub>O</sub> = 0.25 V to 2 V; at V<sub>DD</sub> = 10 V, V<sub>O</sub> = 1 V to 6 V.

8961724 0106425 052

 **TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**TLC251, TLC251A, TLC251B, TLC251Y**  
**LinCMOS™ PROGRAMMABLE**  
**LOW-POWER OPERATIONAL AMPLIFIERS**

SLOS001E – JULY 1983 – REVISED AUGUST 1994

**HIGH-BIAS MODE**

**operating characteristics,  $V_{DD} = 5 \text{ V}$**

PARAMETER	TEST CONDITIONS	$T_A$	TLC251C, TLC251AC, TLC251BC			UNIT
			MIN	TYP	MAX	
SR Slew rate at unity gain	$R_L = 10 \text{ k}\Omega$ , $C_L = 20 \text{ pF}$	$V_I(\text{PP}) = 1 \text{ V}$	25°C	3.6		$\text{V}/\mu\text{s}$
			0°C	4		
			70°C	3		
		$V_I(\text{PP}) = 2.5 \text{ V}$	25°C	2.9		
			0°C	3.1		
			70°C	2.5		
$V_n$ Equivalent input noise voltage	$f = 1 \text{ kHz}$ , $R_S = 20 \Omega$	25°C	25			$\text{nV}/\sqrt{\text{Hz}}$
$B_{OM}$ Maximum output-swing bandwidth	$V_O = V_{OH}$ , $C_L = 20 \text{ pF}$ , $R_L = 10 \text{ k}\Omega$	25°C	320			$\text{kHz}$
		0°C	340			
		70°C	260			
$B_1$ Unity-gain bandwidth	$V_I = 10 \text{ mV}$ , $C_L = 20 \text{ pF}$	25°C	1.7			$\text{MHz}$
		0°C	2			
		70°C	1.3			
$\phi_m$ Phase margin	$V_I = 10 \text{ mV}$ , $f = B_1$ , $C_L = 20 \text{ pF}$	25°C	46°			
		0°C	47°			
		70°C	44°			

**operating characteristics,  $V_{DD} = 10 \text{ V}$**

PARAMETER	TEST CONDITIONS	$T_A$	TLC251C, TLC251AC, TLC251BC			UNIT
			MIN	TYP	MAX	
SR Slew rate at unity gain	$R_L = 10 \text{ k}\Omega$ , $C_L = 20 \text{ pF}$	$V_I(\text{PP}) = 1 \text{ V}$	25°C	5.3		$\text{V}/\mu\text{s}$
			0°C	5.9		
			70°C	4.3		
		$V_I(\text{PP}) = 5.5 \text{ V}$	25°C	4.6		
			0°C	5.1		
			70°C	3.8		
$V_n$ Equivalent input noise voltage	$f = 1 \text{ kHz}$ , $R_S = 20 \Omega$	25°C	25			$\text{nV}/\sqrt{\text{Hz}}$
$B_{OM}$ Maximum output-swing bandwidth	$V_O = V_{OH}$ , $C_L = 20 \text{ pF}$ , $R_L = 10 \text{ k}\Omega$	25°C	200			$\text{kHz}$
		0°C	220			
		70°C	140			
$B_1$ Unity-gain bandwidth	$V_I = 10 \text{ mV}$ , $C_L = 20 \text{ pF}$	25°C	2.2			$\text{MHz}$
		0°C	2.5			
		70°C	1.8			
$\phi_m$ Phase margin	$V_I = 10 \text{ mV}$ , $f = B_1$ , $C_L = 20 \text{ pF}$	25°C	49°			
		0°C	50°			
		70°C	46°			

8961724 0106426 T99



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

TLC251, TLC251A, TLC251B, TLC251Y  
 LinCMOS™ PROGRAMMABLE  
 LOW-POWER OPERATIONAL AMPLIFIERS  
 SLOS001E – JULY 1983 – REVISED AUGUST 1994

**MEDIUM-BIAS MODE**

**electrical characteristics at specified free-air temperature**

PARAMETER		TEST CONDITIONS	TA†	TLC251C, TLC251AC, TLC251BC			UNIT	
				V <sub>DD</sub> = 5 V				
				MIN	TYP	MAX		
V <sub>IO</sub>	Input offset voltage	V <sub>O</sub> = 1.4 V, V <sub>IC</sub> = 0 V, R <sub>S</sub> = 50 Ω, R <sub>L</sub> = 10 kΩ	25°C	1.1	10	1.1	10	
			Full range		12		12	
			25°C	0.9	5	0.9	5	
	TLC251AC		Full range		6.5		6.5	
			25°C	0.34	2	0.39	2	
			Full range		3		3	
αV <sub>IO</sub>	Average temperature coefficient of input offset voltage		25°C to 70°C		1.7		2.1	
I <sub>IO</sub>	Input offset current (see Note 4)	V <sub>O</sub> = V <sub>DD</sub> /2, V <sub>IC</sub> = V <sub>DD</sub> /2	25°C	0.1		0.1	pA	
			70°C	7	300	7		
I <sub>IB</sub>	Input bias current (see Note 4)	V <sub>O</sub> = V <sub>DD</sub> /2, V <sub>IC</sub> = V <sub>DD</sub> /2	25°C	0.6		0.7	pA	
			70°C	40	600	50		
V <sub>ICR</sub>	Common-mode input voltage range (see Note 5)		25°C	-0.2 to 4	-0.3 to 4.2	-0.2 to 9	V	
			Full range	-0.2 to 3.5		-0.2 to 8.5	V	
			25°C	3.2	3.9	8	8.7	
			0°C	3	3.9	7.8	8.7	
V <sub>OH</sub>	High-level output voltage	V <sub>ID</sub> = 100 mV, R <sub>L</sub> = 10 kΩ	70°C	3	4	7.8	8.7	
			25°C	0	50	0	50	
			0°C	0	50	0	50	
V <sub>OL</sub>	Low-level output voltage	V <sub>ID</sub> = -100 mV, I <sub>OL</sub> = 0	70°C	0	50	0	50	
			25°C	25	170	25	275	
			0°C	15	200	15	320	
AVD	Large-signal differential voltage amplification	R <sub>L</sub> = 10 kΩ, See Note 6	70°C	15	140	15	230	
			25°C	65	91	65	94	
			0°C	60	91	60	94	
CMRR	Common-mode rejection ratio	V <sub>IC</sub> = V <sub>ICRmin</sub>	70°C	60	92	60	94	
			25°C	70	93	70	93	
			0°C	60	92	60	92	
k <sub>SVR</sub>	Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ )	V <sub>DD</sub> = 5 V to 10 V, V <sub>O</sub> = 1.4 V	70°C	60	94	60	94	
			25°C	70	93	70	93	
			0°C	60	92	60	92	
I <sub>I(SEL)</sub>	Input current (BIAS SELECT)	V <sub>I(SEL)</sub> = V <sub>DD</sub> /2	70°C	60	94	60	94	
			25°C	-130		-160	nA	
			0°C	105	280	143	300	
I <sub>DD</sub>	Supply current	V <sub>O</sub> = V <sub>DD</sub> /2, V <sub>IC</sub> = V <sub>DD</sub> /2, No load	70°C	125	320	173	400	
			25°C	85	220	110	280	
			0°C				μA	

† Full range is 0°C to 70°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.

6. At V<sub>DD</sub> = 5 V, V<sub>O</sub> = 0.25 V to 2 V; at V<sub>DD</sub> = 10 V, V<sub>O</sub> = 1 V to 6 V.

8961724 0106427 925



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**TLC251, TLC251A, TLC251B, TLC251Y**  
**LinCMOS™ PROGRAMMABLE**  
**LOW-POWER OPERATIONAL AMPLIFIERS**

SLOS001E – JULY 1983 – REVISED AUGUST 1994

**MEDIUM-BIAS MODE**

**operating characteristics,  $V_{DD} = 5\text{ V}$**

PARAMETER	TEST CONDITIONS	TA	TLC251C, TLC251AC, TLC251BC			UNIT
			MIN	TYP	MAX	
SR Slew rate at unity gain	$R_L = 100\text{ k}\Omega$ , $C_L = 20\text{ pF}$	$V_I(\text{PP}) = 1\text{ V}$	25°C	0.43		$\text{V}/\mu\text{s}$
			0°C	0.46		
			70°C	0.36		
		$V_I(\text{PP}) = 2.5\text{ V}$	25°C	0.40		
			0°C	0.43		
			70°C	0.34		
$V_n$ Equivalent input noise voltage	$f = 1\text{ kHz}$ , $R_S = 20\text{ }\Omega$	25°C	32			$\text{nV}/\sqrt{\text{Hz}}$
B <sub>OM</sub> Maximum output-swing bandwidth	$V_O = V_{OH}$ , $C_L = 20\text{ pF}$ , $R_L = 100\text{ k}\Omega$	25°C	55			$\text{kHz}$
		0°C	60			
		70°C	50			
B <sub>1</sub> Unity-gain bandwidth	$V_I = 10\text{ mV}$ , $C_L = 20\text{ pF}$	25°C	525			$\text{kHz}$
		0°C	600			
		70°C	400			
$\phi_m$ Phase margin	$V_I = 10\text{ mV}$ , $f = B_1$ , $C_L = 20\text{ pF}$	25°C	40°			
		0°C	41°			
		70°C	39°			

**operating characteristics,  $V_{DD} = 10\text{ V}$**

PARAMETER	TEST CONDITIONS	TA	TLC251C, TLC251AC, TLC251BC			UNIT
			MIN	TYP	MAX	
SR Slew rate at unity gain	$R_L = 100\text{ k}\Omega$ , $C_L = 20\text{ pF}$	$V_I(\text{PP}) = 1\text{ V}$	25°C	0.62		$\text{V}/\mu\text{s}$
			0°C	0.67		
			70°C	0.51		
		$V_I(\text{PP}) = 5.5\text{ V}$	25°C	0.56		
			0°C	0.61		
			70°C	0.46		
$V_n$ Equivalent input noise voltage	$f = 1\text{ kHz}$ , $R_S = 20\text{ }\Omega$	25°C	32			$\text{nV}/\sqrt{\text{Hz}}$
B <sub>OM</sub> Maximum output-swing bandwidth	$V_O = V_{OH}$ , $C_L = 20\text{ pF}$ , $R_L = 100\text{ k}\Omega$	25°C	35			$\text{kHz}$
		0°C	40			
		70°C	30			
B <sub>1</sub> Unity-gain bandwidth	$V_I = 10\text{ mV}$ , $C_L = 20\text{ pF}$	25°C	635			$\text{kHz}$
		0°C	710			
		70°C	510			
$\phi_m$ Phase margin	$V_I = 10\text{ mV}$ , $f = B_1$ , $C_L = 20\text{ pF}$	25°C	43°			
		0°C	44°			
		70°C	42°			

8961724 0106428 861



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

TLC251, TLC251A, TLC251B, TLC251Y  
 LinCMOS™ PROGRAMMABLE  
 LOW-POWER OPERATIONAL AMPLIFIERS

SLOS001E – JULY 1983 – REVISED AUGUST 1994

**LOW-BIAS MODE**

**electrical characteristics at specified free-air temperature**

PARAMETER		TEST CONDITIONS	TA†	TLC251C, TLC251AC, TLC251BC			UNIT	
				V <sub>DD</sub> = 5 V				
				MIN	TYP	MAX		
V <sub>IO</sub>	Input offset voltage	V <sub>O</sub> = 1.4 V, V <sub>IC</sub> = 0 V, R <sub>S</sub> = 50 Ω, R <sub>L</sub> = 10 MΩ	25°C	1.1	10	1.1	10	
			Full range		12		12	
			25°C	0.9	5	0.9	5	
			Full range		6.5		6.5	
			25°C	0.24	2	0.26	2	
			Full range		3		3	
αV <sub>IO</sub>	Average temperature coefficient of input offset voltage		25°C to 70°C	1.1		1	μV/°C	
I <sub>IO</sub>	Input offset current (see Note 4)	V <sub>O</sub> = V <sub>DD</sub> /2, V <sub>IC</sub> = V <sub>DD</sub> /2	25°C	0.1		0.1	pA	
			70°C	7	300	7		
I <sub>IB</sub>	Input bias current (see Note 4)	V <sub>O</sub> = V <sub>DD</sub> /2, V <sub>IC</sub> = V <sub>DD</sub> /2	25°C	0.6		0.7	pA	
			70°C	40	600	50		
V <sub>ICR</sub>	Common-mode input voltage range (see Note 5)		25°C	-0.2 to 4	-0.3 to 4.2	-0.2 to 9	V	
			Full range	-0.2 to 3.5	-0.2 to 8.5	-0.2 to 9.2	V	
V <sub>OH</sub>	High-level output voltage	V <sub>ID</sub> = 100 mV, R <sub>L</sub> = 1 MΩ	25°C	3.2	4.1	8	8.9	
			0°C	3	4.1	7.8	8.9	
			70°C	3	4.2	7.8	8.9	
V <sub>OL</sub>	Low-level output voltage	V <sub>ID</sub> = -100 mV, I <sub>OL</sub> = 0	25°C	0	50	0	50	
			0°C	0	50	0	50	
			70°C	0	50	0	50	
A <sub>yD</sub>	Large-signal differential voltage amplification	R <sub>L</sub> = 1 MΩ, See Note 6	25°C	50	520	50	870	
			0°C	50	700	50	1030	
			70°C	50	380	50	660	
CMRR	Common-mode rejection ratio	V <sub>IC</sub> = V <sub>ICRmin</sub>	25°C	65	94	65	97	
			0°C	60	95	60	97	
			70°C	60	95	60	97	
k <sub>SVR</sub>	Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ )	V <sub>DD</sub> = 5 V to 10 V, V <sub>O</sub> = 1.4 V	25°C	70	97	70	97	
			0°C	60	97	60	97	
			70°C	60	98	60	98	
I <sub>I(SEL)</sub>	Input current (BIAS SELECT)	V <sub>I(SEL)</sub> = V <sub>DD</sub>	25°C	65		95	nA	
I <sub>DD</sub>	Supply current	V <sub>O</sub> = V <sub>DD</sub> /2, V <sub>IC</sub> = V <sub>DD</sub> /2, No load	25°C	10	17	14	23	
			0°C	12	21	18	33	
			70°C	8	14	11	20	

† Full range is 0°C to 70°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.

6. At V<sub>DD</sub> = 5 V, V<sub>O</sub> = 0.25 V to 2 V; at V<sub>DD</sub> = 10 V, V<sub>O</sub> = 1 V to 6 V.

8961724 0106429 7T8



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**TLC251, TLC251A, TLC251B, TLC251Y**  
**LinCMOS™ PROGRAMMABLE**  
**LOW-POWER OPERATIONAL AMPLIFIERS**

SLOS001E - JULY 1983 - REVISED AUGUST 1994

**LOW-BIAS MODE**

**operating characteristics,  $V_{DD} = 5\text{ V}$**

PARAMETER	TEST CONDITIONS	TA	TLC251C, TLC251AC, TLC251BC			UNIT
			MIN	TYP	MAX	
SR Slew rate at unity gain	$R_L = 1\text{ M}\Omega$ , $C_L = 20\text{ pF}$	$V_I(\text{PP}) = 1\text{ V}$	25°C	0.03		V/ $\mu\text{s}$
			0°C	0.04		
			70°C	0.03		
			25°C	0.03		
	$V_I(\text{PP}) = 2.5\text{ V}$		0°C	0.03		
			70°C	0.02		
$V_n$ Equivalent input noise voltage	$f = 1\text{ kHz}$ , $R_S = 20\text{ }\Omega$	25°C	68			nV/ $\sqrt{\text{Hz}}$
$B_{OM}$ Maximum output-swing bandwidth	$V_O = V_{OH}$ , $C_L = 20\text{ pF}$ , $R_L = 1\text{ M}\Omega$	25°C	5			kHz
$B_1$ Unity-gain bandwidth	$V_I = 10\text{ mV}$ , $C_L = 20\text{ pF}$		0°C	6		kHz
			70°C	4.5		
			25°C	85		
			0°C	100		
$\phi_m$ Phase margin	$V_I = 10\text{ mV}$ , $f = B_1$ , $C_L = 20\text{ pF}$		70°C	65		
			25°C	34°		
			0°C	36°		
			70°C	30°		

**operating characteristics,  $V_{DD} = 10\text{ V}$**

PARAMETER	TEST CONDITIONS	TA	TLC251C, TLC251AC, TLC251BC			UNIT
			MIN	TYP	MAX	
SR Slew rate at unity gain	$R_L = 1\text{ M}\Omega$ , $C_L = 20\text{ pF}$	$V_I(\text{PP}) = 1\text{ V}$	25°C	0.05		V/ $\mu\text{s}$
			0°C	0.05		
			70°C	0.04		
			25°C	0.04		
	$V_I(\text{PP}) = 5.5\text{ V}$		0°C	0.05		
			70°C	0.04		
$V_n$ Equivalent input noise voltage	$f = 1\text{ kHz}$ , $R_S = 20\text{ }\Omega$	25°C	68			nV/ $\sqrt{\text{Hz}}$
$B_{OM}$ Maximum output-swing bandwidth	$V_O = V_{OH}$ , $C_L = 20\text{ pF}$ , $R_L = 1\text{ M}\Omega$	25°C	1			kHz
$B_1$ Unity-gain bandwidth	$V_I = 10\text{ mV}$ , $C_L = 20\text{ pF}$		0°C	1.3		kHz
			70°C	0.9		
			25°C	110		
			0°C	125		
$\phi_m$ Phase margin	$V_I = 10\text{ mV}$ , $f = B_1$ , $C_L = 20\text{ pF}$		70°C	90		
			25°C	38°		
			0°C	40°		
			70°C	34°		

8961724 0106430 41T



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**TLC251, TLC251A, TLC251B, TLC251Y**  
**LinCMOS™ PROGRAMMABLE**  
**LOW-POWER OPERATIONAL AMPLIFIERS**  
 SLOS001E - JULY 1983 - REVISED AUGUST 1994

**electrical characteristics at specified free-air temperature,  $V_{DD} = 1.4$  V**

PARAMETER		TEST CONDITIONS†	$T_A^{\ddagger}$	BIAS	TLC251C, TLC251AC, TLC251BC			UNIT
					MIN	TYP	MAX	
$V_{IO}$ Input offset voltage	TLC251C	$V_O = 0.2$ V, $R_S = 50 \Omega$	25°C	Any	10			mV
	TLC251AC		Full range		12			
	TLC251BC		25°C	Any	5			
			Full range		6.5			
			25°C	Any	2			
			Full range		3			
$\alpha_{VIO}$	Average temperature coefficient of input offset voltage		25°C to 70°C	Any	1			µV/°C
$I_{IO}$ Input offset current		$V_O = 0.2$ V	25°C	Any	1			pA
			Full range		300			
$I_{IB}$ Input bias current		$V_O = 0.2$ V	25°C	Any	1			pA
			Full range		600			
$V_{ICR}$	Common-mode input voltage range		25°C	Any	0 to 0.2			V
$V_{OM}$	Peak output voltage swing§	$V_{ID} = 100$ mV	25°C	Any	450	700		mV
$AVD$ Large-signal differential voltage amplification		$V_O = 100$ to $300$ mV, $R_S = 50 \Omega$	25°C	Low	20			
				High	10			
$CMRR$	Common-mode rejection ratio	$R_S = 50 \Omega$ , $V_O = 0.2$ V, $V_{IC} = V_{ICR\min}$	25°C	Any	60	77		dB
$I_{DD}$ Supply current		$V_O = 0.2$ V, No load	25°C	Low	5	17		µA
				High	150	190		

† All characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified. Unless otherwise noted, an output load resistor is connected from the output to ground and has the following values: for low bias,  $R_L = 1 \text{ M}\Omega$ , for medium bias,  $R_L = 100 \text{ k}\Omega$ , and for high bias,  $R_L = 10 \text{ k}\Omega$ .

‡ Full range is 0°C to 70°C.

§ The output swings to the potential of  $V_{DD-}/\text{GND}$ .

**operating characteristics,  $V_{DD} = 1.4$  V,  $T_A = 25^\circ\text{C}$**

PARAMETER		TEST CONDITIONS	BIAS	TLC251C, TLC251AC, TLC251BC			UNIT
				MIN	TYP	MAX	
$B_1$ Unity-gain bandwidth		$C_L = 100 \text{ pF}$	Low	12			kHz
			High	12			
$SR$ Slew rate at unity gain		See Figure 1	Low	0.001			$\text{V}/\mu\text{s}$
			High	0.1			
Overshoot factor		See Figure 1	Low	35%			
			High	30%			

■ 8961724 0106431 356 ■



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**TLC251, TLC251A, TLC251B, TLC251Y**  
**LinCMOS™ PROGRAMMABLE**  
**LOW-POWER OPERATIONAL AMPLIFIERS**

SLOS001E - JULY 1983 - REVISED AUGUST 1994

**electrical characteristics,  $V_{DD} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$**

PARAMETER	TEST CONDITIONS	TLC251Y						UNIT		
		HIGH-BIAS MODE			MEDIUM-BIAS MODE					
		MIN	TYP	MAX	MIN	TYP	MAX			
$V_{IO}$	$V_O = 1.4\text{ V}$ , $V_{IC} = 0\text{ V}$ , $R_S = 50\text{ }\Omega$ , $R_L \dagger$	1.1	10		1.1	10		1.1	10	mV
$\alpha V_{IO}$	Average temperature coefficient of input offset voltage		1.8		1.7			1.1		$\mu\text{V}/^\circ\text{C}$
$I_{IO}$	Input offset current (see Note 4)	$V_O = V_{DD}/2$ , $V_{IC} = V_{DD}/2$	0.1		0.1			0.1		pA
$I_{IB}$	Input bias current (see Note 4)	$V_O = V_{DD}/2$ , $V_{IC} = V_{DD}/2$	0.6		0.6			0.6		pA
$V_{ICR}$	Common-mode input voltage range (see Note 5)		-0.2 to 4	-0.3 to 4.2	-0.2 to 4	-0.3 to 4.2		-0.2 to 4	-0.3 to 4.2	V
$V_{OH}$	High-level output voltage	$V_{ID} = 100\text{ mV}$ , $R_L \dagger$	3.2	3.8	3.2	3.9		3.2	4.1	V
$V_{OL}$	Low-level output voltage	$V_{ID} = -100\text{ mV}$ , $I_{OL} = 0$	0	50	0	50		0	50	mV
$AVD$	Large-signal differential voltage amplification	$V_O = 0.25\text{ V}$ , $R_L \dagger$	5	23	25	170		50	480	V/mV
CMRR	Common-mode rejection ratio	$V_{IC} = V_{ICR\min}$	65	80	65	91		65	94	dB
$k_{SVR}$	Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_O$ )	$V_{DD} = 5\text{ V to }10\text{ V}$ , $V_O = 1.4\text{ V}$	65	95	70	93		70	97	dB
$I_{I(SEL)}$	Input current (BIAS SELECT)	$V_I(SEL) = V_{DD}/2$	-1.4		-0.13			0.065		$\mu\text{A}$
$I_{DD}$	Supply current	$V_O = V_{DD}/2$ , $V_{IC} = V_{DD}/2$ , No load	675	1600	105	280		10	17	$\mu\text{A}$

<sup>†</sup>For high-bias mode,  $R_L = 10\text{ k}\Omega$ ; for medium-bias mode,  $R_L = 100\text{ k}\Omega$ ; and for low-bias mode,  $R_L = 1\text{ M}\Omega$ .

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.

TLC251, TLC251A, TLC251B, TLC251Y  
**LinCMOS™ PROGRAMMABLE  
 LOW-POWER OPERATIONAL AMPLIFIERS**  
 SLOS001E – JULY 1983 – REVISED AUGUST 1994

operating characteristics,  $V_{DD} = 5$  V,  $T_A = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	TLC251Y						UNIT	
		HIGH-BIAS MODE			MEDIUM-BIAS MODE				
		MIN	TYP	MAX	MIN	TYP	MAX		
SR	Slew rate at unity gain	$R_L \dagger$ , $C_L = 20$ pF	$V_I(\text{PP}) = 1$ V	3.6	0.43	0.03	V/ $\mu$ s		
			$V_I(\text{PP}) = 2.5$ V	2.9	0.40	0.03			
$V_n$	Equivalent input noise voltage	$f = 1$ kHz, $R_S = 20 \Omega$		25	32	68	nV/ $\sqrt{\text{Hz}}$		
$B_{OM}$	Maximum output swing bandwidth	$V_O = V_{OH}$ , $C_L = 20$ pF, $R_L = 10$ k $\Omega$		320	55	4.5	kHz		
$B_1$	Unity-gain bandwidth	$V_I = 10$ mV, $C_L = 20$ pF		1700	525	65	kHz		
$\phi_m$	Phase margin	$f = B_1$ , $C_L = 20$ pF	$V_I = 10$ mV,	46°	40°	34°			

† For high-bias mode,  $R_L = 10$  k $\Omega$ ; for medium-bias mode,  $R_L = 100$  k $\Omega$ ; and for low-bias mode,  $R_L = 1$  M $\Omega$ .

### PARAMETER MEASUREMENT INFORMATION

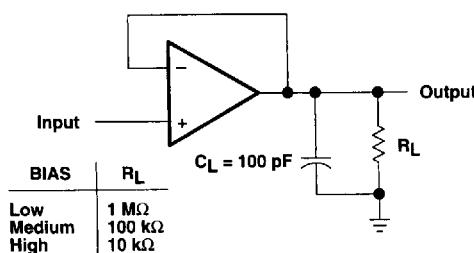


Figure 1. Unity-Gain Amplifier

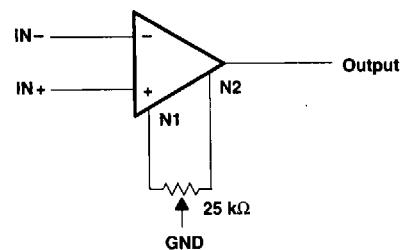


Figure 2. Input Offset Voltage Null Circuit

### TYPICAL CHARACTERISTICS

Table of Graphs

			FIGURE
$I_{DD}$	Supply current	vs Bias-select voltage vs Supply voltage vs Free-air temperature	3 4 5
$A_{VD}$	Large-signal differential voltage amplification	Low bias vs Frequency	6
		Medium bias vs Frequency	7
		High bias vs Frequency	8
	Phase shift	Low bias vs Frequency	6
		Medium bias vs Frequency	7
		High bias vs Frequency	8

8961724 0106433 129

 **TEXAS  
 INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**TLC251, TLC251A, TLC251B, TLC251Y**  
**LinCMOS™ PROGRAMMABLE**  
**LOW-POWER OPERATIONAL AMPLIFIERS**

SLOS001E - JULY 1983 - REVISED AUGUST 1994

**TYPICAL CHARACTERISTICS**

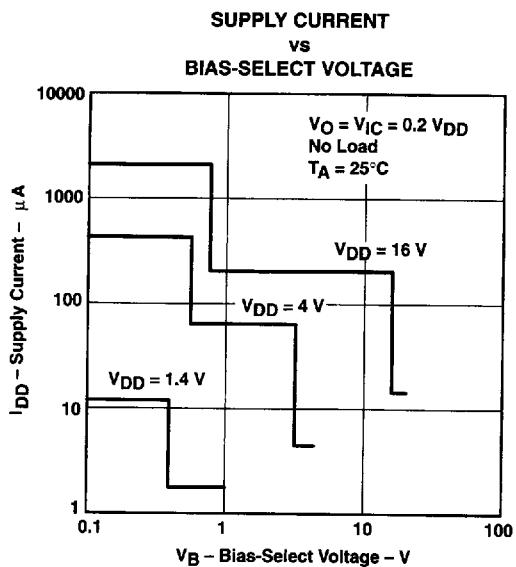


Figure 3

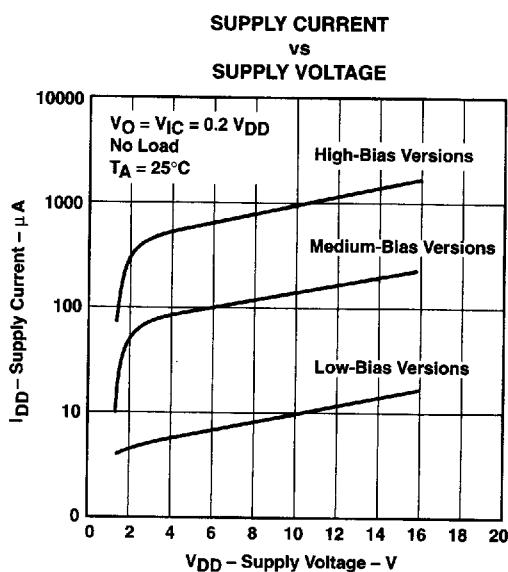


Figure 4


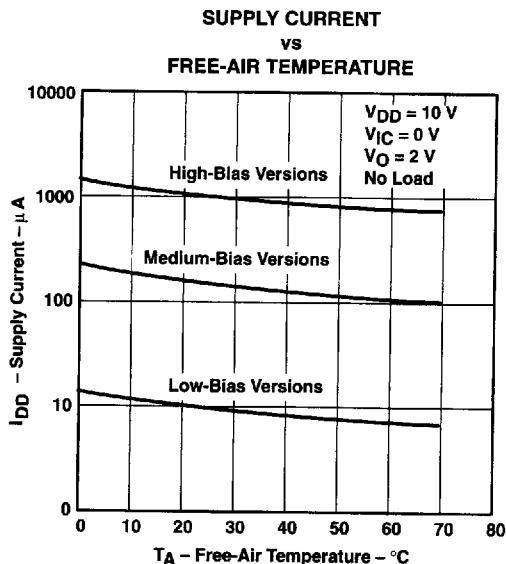



Figure 5

TLC251, TLC251A, TLC251B, TLC251Y  
**LinCMOS™ PROGRAMMABLE  
 LOW-POWER OPERATIONAL AMPLIFIERS**  
 SLOS001E - JULY 1983 - REVISED AUGUST 1994

**TYPICAL CHARACTERISTICS**

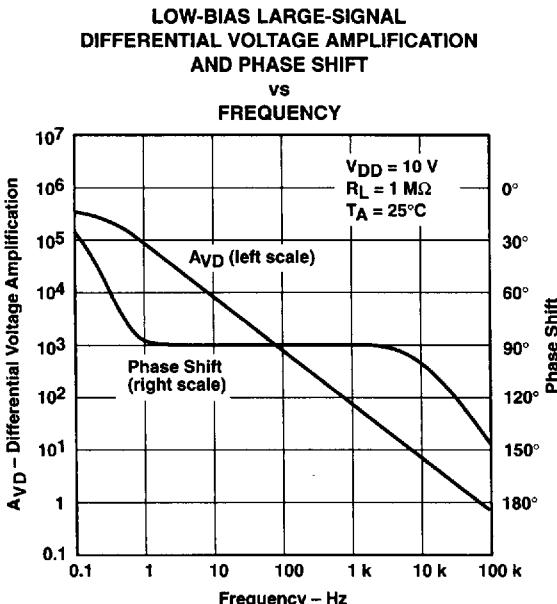

**Figure 6**

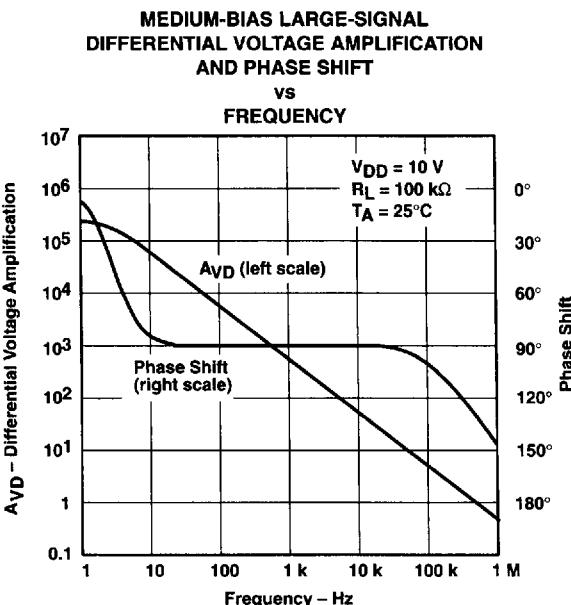

**Figure 7**

■ 8961724 0106435 TTL ■

**TLC251, TLC251A, TLC251B, TLC251Y**  
**LinCMOS™ PROGRAMMABLE**  
**LOW-POWER OPERATIONAL AMPLIFIERS**

SLOS001E - JULY 1983 - REVISED AUGUST 1994

**TYPICAL CHARACTERISTICS**

**HIGH-BIAS LARGE-SIGNAL  
DIFFERENTIAL VOLTAGE AMPLIFICATION  
AND PHASE SHIFT**

VS  
FREQUENCY

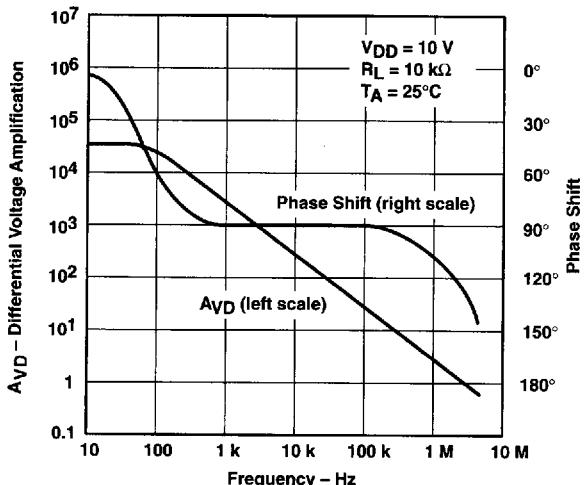


Figure 8

---

**APPLICATION INFORMATION**

**latch-up avoidance**

Junction-isolated CMOS circuits have an inherent parasitic PNPN structure that can function as an SCR. Under certain conditions, this SCR may be triggered into a low-impedance state, resulting in excessive supply current. To avoid such conditions, no voltage greater than 0.3 V beyond the supply rails should be applied to any pin. In general, the operational amplifier supplies should be applied simultaneously with, or before, application of any input signals.

■ 8961724 0106436 938 ■



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**TLC251, TLC251A, TLC251B, TLC251Y**  
**LinCMOS™ PROGRAMMABLE**  
**LOW-POWER OPERATIONAL AMPLIFIERS**

SLOS001E – JULY 1983 – REVISED AUGUST 1994

## APPLICATION INFORMATION

### using BIAS SELECT

The TLC251 has a terminal called BIAS SELECT that allows the selection of one of three  $I_{DD}$  conditions (10, 150, and 1000  $\mu A$  typical). This allows the user to trade-off power and ac performance. As shown in the typical supply current ( $I_{DD}$ ) versus supply voltage ( $V_{DD}$ ) curves (Figure 4), the  $I_{DD}$  varies only slightly from 4 V to 16 V. Below 4 V, the  $I_{DD}$  varies more significantly. Note that the  $I_{DD}$  values in the medium- and low-bias modes at  $V_{DD} = 1.4$  V are typically 2  $\mu A$ , and in the high mode are typically 12  $\mu A$ . The following table shows the recommended BIAS SELECT connections at  $V_{DD} = 10$  V.

BIAS MODE	AC PERFORMANCE	BIAS SELECT CONNECTION†	TYPICAL $I_{DD}^{\ddagger}$
Low	Low	$V_{DD}$	10 $\mu A$
Medium	Medium	0.8 V to 9.2 V	150 $\mu A$
High	High	Ground pin	1000 $\mu A$

† Bias selection may also be controlled by external circuitry to conserve power, etc.  
For information regarding BIAS SELECT, see Figure 3 in the typical characteristics curves.

‡ For  $I_{DD}$  characteristics at voltages other than 10 V, see Figure 4 in the typical characteristics curves.

### output stage considerations

The amplifier's output stage consists of a source-follower-connected pullup transistor and an open-drain pulldown transistor. The high-level output voltage ( $V_{OH}$ ) is virtually independent of the  $I_{DD}$  selection and increases with higher values of  $V_{DD}$  and reduced output loading. The low-level output voltage ( $V_{OL}$ ) decreases with reduced output current and higher input common-mode voltage. With no load,  $V_{OL}$  is essentially equal to the potential of  $V_{DD\_}/GND$ .

### input offset nulling

The TLC251C series offers external offset null control. Nulling may be achieved by adjusting a 25-k $\Omega$  potentiometer connected between the offset null terminals with the wiper connected to the device  $V_{DD\_}/GND$  pin as shown in Figure 2. The amount of nulling range varies with the bias selection. At an  $I_{DD}$  setting of 1000  $\mu A$  (high bias), the nulling range allows the maximum offset specified to be trimmed to zero. In low or medium bias or when the amplifier is used below 4 V, total nulling may not be possible for all units.

### supply configurations

Even though the TLC251C series is characterized for single-supply operation, it can be used effectively in a split-supply configuration when the input common-mode voltage ( $V_{ICR}$ ), output swing ( $V_{OL}$  and  $V_{OH}$ ), and supply voltage limits are not exceeded.

### circuit layout precautions

The user is cautioned that whenever extremely high circuit impedances are used, care must be exercised in layout, construction, board cleanliness, and supply filtering to avoid hum and noise pickup, as well as excessive dc leakages.

8961724 0106437 874



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265