

DATA SHEET

74LV4052
Dual 4-channel analog
multiplexer/demultiplexer

Product specification
Supersedes data of 1997 Jul 15
IC24 Data Handbook

1998 Jun 23

Dual 4-channel analog multiplexer/demultiplexer

74LV4052

FEATURES

- Optimized for low voltage applications: 1.0 to 6.0 V
- Accepts TTL input levels between $V_{CC} = 2.7$ V and $V_{CC} = 3.6$ V
- Low typ "ON" resistance:
60 Ω at $V_{CC} - V_{EE} = 4.5$ V
90 Ω at $V_{CC} - V_{EE} = 3.0$ V
145 Ω at $V_{CC} - V_{EE} = 2.0$ V
- Logic level translation: to enable 3 V logic to communicate with ± 3 V analog signals
- Typical "break before make" built in
- Analog/Digital multiplexing and demultiplexing
- Signal gating
- Output capability: non-standard
- I_{CC} category: MSI

QUICK REFERENCE DATA

 $GND = 0$ V; $T_{amb} = 25^\circ\text{C}$; $t_r = t_f \leq 2.5$ ns

SYMBOL	PARAMETER	CONDITIONS	TYPICAL	UNIT
t_{PHH}/t_{PLZ}	Turn "ON" time \bar{E} or $V_{GS} S_n$	$C_L = 15$ pF $R_L = 1K\Omega$ $V_{CC} = 3.3$ V	30	ns
t_{PLH}/t_{PLZ}	Turn "OFF" time \bar{E} or $V_{GS} S_n$		22	
C_I	Input capacitance	See Notes 1 and 2	3.5	pF
C_{PD}	Power dissipation capacitance per switch		57	
C_S	Maximum switch capacitance independent (Y) common (Z)		5 12	


NOTES:

- C_{PD} is used to determine the dynamic power dissipation (P_D in μW)
 $P_D = C_{PD} \times V_{CC}^2 \times f_i + \sum ((C_L + C_S) \times V_{CC}^2 \times f_o)$ where:
 f_i = input frequency in MHz; C_L = output load capacity in pF;
 f_o = output frequency in MHz; C_S = maximum switch capacitance in pF;
 V_{CC} = supply voltage in V;
 $\sum ((C_L + C_S) \times V_{CC}^2 \times f_o)$ = sum of the outputs.
- The condition is $V_I = GND$ to V_{CC} .

ORDERING INFORMATION

PACKAGES	TEMPERATURE RANGE	OUTSIDE NORTH AMERICA	NORTH AMERICA	Code
16-Pin Plastic DIL	-40°C to +125°C	74LV4052 N	74LV4052 N	SOT38-4
16-Pin Plastic SO	-40°C to +125°C	74LV4052 D	74LV4052 D	SOT109-1
16-Pin Plastic SSOP Type II	-40°C to +125°C	74LV4052 DB	74LV4052 DB	SOT338-1
16-Pin Plastic TSSOP Type I	-40°C to +125°C	74LV4052 PW	74LV4052PW DH	SOT403-1

PIN CONFIGURATION

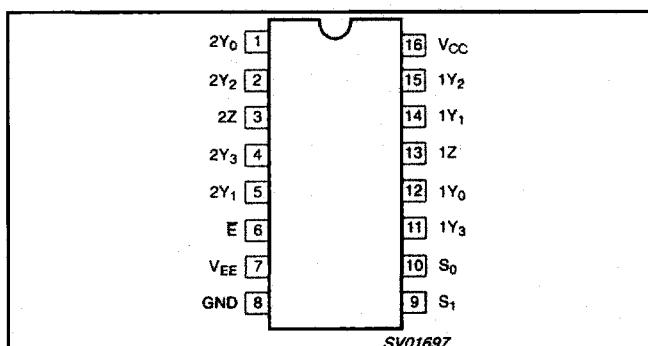


PIN DESCRIPTION

PIN NUMBER	SYMBOL	FUNCTION
1, 5, 2, 4	2Y ₀ , 2Y ₃	Independent inputs/outputs
6	E	Enable input (active LOW)
7	V _{EE}	Negative supply voltage
8	GND	Ground (0 V)
10, 9	S ₀ , S ₁	Select inputs
12, 14, 15, 11	1Y ₀ to 1Y ₃	Independent inputs/outputs
13, 3	1Z, 2Z	Common inputs/outputs
16	V _{CC}	Positive supply voltage


Dual 4-channel analog multiplexer/demultiplexer

74LV4052

LOGIC SYMBOL

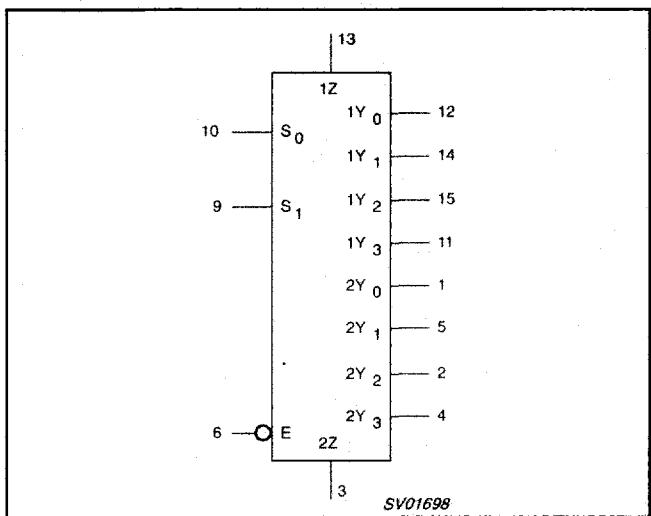

LOGIC SYMBOL (IEEE/IEC)

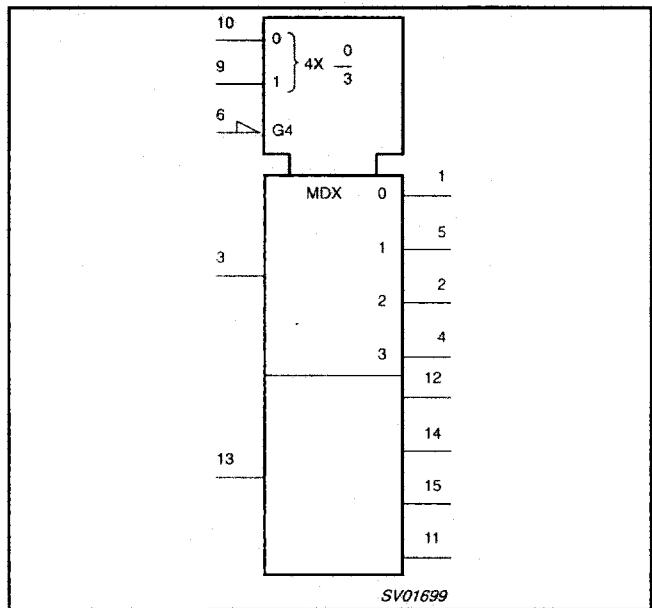

FUNCTION TABLE

INPUTS			CHANNEL ON
E	S ₁	S ₀	
L	L	L	nY ₀ - nZ
L	L	H	nY ₁ - nZ
L	H	L	nY ₂ - nZ
L	H	H	nY ₃ - nZ
H	X	X	None


NOTES:

1. H = HIGH voltage level
2. L = LOW voltage level
3. X = don't care


Dual 4-channel analog multiplexer/demultiplexer

74LV4052

FUNCTIONAL DIAGRAM

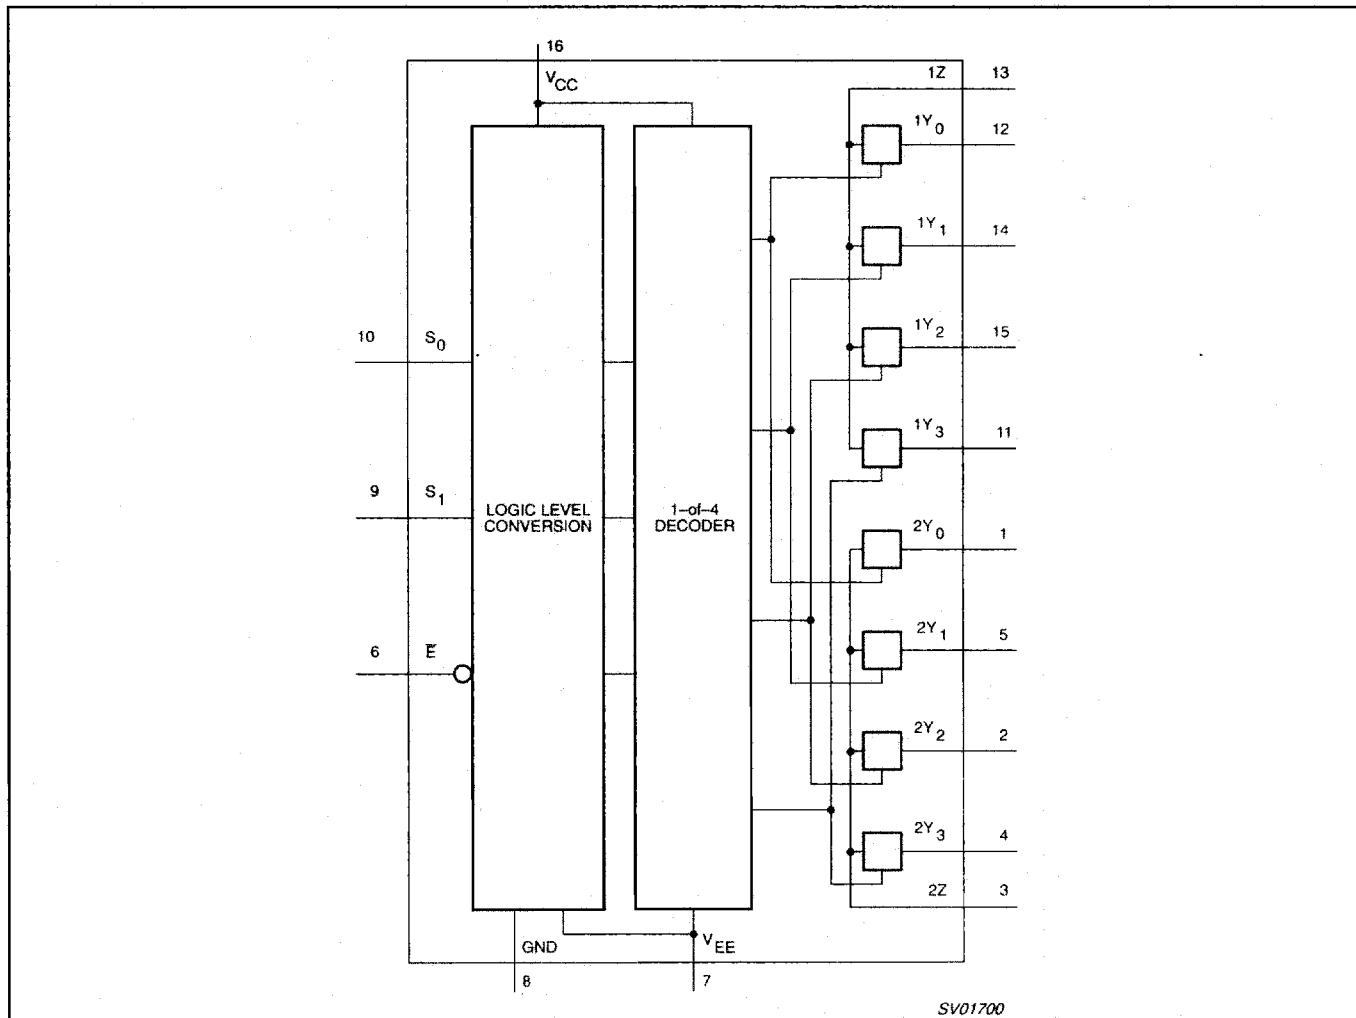

SCHEMATIC DIAGRAM (ONE SWITCH)

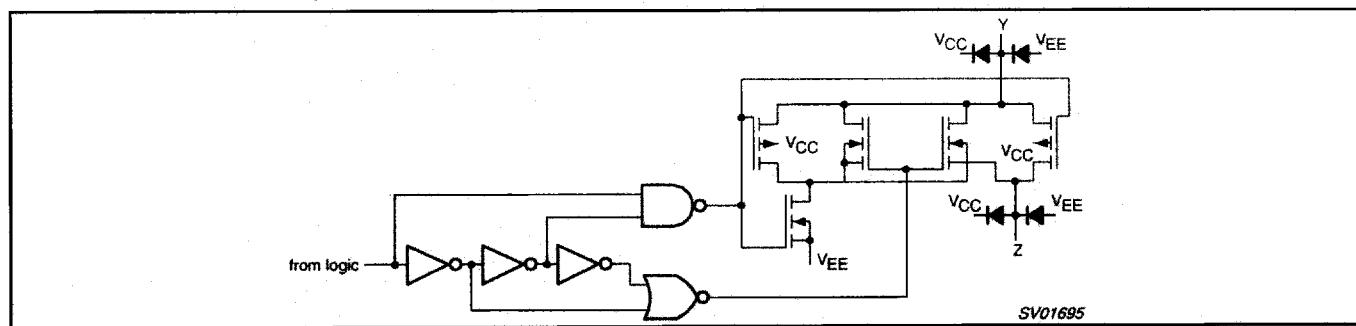

Dual 4-channel analog multiplexer/demultiplexer

74LV4052

ABSOLUTE MAXIMUM RATINGS^{1,2}

In accordance with the Absolute Maximum Rating System (IEC 134).
Voltages are referenced to GND (ground = 0 V).

SYMBOL	PARAMETER	CONDITIONS	RATING	UNIT
V _{CC}	DC supply voltage		-0.5 to +7.0	V
±I _{IK}	DC input diode current	V _I < -0.5 or V _I > V _{CC} + 0.5 V	20	mA
±I _{SK}	DC switch diode current	V _S < -0.5 or V _S > V _{CC} + 0.5 V	20	mA
±I _S	DC switch current	-0.5 V < V _S < V _{CC} + 0.5 V	25	mA
T _{stg}	Storage temperature range		-65 to +150	°C
P _{TOT}	Power dissipation per package – plastic DIL – plastic mini-pack (SO) – plastic shrink mini-pack (SSOP and TSSOP)	for temperature range: -40 to +125°C above +70°C derate linearly with 12 mW/K above +70°C derate linearly with 8 mW/K above +60°C derate linearly with 5.5 mW/K	750 500 400	mW

NOTES:

1. Stresses beyond those listed may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
2. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

RECOMMENDED OPERATING CONDITIONS

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
V _{CC}	DC supply voltage	See Note 1 and Figure 5	1.0	3.3	6.0	V
V _I	Input voltage		0	–	V _{CC}	V
V _O	Output voltage		0	–	V _{CC}	V
T _{amb}	Operating ambient temperature range in free air	See DC and AC characteristics	-40 -40		+85 +125	°C
t _r , t _f	Input rise and fall times	V _{CC} = 1.0 V to 2.0 V V _{CC} = 2.0 V to 2.7 V V _{CC} = 2.7 V to 6.0 V	– – –	– – –	500 200 100	ns/V

NOTE:

1. The LV is guaranteed to function down to V_{CC} = 1.0V (input levels GND or V_{CC}); DC characteristics are guaranteed from V_{CC} = 1.2V to V_{CC} = 6.0V.

Dual 4-channel analog multiplexer/demultiplexer

74LV4052

DC ELECTRICAL CHARACTERISTICS

Over recommended operating conditions, voltages are referenced to GND (ground = 0 V)

SYMBOL	PARAMETER	TEST CONDITIONS	LIMITS					UNIT				
			-40°C to +85°C		-40°C to +125°C		MIN	TYP ¹	MAX	MIN	MAX	UNIT
			MIN	TYP ¹	MIN	MAX						
V_{IH}	HIGH level Input voltage	$V_{CC} = 1.2\text{ V}$	0.9			0.9						V
		$V_{CC} = 2.0\text{ V}$	1.4			1.4						
		$V_{CC} = 2.7\text{ to }3.6\text{ V}$	2.0			2.0						
		$V_{CC} = 4.5\text{ V}$	3.15			3.15						
		$V_{CC} = 6.0\text{ V}$	4.20			4.20						
V_{IL}	LOW level Input voltage	$V_{CC} = 1.2\text{ V}$			0.3		0.3					V
		$V_{CC} = 2.0\text{ V}$			0.6		0.6					
		$V_{CC} = 2.7\text{ to }3.6\text{ V}$			0.8		0.8					
		$V_{CC} = 4.5\text{ V}$			1.35		1.35					
		$V_{CC} = 6.0\text{ V}$			1.80		1.80					
$\pm I_l$	Input leakage current	$V_{CC} = 3.6$	$V_I = V_{CC}$ or GND		1.0		1.0					μA
		$V_{CC} = 6.0$			2.0		2.0					
$\pm I_S$	Analog switch OFF-state current per channel	$V_{CC} = 3.6$	$V_I = V_{IH}$ or V_{IL} $I_{VS} = V_{CC}$ - GND (See Figure 2)		1.0		1.0					μA
		$V_{CC} = 6.0$			2.0		2.0					
$\pm I_S$	Analog switch ON-state current	$V_{CC} = 3.6$	$V_I = V_{IH}$ or V_{IL} $I_{VS} = V_{CC}$ - GND (See Figure 3)		1.0		1.0					μA
		$V_{CC} = 6.0$			2.0		2.0					
I_{CC}	Quiescent supply current	$V_{CC} = 3.6\text{ V}$	$V_I = V_{CC}$ or GND; $V_{IS} = \text{GND}$ or V_{CC} ; $V_{OS} = V_{CC}$ or GND		20.0		40					μA
		$V_{CC} = 6.0\text{ V}$			40.0		80					
ΔI_{CC}	Additional quiescent supply current per input	$V_{CC} = 2.7\text{ to }3.6\text{ V}$	$V_I = V_{CC} - 0.6\text{ V}$			500		850				μA
R_{ON}	ON-resistance (peak)	$V_{CC} = 1.2\text{ V}$	$V_I = V_{IH}$ or V_{IL} ; $I_S = 100\text{ }\mu\text{A}$; $V_{IS} = V_{CC}$ to GND									Ω
		$V_{CC} = 2.0\text{ V}$			145	325		375				
		$V_{CC} = 2.7\text{ V}$			90	200		235				
		$V_{CC} = 3.0\text{ to }3.6\text{ V}$			80	180		210				
		$V_{CC} = 4.5\text{ V}$			60	135		160				
		$V_{CC} = 6.0\text{ V}$			55	125		145				
R_{ON}	ON-resistance (rail)	$V_{CC} = 1.2\text{ V}$	$V_I = V_{IH}$ or V_{IL} ; $I_S = 100\text{ }\mu\text{A}$; $V_{IS} = \text{GND}$		225							Ω
		$V_{CC} = 2.0\text{ V}$			110	235		270				
		$V_{CC} = 2.7\text{ V}$			70	145		165				
		$V_{CC} = 3.0\text{ to }3.6\text{ V}$			60	130		150				
		$V_{CC} = 4.5\text{ V}$			45	100		115				
		$V_{CC} = 6.0\text{ V}$			40	85		100				

NOTES:

- All typical values are measured at $T_{amb} = 25^\circ\text{C}$.
- At supply voltages approaching 1.2 V, the analog switch ON-resistance becomes extremely non-linear. Therefore, it is recommended that these devices be used to transmit digital signals only, when using these supply voltages.
- R_{ON} (MAX) data is preliminary.

Dual 4-channel analog multiplexer/demultiplexer

74LV4052

DC ELECTRICAL CHARACTERISTICS (Continued)

SYMBOL	PARAMETER	TEST CONDITIONS	LIMITS					UNIT	
			-40°C to +85°C			-40°C to +125°C			
			MIN	TYP ¹	MAX	MIN	MAX		
R_{ON}	ON-resistance (rail)	$V_{CC} = 1.2 \text{ V}$	$V_I = V_{IH} \text{ or } V_{IL}$ $I_S = 100 \mu\text{A}$ $V_{IS} = V_{CC}$	250				Ω	
		$V_{CC} = 2.0 \text{ V}$		120	320		370	Ω	
		$V_{CC} = 2.7 \text{ V}$	$V_I = V_{IH} \text{ or } V_{IL}$ $I_S = 1000 \mu\text{A}$ $V_{IS} = V_{CC}$	75	195		225	Ω	
		$V_{CC} = 3.0 \text{ to } 3.6 \text{ V}$		70	175		205	Ω	
		$V_{CC} = 4.5 \text{ V}$		50	130		150	Ω	
		$V_{CC} = 6.0 \text{ V}$		45	120		135	Ω	
ΔR_{ON}	Maximum variation of ON-resistance between any two channels	$V_{CC} = 1.2 \text{ V}$	$V_I = V_{IH} \text{ or } V_{IL}$ $V_{IS} = V_{CC} \text{ to GND}$					Ω	
		$V_{CC} = 2.0 \text{ V}$			5				
		$V_{CC} = 2.7 \text{ V}$			4				
		$V_{CC} = 3.0 \text{ to } 3.6 \text{ V}$			4				
		$V_{CC} = 4.5 \text{ V}$			3				
		$V_{CC} = 6.0 \text{ V}$			2				

NOTES:

1. All typical values are measured at $T_{amb} = 25^\circ\text{C}$.
2. At supply voltages approaching 1.2 V, the analog switch ON-resistance becomes extremely non-linear. Therefore, it is recommended that these devices be used to transmit digital signals only, when using these supply voltages.
3. R_{ON} (MAX) data is preliminary.

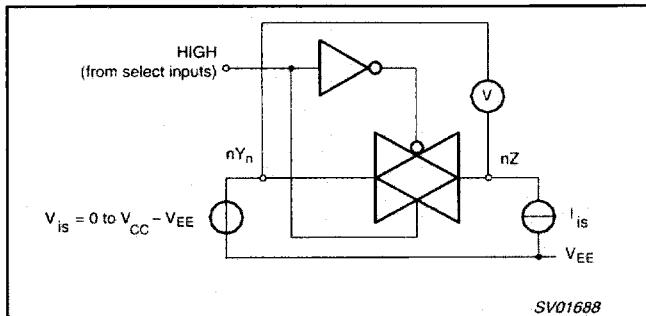
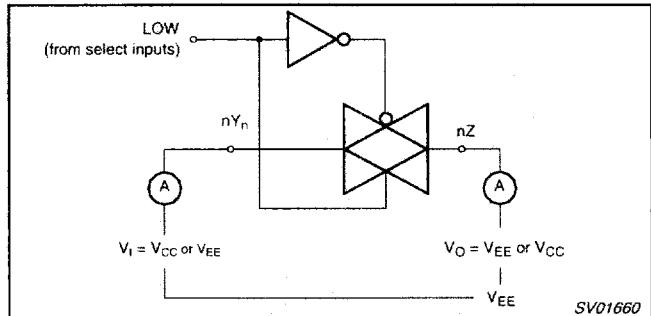
Figure 1. Test circuit for measuring ON-resistance (R_{ON}).

Figure 2. Test circuit for measuring OFF-state current.

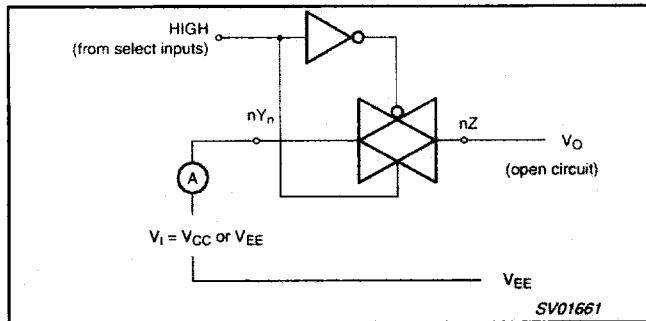
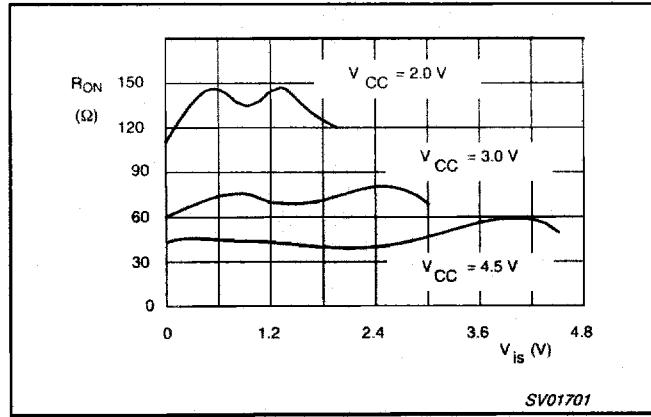


Figure 3. Test circuit for measuring ON-state current.

Figure 4. Typical ON-resistance (R_{on}) as a function of input voltage (V_{is}) for $V_{is} = 0 \text{ to } V_{CC} - V_{EE}$.

Dual 4-channel analog multiplexer/demultiplexer

74LV4052

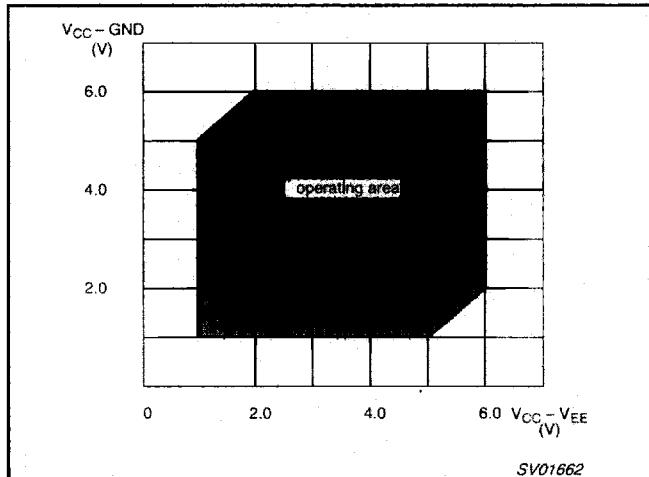


Figure 5. Guaranteed operating area as a function of the supply voltages.

AC CHARACTERISTICS

GND = 0 V; $t_r = t_f \leq 2.5 \text{ ns}$; $C_L = 50 \text{ pF}$

SYMBOL	PARAMETER	CONDITION		LIMITS				UNIT
		V _{CC} (V)	OTHER	MIN	TYP ¹	MAX	MIN	
t_{PHL}/t_{PLH}	Propagation delay V_{IS} to V_{OS}	1.2	$R_L = \infty$; $C_L = 50 \text{ pF}$ Figure 12		25			ns
		2.0		9	17		20	
		2.7		6	13		15	
		3.0 to 3.6		5 ²	10		12	
		4.5		4	9		10	
		6.0		3	7		8	
t_{PZH}/t_{PZL}	Turn-on time E, S_n to V_{OS}	1.2	$R_L = 1\text{k}\Omega$; $C_L = 50 \text{ pF}$ Figures 13 and 1		190			ns
		2.0		65	121		146	
		2.7		48	89		108	
		3.0 to 3.6		36 ²	71		86	
		4.5		32	60		73	
		6.0		25	46		56	
t_{PHZ}/t_{PLZ}	Turn-off time E, S_n to V_{OS}	1.2	$R_L = 1\text{k}\Omega$; $C_L = 50 \text{ pF}$ Figures 13 and 1		125			ns
		2.0		43	80		95	
		2.7		33	59		71	
		3.0 to 3.6		26 ²	48		57	
		4.5		23	41		49	
		6.0		18	32		38	

NOTES:

- Unless otherwise stated, all typical values are measured at $T_{amb} = 25^\circ\text{C}$
- Typical values are measured at $V_{CC} = 3.3 \text{ V}$.

Dual 4-channel analog multiplexer/demultiplexer

74LV4052

ADDITIONAL AC CHARACTERISTICS

Recommended conditions and typical values

GND = 0 V; $t_r = t_f \leq 2.5\text{ns}$

SYMBOL	PARAMETER	TYP.	UNIT	V_{CC} (V)	$V_{IS(p-p)}$ (V)	CONDITIONS
	Sine-wave distortion $f = 1\text{ kHz}$	0.80 0.40	%	3.0 6.0	2.75 5.50	$R_L = 10\text{ k}\Omega$; $C_L = 50\text{ pF}$ Figure 9 and 10
	Sine-wave distortion $f = 10\text{ kHz}$	2.40 1.20	%	3.0 6.0	2.75 5.50	$R_L = 10\text{ k}\Omega$; $C_L = 50\text{ pF}$ Figure 9 and 10
	Switch "OFF" signal feed through	-50 -50	dB	3.0 6.0	Note 1	$R_L = 600\text{ }\Omega$; $C_L = 50\text{ pF}$; $f = 1\text{ MHz}$ Figures 5 and 11
	Crosstalk between any two switches/multiplexers	-60 -60	dB	3.0 6.0	Note 1	$R_L = 600\text{ }\Omega$; $C_L = 50\text{ pF}$; $f = 1\text{ MHz}$ Figure 8
$V_{(p-p)}$	Crosstalk voltage between enable or address input to any switch (peak-to-peak value)	110 120	mV	3.0 6.0		$R_L = 600\text{ }\Omega$; $C_L = 50\text{ pF}$; $f = 1\text{ MHz}$ (S_n or E , square wave between V_{CC} and GND $t_r = t_f = 6\text{ ns}$) Figure 8
f_{max}	Minimum frequency response (-3 dB)	180 200	MHz	3.0 6.0	Note 2	$R_L = 50\text{ }\Omega$; $C_L = 50\text{ pF}$ Figures 6, 8 and 9
C_S	Maximum switch capacitance	5	pf			

GENERAL NOTES:

1. V_{IS} is the input voltage at nY or nZ terminal, whichever is assigned as an input.
2. V_{OS} is the output voltage at nY or nZ terminal, whichever is assigned as an output.

NOTES:

1. Adjust input voltage V_{IS} is 0 dBm level (0 dBm = 1 mW into $600\text{ }\Omega$).
2. Adjust input voltage V_{IS} is 0 dBm level at V_{OS} for 1 MHz (0 dBm = 1 mW into $50\text{ }\Omega$).

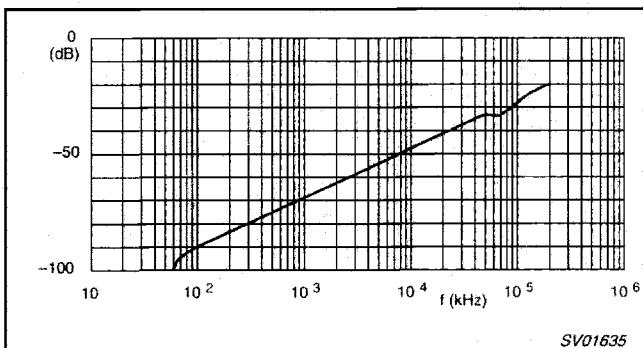


Figure 6. Typical switch "OFF" signal feed-through as a function of frequency.

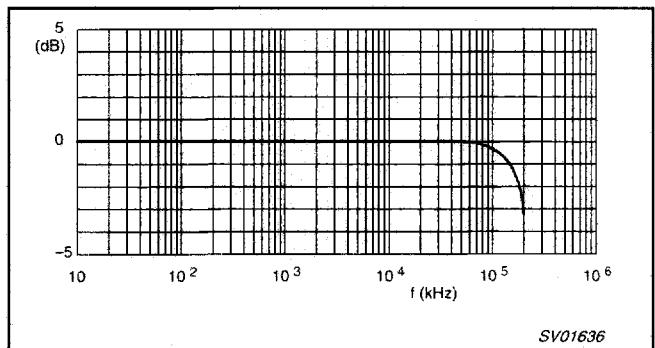
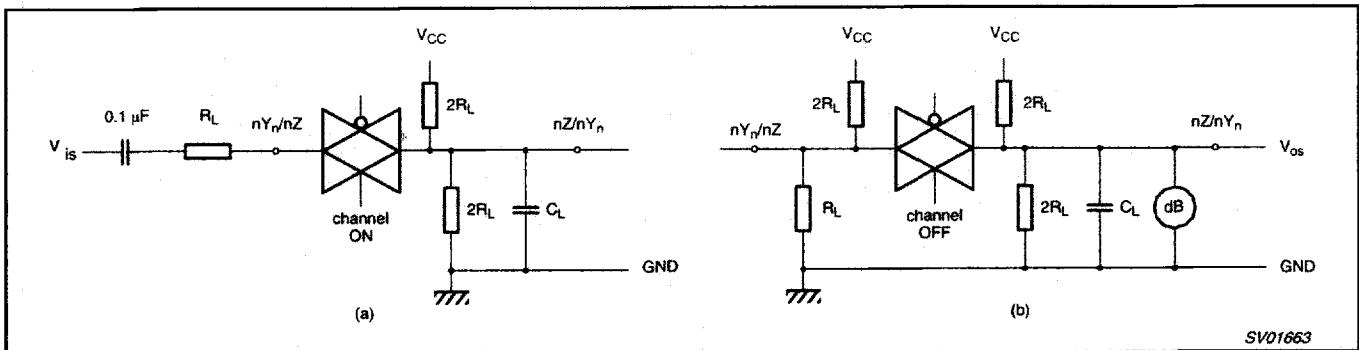


Figure 7. Typical frequency response.

NOTES TO FIGURES 6 AND 7:

Test conditions: $V_{CC} = 3.0\text{ V}$; GND = 0 V; $V_{EE} = -3.0\text{ V}$; $R_L = 50\text{ }\Omega$; $R_{SOURCE} = 1\text{k}\Omega$.Figure 8. Test circuit for measuring crosstalk between any two switches.
(a) channel ON condition; (b) channel OFF condition.

Dual 4-channel analog multiplexer/demultiplexer

74LV4052

NOTE TO FIGURE 8:

The crosstalk is defined as follows (oscilloscope output):

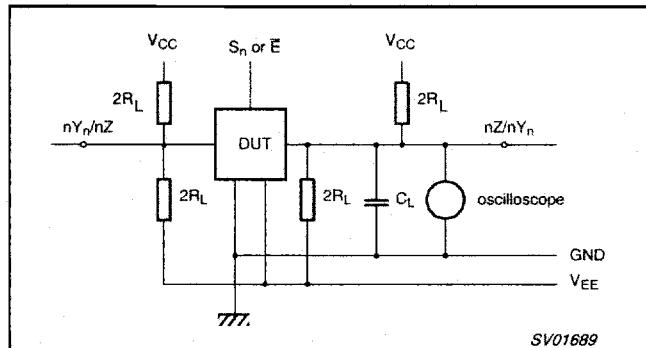
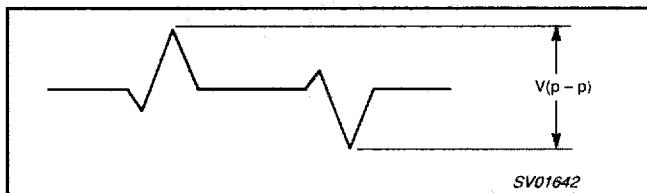


Figure 9. Test circuit for measuring crosstalk between control and any switch.

NOTE TO FIGURE 9:

Adjust input voltage to obtain 0 dBm at V_{OS} when $f_{in} = 1 \text{ MHz}$. After set-up frequency of f_{in} is increased to obtain a reading of -3 dB at V_{OS} .

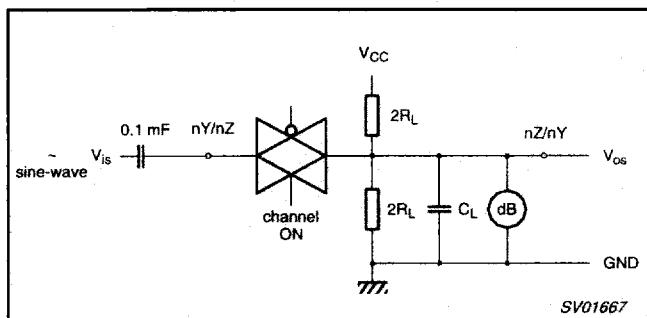


Figure 10. Test circuit for measuring minimum frequency response.

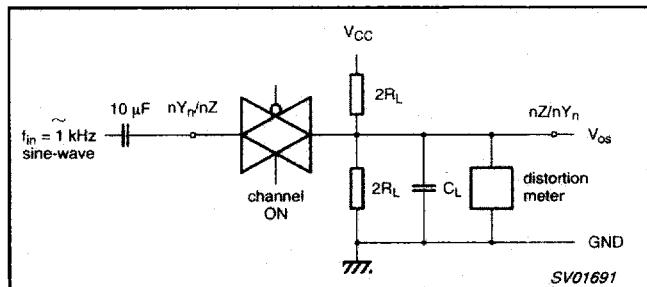


Figure 11. Test circuit for measuring sine-wave distortion.

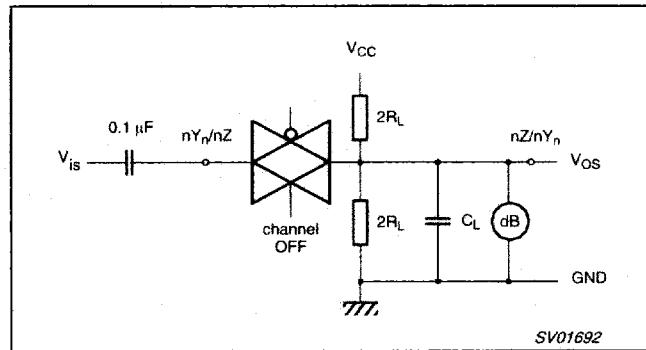


Figure 12. Test circuit for measuring switch "OFF" signal feed-through.



Dual 4-channel analog multiplexer/demultiplexer

74LV4052

WAVEFORMS

NOTES:

1. $V_M = 1.5 \text{ V}$ at $2.7 \text{ V} \leq V_{CC} \leq 3.6 \text{ V}$
 $V_M = 0.5 \times V_{CC}$ at $2.7 \text{ V} > V_{CC} > 3.6 \text{ V}$
2. V_{OL} and V_{OH} are the typical output voltage drop that occur with the output load
3. $V_X = V_{OL} + 0.3 \text{ V}$ at $2.7 \text{ V} \leq V_{CC} \leq 3.6 \text{ V}$
 $V_X = V_{OL} + 0.1 \times V_{CC}$ at $2.7 \text{ V} > V_{CC} > 3.6 \text{ V}$
 $V_Y = V_{OH} - 0.3 \text{ V}$ at $2.7 \text{ V} \leq V_{CC} \leq 3.6 \text{ V}$
 $V_Y = V_{OH} - 0.1 \times V_{CC}$ at $2.7 \text{ V} > V_{CC} > 3.6 \text{ V}$

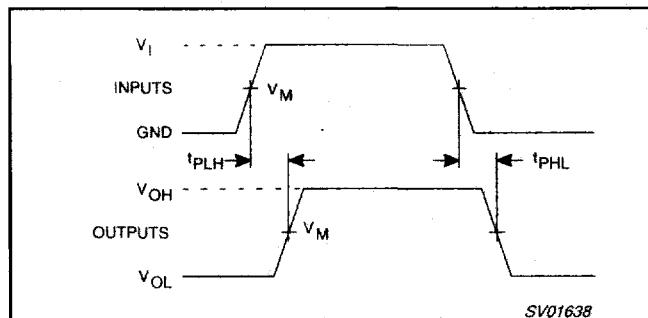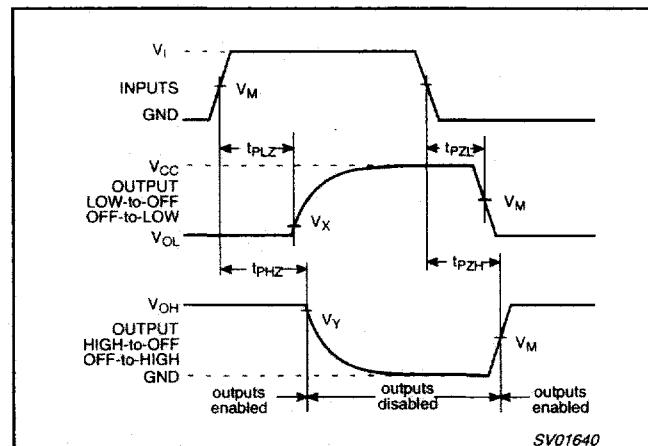Figure 13. Input (V_I) to output (V_{Os}) propagation delays.Figure 14. Turn-on and turn-off times for the inputs (S_n, E) to the output (V_{Os}).

TEST CIRCUIT

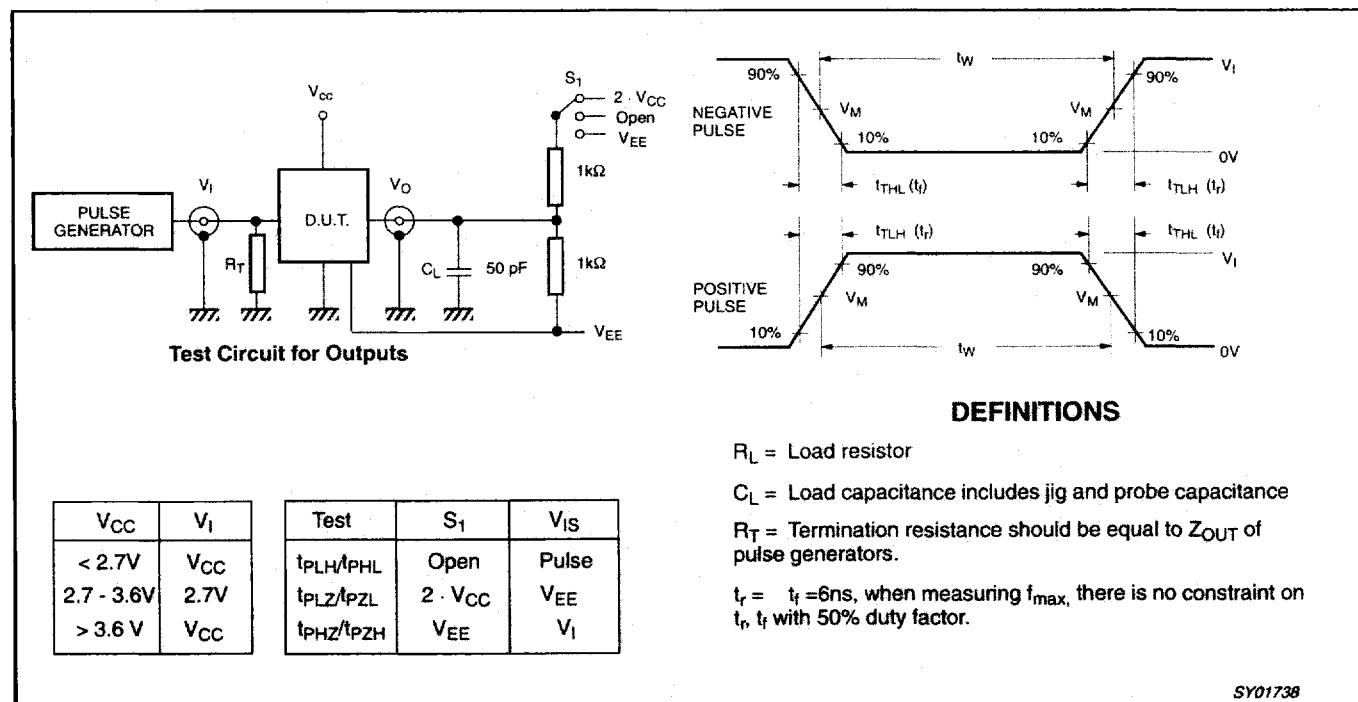



Figure 15. Load circuitry for switching times.

Dual 4-channel analog multiplexer/demultiplexer

74LV4052

DIP16: plastic dual in-line package; 16 leads (300 mil)

SOT38-4

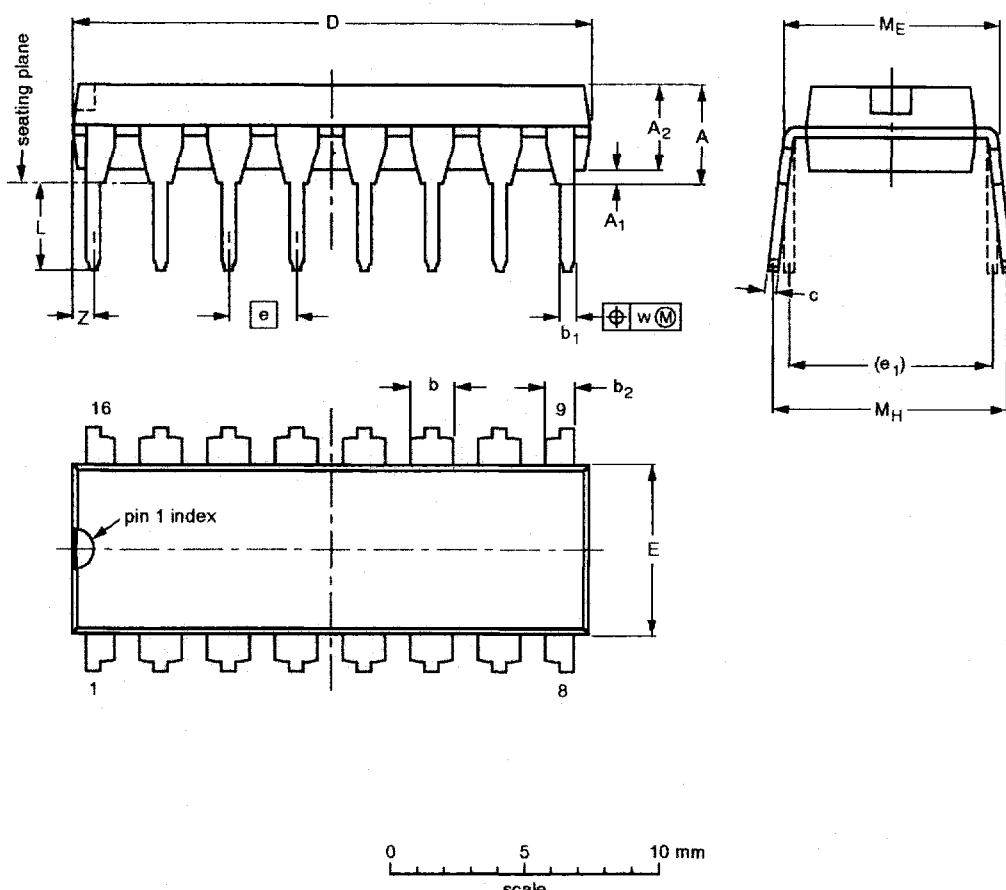

DIMENSIONS (inch dimensions are derived from the original mm dimensions)

UNIT	A max.	A ₁ min.	A ₂ max.	b	b ₁	b ₂	c	D ⁽¹⁾	E ⁽¹⁾	e	e ₁	L	M _E	M _H	w	Z ⁽¹⁾ max.
mm	4.2	0.51	3.2	1.73 1.30	0.53 0.38	1.25 0.85	0.36 0.23	19.50 18.55	6.48 6.20	2.54	7.62	3.60 3.05	8.25 7.80	10.0 8.3	0.254	0.76
inches	0.17	0.020	0.13	0.068 0.051	0.021 0.015	0.049 0.033	0.014 0.009	0.77 0.73	0.26 0.24	0.10	0.30	0.14 0.12	0.32 0.31	0.39 0.33	0.01	0.030

Note

- Plastic or metal protrusions of 0.25 mm maximum per side are not included.


OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT38-4						92-11-17 95-01-14

Dual 4-channel analog multiplexer/demultiplexer

74LV4052

SO16: plastic small outline package; 16 leads; body width 3.9 mm

SOT109-1

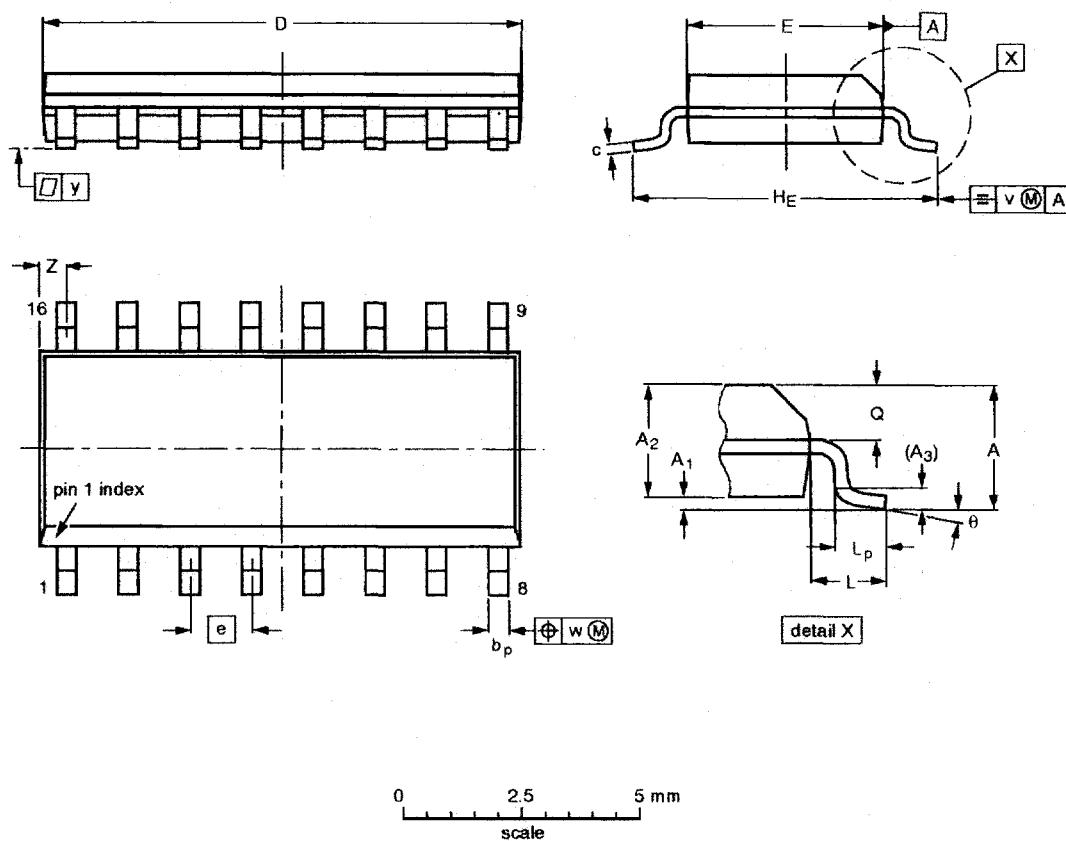

DIMENSIONS (inch dimensions are derived from the original mm dimensions)

UNIT	A max.	A ₁	A ₂	A ₃	b _p	c	D ⁽¹⁾	E ⁽¹⁾	e	H _E	L	L _p	Q	v	w	y	z ⁽¹⁾	θ
mm	1.75 0.10	0.25 1.25	1.45 0.25	0.25	0.49 0.36	0.25 0.19	10.0 9.8	4.0 3.8	1.27	6.2 5.8	1.05	1.0 0.4	0.7 0.6	0.25	0.25	0.1	0.7 0.3	8° 0°
inches	0.069 0.0039	0.0098 0.0049	0.057 0.049	0.01	0.019 0.014	0.0098 0.0075	0.39 0.38	0.16 0.15	0.050	0.24 0.23	0.041	0.039 0.016	0.028 0.020	0.01	0.01	0.004	0.028 0.012	

Note

- Plastic or metal protrusions of 0.15 mm maximum per side are not included.


OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT109-1	076E07S	MS-012AC				94-08-10- 95-01-23

Dual 4-channel analog multiplexer/demultiplexer

74LV4052

SSOP16: plastic shrink small outline package; 16 leads; body width 5.3 mm

SOT338-1

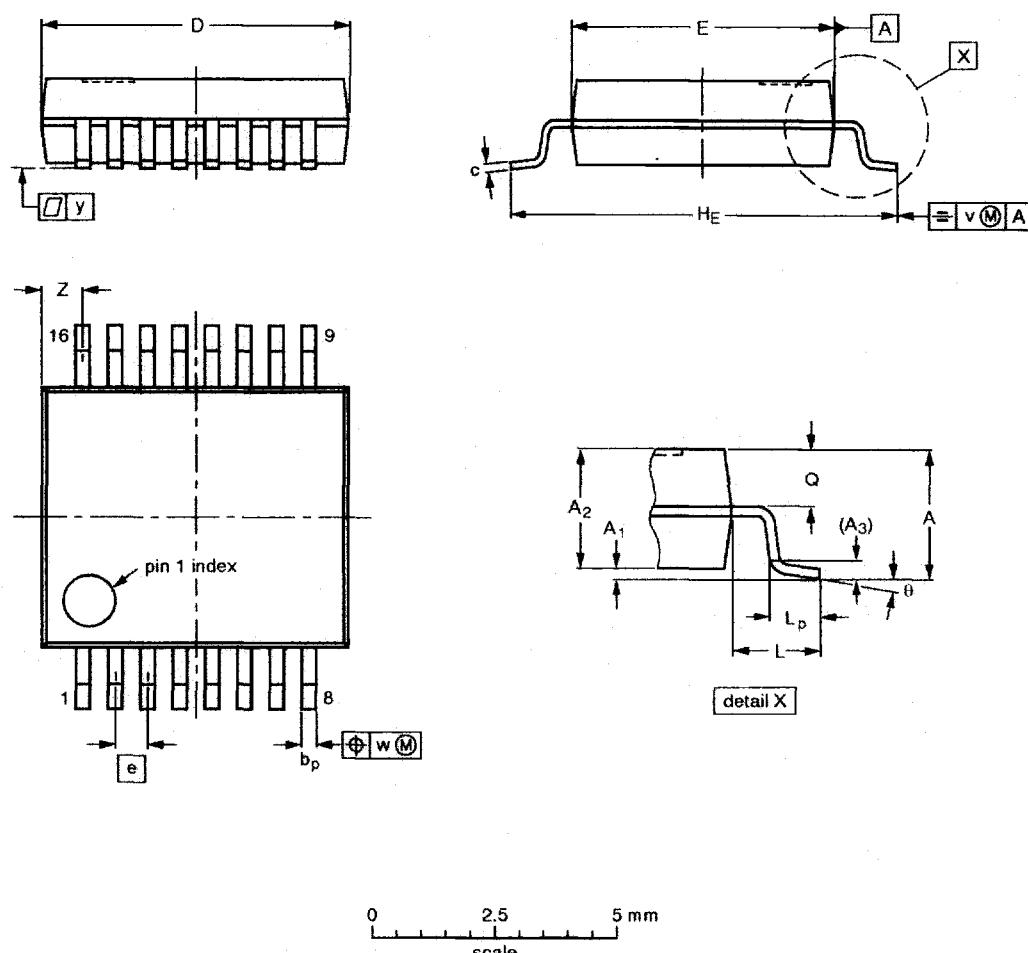

DIMENSIONS (mm are the original dimensions)

UNIT	A max.	A ₁	A ₂	A ₃	b _p	c	D ⁽¹⁾	E ⁽¹⁾	e	H _E	L	L _p	Q	v	w	y	Z ⁽¹⁾	θ
mm	2.0 0.05	0.21 1.65	1.80	0.25	0.38 0.25	0.20 0.09	6.4 6.0	5.4 5.2	0.65	7.9 7.6	1.25	1.03 0.63	0.9 0.7	0.2	0.13	0.1	1.00 0.55	8° 0°

Note

1. Plastic or metal protrusions of 0.25 mm maximum per side are not included.


OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT338-1		MO-150AC				94-01-14 95-02-04

Dual 4-channel analog multiplexer/demultiplexer

74LV4052

TSSOP16: plastic thin shrink small outline package; 16 leads; body width 4.4 mm

SOT403-1

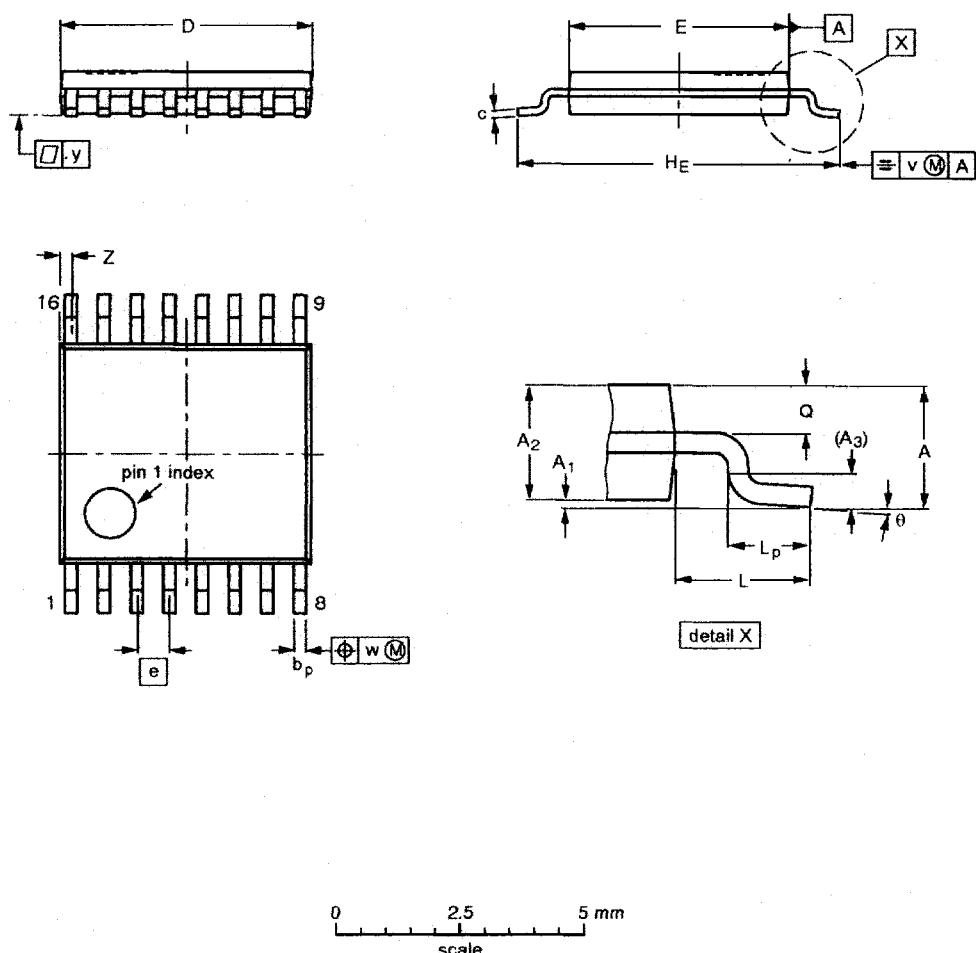

DIMENSIONS (mm are the original dimensions)

UNIT	A max.	A ₁	A ₂	A ₃	b _p	c	D ⁽¹⁾	E ⁽²⁾	e	H _E	L	L _p	Q	v	w	y	Z ⁽¹⁾	θ
mm	1.10 0.05	0.15 0.05	0.95 0.80	0.25	0.30 0.19	0.2 0.1	5.1 4.9	4.5 4.3	0.65	6.6 6.2	1.0	0.75 0.50	0.4 0.3	0.2	0.13	0.1	0.40 0.06	8° 0°

Notes

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.
2. Plastic interlead protrusions of 0.25 mm maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT403-1		MO-153				-94-07-12 95-04-04

Dual 4-channel analog multiplexer/demultiplexer

74LV4052

DEFINITIONS

Data Sheet Identification	Product Status	Definition
<i>Objective Specification</i>	Formative or In Design	This data sheet contains the design target or goal specifications for product development. Specifications may change in any manner without notice.
<i>Preliminary Specification</i>	Preproduction Product	This data sheet contains preliminary data, and supplementary data will be published at a later date. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
<i>Product Specification</i>	Full Production	This data sheet contains Final Specifications. Philips Semiconductors reserves the right to make changes at any time without notice, in order to improve design and supply the best possible product.

Philips Semiconductors and Philips Electronics North America Corporation reserve the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified. Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

LIFE SUPPORT APPLICATIONS

Philips Semiconductors and Philips Electronics North America Corporation Products are not designed for use in life support appliances, devices, or systems where malfunction of a Philips Semiconductors and Philips Electronics North America Corporation Product can reasonably be expected to result in a personal injury. Philips Semiconductors and Philips Electronics North America Corporation customers using or selling Philips Semiconductors and Philips Electronics North America Corporation Products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors and Philips Electronics North America Corporation for any damages resulting from such improper use or sale.

Philips Semiconductors
811 East Arques Avenue
P.O. Box 3409
Sunnyvale, California 94088-3409
Telephone 800-234-7381

© Copyright Philips Electronics North America Corporation 1998
All rights reserved. Printed in U.S.A.

print code

Date of release: 05-96

Document order number:

9397-750-04461

Let's make things better.

Philips
Semiconductors

yyyy mmm dd



PHILIPS