




## FAST RECOVERY RECTIFIER DIODES

### FEATURES

- VERY LOW REVERSE RECOVERY TIME
- VERY LOW SWITCHING LOSSES
- LOW NOISE TURN-OFF SWITCHING
- INSULATED PACKAGE :  
Insulating voltage = 2500 V<sub>RMS</sub>  
Capacitance = 45 pF


**BYT231PI(V)-800**

**BYT230PI(V)-800**

**ISOTOP ®**

(Plastic)

Screw version (\*)

### DESCRIPTION

Dual high voltage rectifiers ranging from 600V to 800V suited for Switch Mode Power Supplies and other power converters.

The devices are packaged in ISOTOP.

### ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter			Value	Unit
I <sub>FRM</sub>	Repetitive peak forward current			tp ≤ 10μs	375
I <sub>F(RMS)</sub>	RMS forward current			Per diode	70
I <sub>F(AV)</sub>	Average forward current	T <sub>c</sub> =55°C δ = 0.5	Per diode	30	A
I <sub>FSM</sub>	Surge non repetitive forward current	tp=10ms sinusoidal	Per diode	200	A
T <sub>stg</sub> T <sub>j</sub>	Storage and junction temperature range			- 40 to + 150 - 40 to + 150	°C °C

Symbol	Parameter	BYT230PI(V)- / BYT231PI(V)-		Unit
		600	800	
V <sub>RRM</sub>	Repetitive peak reverse voltage	600	800	V

\* : Tin plated Fast-on version is also available (without V suffix).

TM : ISOTOP is a trademark of SGS-THOMSON Microelectronics.

# BYT230PI(V)-800 / BYT231PI(V)-800

## THERMAL RESISTANCE

Symbol	Parameter	Value	Unit
R <sub>th</sub> (j-c)	Junction to case	Per diode	1.5
		Total	0.8
R <sub>th</sub> (c)	Coupling	0.1	°C/W

When the diodes 1 and 2 are used simultaneously :  
 $\Delta T_j(\text{diode 1}) = P(\text{diode}) \times R_{th}(\text{Per diode}) + P(\text{diode 2}) \times R_{th}(c)$

## ELECTRICAL CHARACTERISTICS (Per diode)

### STATIC CHARACTERISTICS

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
V <sub>F</sub> *	T <sub>j</sub> = 25°C	I <sub>F</sub> = 30 A			1.9	V
	T <sub>j</sub> = 100°C				1.8	
I <sub>R</sub> **	T <sub>j</sub> = 25°C	V <sub>R</sub> = V <sub>RRM</sub>			100	μA
	T <sub>j</sub> = 100°C				5	

Pulse test : \* tp = 380 μs, duty cycle < 2 %

\*\* tp = 5 ms, duty cycle < 2 %

### RECOVERY CHARACTERISTICS

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
trr	T <sub>j</sub> = 25°C	I <sub>F</sub> = 0.5A	I <sub>rr</sub> = 0.25A		55	ns
		I <sub>R</sub> = 1A			130	
		I <sub>F</sub> = 1A V <sub>R</sub> = 30V	dI <sub>F</sub> /dt = -15A/μs			

### TURN-OFF SWITCHING CHARACTERISTICS (Without serie inductance)

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
t <sub>IRM</sub>	dI <sub>F</sub> /dt = -120A/μs	V <sub>CC</sub> = 200V L <sub>p</sub> ≤ 0.05μH see fig. 11	I <sub>F</sub> = 30A T <sub>j</sub> = 100°C		160	ns
	dI <sub>F</sub> /dt = -240A/μs			100		
I <sub>RM</sub>	dI <sub>F</sub> /dt = -120A/μs				15	A
	dI <sub>F</sub> /dt = -240A/μs			19		


### TURN-OFF OVERVOLTAGE COEFFICIENT (With serie inductance)

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
C = $\frac{V_{RP}}{V_{CC}}$	T <sub>j</sub> = 100°C dI <sub>F</sub> /dt = -30A/μs	V <sub>CC</sub> = 150V L <sub>p</sub> = 4μH see fig. 12	I <sub>F</sub> = I <sub>F(AV)</sub>		4	/


To evaluate the conduction losses use the following equation :

$$P = 1.47 \times I_{F(AV)} + 0.010 \times I_F^2 (\text{RMS})$$


**Fig.1** : Low frequency power losses versus average current.

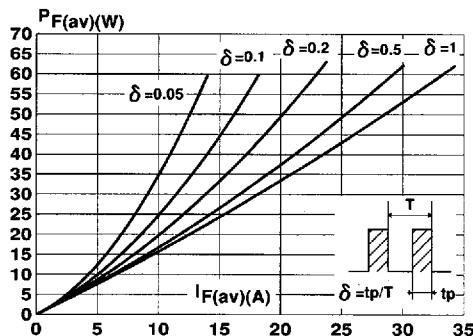


**Fig.3** : Non repetitive peak surge current versus overload duration.

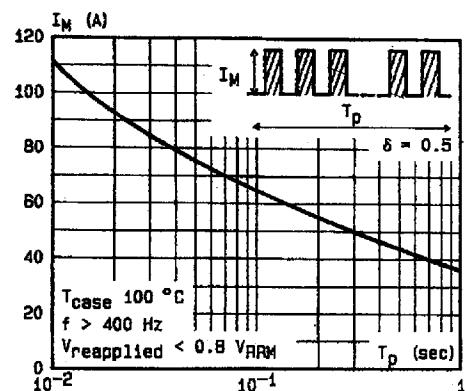


**Fig.5** : Voltage drop versus forward current.

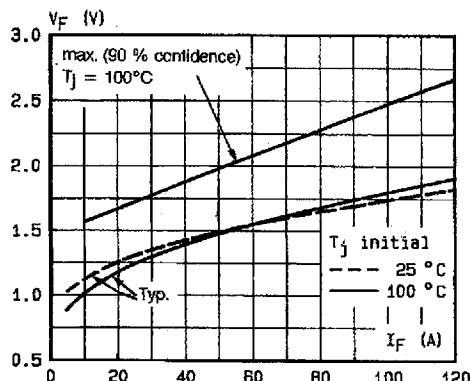


**Fig.2** : Peak current versus form factor.

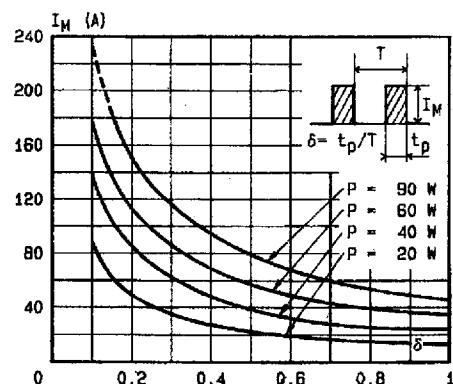

**Fig.4** : Relative variation of thermal impedance junction to case versus pulse duration.

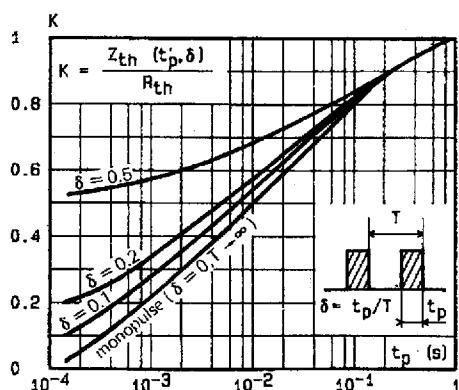


**Fig.6** : Recovery charge versus di/dt.

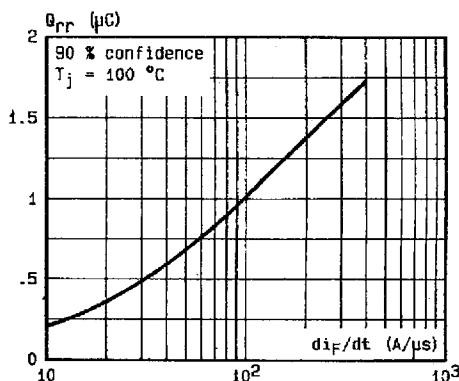


■ 7929237 0060326 T15 ■


**Fig.7 : Recovery time versus dI<sub>F</sub>/dt.**

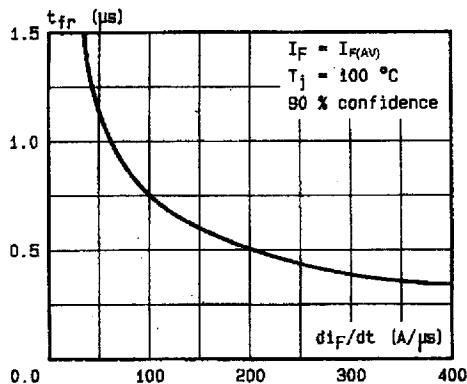


**Fig.9 : Peak forward voltage versus dI<sub>F</sub>/dt.**

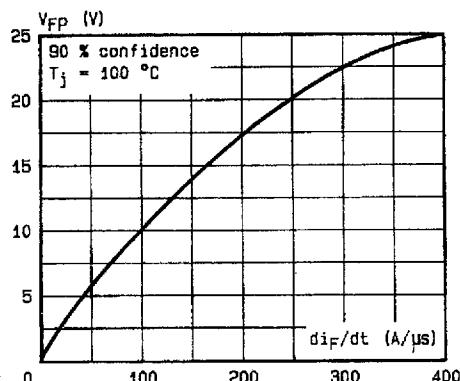


**Fig.11 : TURN-OFF SWITCHING CHARACTERISTICS (Without serie inductance)**

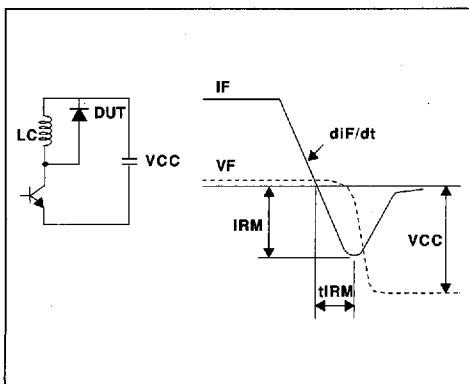

**Fig.8 : Peak reverse current versus dI<sub>F</sub>/dt.**

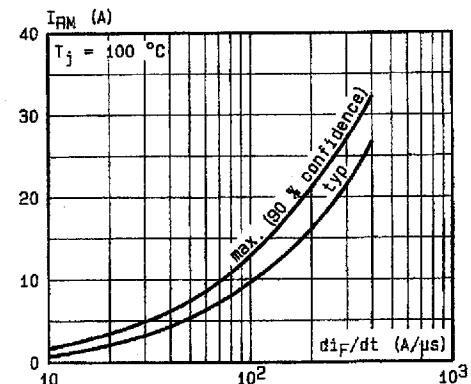

**Fig.10 : Dynamic parameters versus junction temperature.**

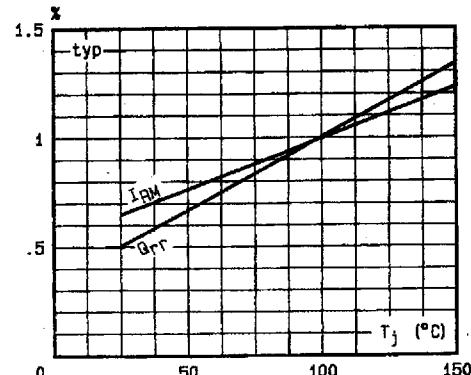

**Fig.12 : TURN-OFF SWITCHING CHARACTERISTICS (With serie inductance)**

