

**PRELIMINARY**  
 Notice : This is not a final specification  
 Some parametric limits are subject to change.

MITSUBISHI SEMICONDUCTOR <GaAs FET>

# MGFC45V5053A

5.05~5.25GHz BAND 32W INTERNALLY MATCHED GaAs FET

## DESCRIPTION

The MGFC45V5053A is an internally impedance matched GaAs power FET especially designed for use in 5.05~5.25 GHz band amplifiers. The hermetically sealed metal-ceramic package guarantees high reliability.

## FEATURES (TARGET)

- Internally matched to 50 ( $\Omega$ ) system
- High output power  
 $P_{1dB}=32W$  (TYP.) @ $f=5.05\sim 5.25GHz$
- High power gain  
 $GLP=10.0dB$  (TYP.) @ $f=5.05\sim 5.25GHz$
- High power added efficiency  
 $P.A.E.=33%$  (TYP.) @ $f=5.05\sim 5.25GHz$
- Low distortion [item -51]  
 $IM3=-45dBc$  (TYP.) @ $P_o=34.5dBm$  S.C.L.

## APPLICATION

5.05~5.25GHz band amplifiers

## QUALITY GRADE

- IG

## RECOMMENDED BIAS CONDITIONS

- $V_{DS}=10V$
- $I_D=8A$
- $R_G=25\Omega$  Refer to Bias Procedure

## ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Ratings	Unit
$V_{GDO}$	Gate to drain voltage	-15	V
$V_{GSO}$	Gate to source voltage	-15	V
$I_D$	Drain current	20	A
$I_{GR}$	Reverse gate current	-80	mA
$I_{GF}$	Forward gate current	168	mA
$P_T$	Total power dissipation *1	150	W
$T_{ch}$	Channel temperature	175	$^{\circ}C$
$T_{stg}$	Storage temperature	-65 ~ +175	$^{\circ}C$

\*1 :  $T_c=25^{\circ}C$

## ELECTRICAL CHARACTERISTICS


Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max	
$I_{DSS}$	Saturated drain current	$V_{DS}=3V, I_{GS}=0V$	—	24	—	V
$G_m$	Transconductance	$V_{DS}=3V, I_D=8V$	—	8	—	S
$V_{GS}(\text{off})$	Gate to Source cut-off voltage	$V_{DS}=3V, I_D=160mA$	-2	—	-5	V
$P_{1dB}$	Output power at 1dB gain compression	$V_{DS}=10V, I_D=8A, f=5.05\sim 5.25GHz$	44	45	—	dBm
$GLP$	Linear power gain		9	9.5	—	dB
$P.A.E.$	Power added efficiency		—	34	—	%
$IM3$ *2	3rd order IM distortion		-42	-45	—	dBc
$R_{th}(\text{ch-c})$	Thermal resistance *1	$\Delta V_i$ method	—	0.8	1.0	$^{\circ}C/W$

\*1 : Channel to case

\*2 : Item-51, 2tone test,  $P_o=34.5dBm$  Single Carrier Level,  $f=5.05, 5.15, 5.25GHz$ ,  $\Delta f=5MHz$

## OUTLINE DRAWING

Until : millimeters (inches)

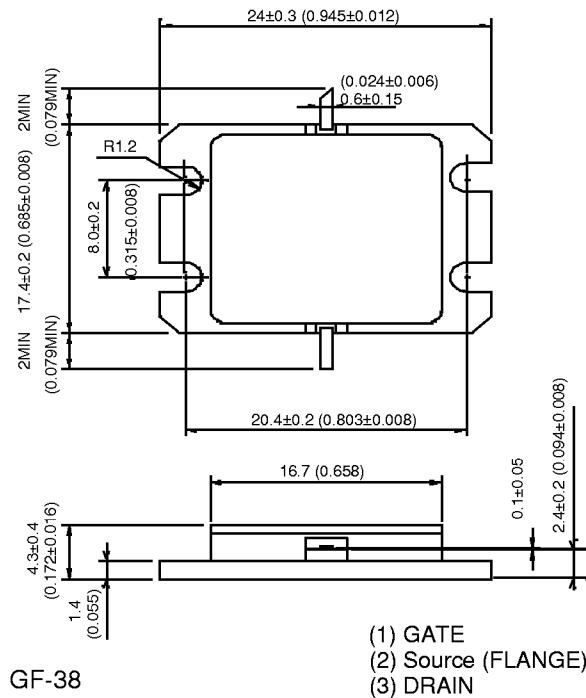

< Keep safety first in your circuit designs! >

Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.