

PI5C3306C
4-Bit BusSwitch with
-2V Undershoot Protection

Product Features

- R_{ON} is 5ohm typical
- Undershoot protection on A port nly: -2V
- Industrial Operation Temperature: -40°C to +85°C
- Near zero propagation delay
- Low Channel ON Capacitance: 14pF max.
- Packages available:
 - 8-pin 173 mil wide plastic TSSOP (L)
 - 8-pin 118 mil wide plastic MSOP (U)

Applications

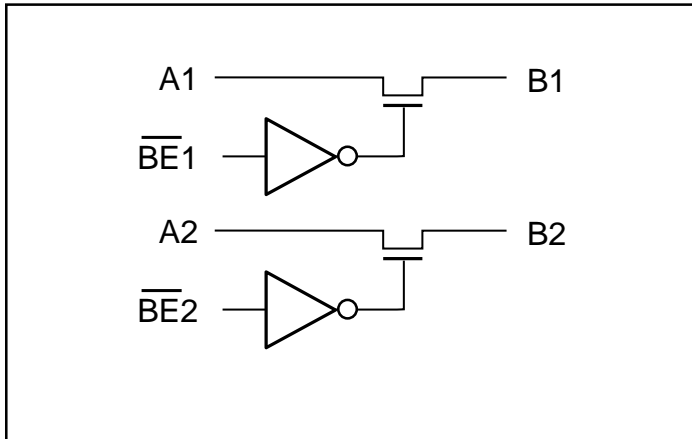
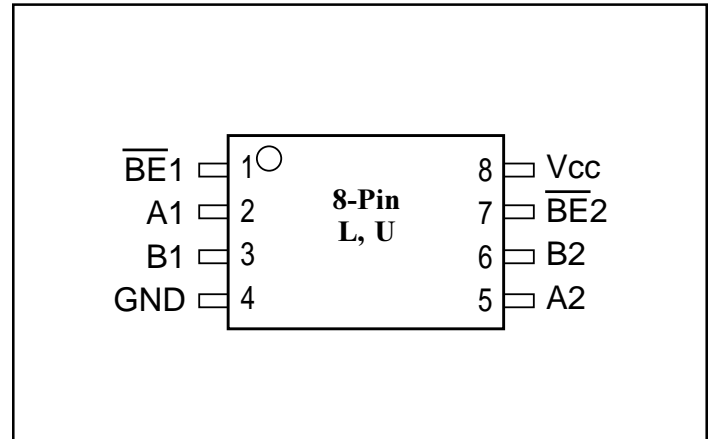
- PCI Hot Plugging for live insertion
- Memory bank sharing

Product Description

Pericom Semiconductor's PI5C series of logic circuits are produced using the Company's advanced submicron CMOS technology, achieving industry leading performance.

The PI5C3306C is a 5V, 2-bit, 2-port bus switch. It is intended for PCI Hot-Plug applications. Industry leading advantages include a propagation delay of 250ps, resulting from its 5-ohm channel resistance and low I/O capacitance. The A-ports switch data to B outputs and are bidirectional. The PI5C3306C device has active LOW enables.

The A-port can handle up to -2V undershoot when the switch is disabled.

Logic Block Diagram

Product Pin Configuration

Product Pin Description

Pin Name	Description
$\overline{BE}n$	Switch Enable
A2-A1	Bus A
B2-B1	Bus B
Vcc	Power
GND	Ground

Truth Table⁽¹⁾

$\overline{BE}n$	A_n	B_n	Vcc	Function
X*	Hi-Z	Hi-Z	GND	Disconnect
H	Hi-Z	Hi-Z	Vcc	Disconnect
L	B_n	A_n	Vcc	Connect

Notes:

1. H = High Voltage Level, L = Low Voltage Level
Hi-Z = High Impedance, X = Don't Care

* A pull-up resistor should be provided for power-up protection.



TARGET SPECIFICATION

PI5C3306C
4-Bit Bus Switch with
-2V Undershoot Protection

Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature	-65°C to +150°C
Ambient Temperature with Power Applied	-40°C to +85°C
Supply Voltage to Ground Potential (Inputs & V _{CC} Only)	-0.5V to +7.0V
Supply Voltage to Ground Potential (Outputs & D/O Only) .	-0.5V to +7.0V
DC Input Voltage	-0.5V to +7.0V
DC Output Current	120mA
Power Dissipation	0.5W

Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

DC Electrical Characteristics (Over the Operating Range, T_A = -40°C to +85°C, V_{CC} = 4V to 5.5V)

Parameters	Description	Test Conditions ⁽¹⁾	Min.	Typ ⁽²⁾	Max.	Units
V _{IH}	Input HIGH Voltage	Guaranteed Logic HIGH Level	2.0			V
V _{IL}	Input LOW Voltage	Guaranteed Logic LOW Level	-0.5		0.8	V
I _{IH}	Input HIGH Current	V _{CC} = Max., V _{IN} = V _{CC}			±1	μA
I _{IL}	Input LOW Current	V _{CC} = Max., V _{IN} = GND			±1	μA
I _{OZH}	High Impedance Output Current	0 ≤ A, B ≤ V _{CC}			±1	μA
V _{IK}	Clamp Diode Voltage	V _{CC} = Min., I _{IN} = -18mA			-1.8	V
V _{UP}	Undershoot Protection Voltage ⁽³⁾	Max Inputs, Undershoot Pulse Duration <25ns			-2.0	V
R _{ON}	Switch On Resistance ⁽⁴⁾	V _{CC} = Min., V _{IN} = 0.0V, I _{ON} = 48mA V _{CC} = Min., V _{IN} = 2.4V, I _{ON} = 15mA		5 10	7 15	ohm

Capacitance (T_A = 25°C, f = 1 MHz)

Parameters ⁽⁴⁾	Description	Test Conditions	Typ	Units
C _{IN}	Input Capacitance	V _{IN} = 0V	6	pF
C _{OFF}	A/B Capacitance, Switch Off	V _{IN} = 0V	6	pF
C _{ON}	A/B Capacitance, Switch On	V _{IN} = 0V	8	pF

Notes:

1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.
2. Typical values are at V_{CC} = 5.0V, T_A = 25°C ambient and maximum loading.
3. On IAN (Data Input) pins only.
4. Measured by the voltage drop between A and B pin at indicated current through the switch. ON resistance is determined by the lower of the voltages on the two (A, B) pins.
5. This parameter is determined by device characterization but is not production tested.

Power Supply Characteristics

Parameters	Description	Test Conditions ⁽¹⁾		Min.	Typ ⁽²⁾	Max.	Units
I _{CC}	Quiescent Power Supply Current	V _{CC} = Max.	V _{IN} = GND or V _{CC}			100	μA
ΔI _{CC}	Supply Current per Input @ TTL HIGH	V _{CC} = Max.	V _{IN} = 3.4V ⁽³⁾			2.5	mA

Notes:

1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device.
2. Typical values are at V_{CC} = 5.0V, +25°C ambient.
3. Per TTL driven input (V_{IN} = 3.4V, control inputs only); A and B pins do not contribute to I_{CC}.
4. This current applies to the control inputs only and represent the current required to switch internal capacitance at the specified frequency. The A and B inputs generate no significant AC or DC currents as they transition. This parameter is not tested, but is guaranteed by design.



PI5C3306C Switching Characteristics over Operating Range

Parameters	Description	Conditions	PI5C3306C		Units
			Com		
			Min.	Max.	
t_{PLH} t_{PHL}	Propagation Delay ^(2,3) A to B, B to A	$C_L = 50\text{pF}$ $R_L = 500\text{ohm}$		0.25	ns
t_{PZH} t_{PZL}	Bus Enable Time		0.5	6.6	
t_{PHZ} t_{PLZ}	Bus Disable Time		0.5	6.0	

Notes:

1. See test circuit and waveforms.
2. This parameter is guaranteed but not tested on Propagation Delays.
3. The bus switch contributes no propagational delay other than the RC delay of the ON resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.25ns for 50pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagational delay to the system. Propagational delay of the bus switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.

Applications Information**Logic Inputs**

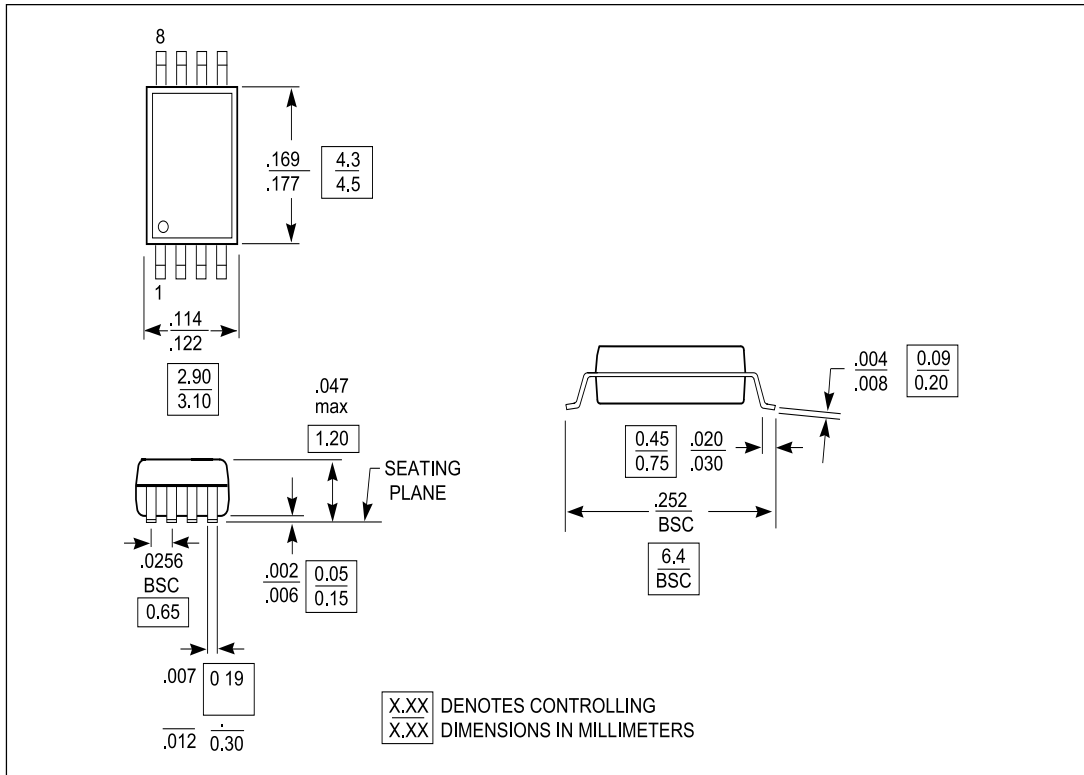
The logic control inputs can be driven up to +5.5V regardless of the supply voltage. For example, given a +5.0V supply, BE, maybe driven LOW to 0V and HIGH to 5.5V. Driving BE Rail-to-Rail[®] minimizes power consumption.

Power-Supply Sequencing

Proper power-supply sequencing is recommended for all CMOS devices. Always apply Vcc before applying signals to the input/output or control pins.

[®]Rail-to-Rail is a registered trademark of Nippon Motorola, Ltd.

8-Pin TSSOP (L)



8-Pin MSOP (U)

