



BC847CPN

DUAL GENERAL PURPOSE TRANSISTORS

NPN/PNP Duals (Complimentary)

These transistors are designed for general purpose amplifier applications. They are housed in the SOT-363 which is designed for low power surface mount applications.

FEATURES

- Š a Á / Á / { } | ^ Á a @ W Á [P Ú Á C E C D Í B Ó Á a ^ & a ^ É Á
^ Á O : ^ ^ } Á [| a a * Á & [] [^ } a Á e Á ^ ! Á D O Í F G J Á Ú a É Á P a [* ^ } Á C ^ A D

MECHANICAL DATA

Case: SOT-363

Terminals : Solderable per MIL-STD-750, Method 2026

Approx Weight: 0.006 grams

Marking : 4C7





Fig.55

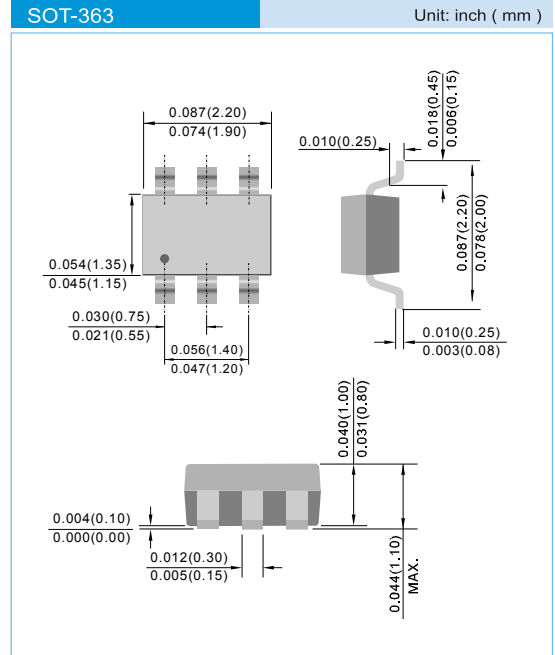

MAXIMUM RATINGS-NPN

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CE0}	45	V
Collector-Base Voltage	V_{CBO}	50	V
Emitter-Base Voltage	V_{EBO}	6.0	V
Collector Current-Continuous	I_c	100	mAdc

MAXIMUM RATINGS-PNP

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CE0}	-45	V
Collector-Base Voltage	V_{CBO}	-50	V
Emitter-Base Voltage	V_{EBO}	-5.0	V
Collector Current-Continuous	I_c	-100	mAdc

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.



BC847CPN

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation Per Device FR-4 Board (Note 1) $T_A=25^{\circ}\text{C}$ Derate above 25°C	P_D	380	mW
		250	
		3.0	mW/ $^{\circ}\text{C}$
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	328	$^{\circ}\text{C}/\text{W}$
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150	$^{\circ}\text{C}$

1.FR-4 = 70 x 60 x 1mm.

ELECTRICAL CHARACTERISTICS (NPN) ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min.	Typ.	Max.	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage $I_C=10\text{mA}$	$V_{(BR)CEO}$	45	-	-	V
Collector-Emitter Breakdown Voltage $I_C=10\mu\text{A}, V_{EB}=0$	$V_{(BR)CES}$	50	-	-	V
Collector-Base Breakdown Voltage $I_C=10\mu\text{A}$	$V_{(BR)CBO}$	50	-	-	V
Emitter-Base Breakdown Voltage $I_E=1.0\mu\text{A}$	$V_{(BR)EBO}$	6.0	-	-	V
Collector Cutoff Current $V_{CB}=30\text{V}$ $V_{CB}=30\text{V}, T_A=150^{\circ}\text{C}$	I_{CBO}	-	-	15 5.0	nA μA
ON CHARACTERISTICS					
DC Current Gain $I_C=10\mu\text{A}, V_{CE}=5.0\text{V}$ $I_C=2.0\text{mA}, V_{CE}=5.0\text{V}$	h_{FE}	- 420	270 520	- 800	-
Collector-Emitter Saturation Voltage $I_C=10\text{mA}, I_B=0.5\text{mA}$ $I_C=100\text{mA}, I_B=5.0\text{mA}$	$V_{CE(sat)}$	- -	- -	0.25 0.6	V
Base-Emitter Saturation Voltage $I_C=10\text{mA}, I_B=0.5\text{mA}$ $I_C=100\text{mA}, I_B=5.0\text{mA}$	$V_{BE(sat)}$	- -	0.7 0.9	- -	V
Base-Emitter Voltage $I_C=2.0\text{mA}, V_{CE}=5.0\text{V}$ $I_C=10\text{mA}, V_{CE}=5.0\text{V}$	$V_{BE(on)}$	580 -	660 -	700 770	mV
SMALL-SIGNAL CHARACTERISTICS					
Current-Gain-Bandwidth Product $I_C=10\text{mA}, V_{CE}=5.0\text{Vdc}, f=100\text{MHz}$	fr	100	-	-	MHz
Output Capacitance ($V_{CB}=10\text{V}, f=1\text{MHz}$)	Cobo	-	-	4.5	pF
Noise Figure $I_C=0.2\text{mA}, V_{CE}=5.0\text{Vdc}, R_S=2.0\text{k}\Omega, f=1.0\text{kHz}, BW=200\text{Hz}$	NF	-	-	10	dB



BC847CPN

ELECTRICAL CHARACTERISTICS (PNP) (T_A=25°C unless otherwise noted)

Characteristic	Symbol	Min.	Typ.	Max.	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage I _C =-10mA	V _{(BR)CEO}	-45	-	-	V
Collector-Emitter Breakdown Voltage I _C =-10μA, V _{EB} =0	V _{(BR)CES}	-50	-	-	V
Collector-Base Breakdown Voltage I _C =-10μA	V _{(BR)CBO}	-50	-	-	V
Emitter-Base Breakdown Voltage I _E =-1.0μA	V _{(BR)EBO}	-5.0	-	-	V
Collector Cutoff Current V _{CB} =-30V V _{CB} =-30V, T _A =150°C	I _{CBO}	-	-	-15 -4.0	nA μA
ON CHARACTERISTICS					
DC Current Gain I _C =-10μA, V _{CE} =-5.0V I _C =-2.0mA, V _{CE} =-5.0V	h _{FE}	- 420	270 520	- 800	-
Collector-Emitter Saturation Voltage I _C =-10mA, I _B =-0.5mA I _C =-100mA, I _B =-5.0mA	V _{CE(sat)}	- -	- -	-0.3 -0.65	V
Base-Emitter Saturation Voltage I _C =-10mA, I _B =-0.5mA I _C =-100mA, I _B =-5.0mA	V _{BE(sat)}	- -	-0.7 -0.9	- -	V
Base-Emitter Voltage I _C =-2.0mA, V _{CE} =-5.0V I _C =-10mA, V _{CE} =-5.0V	V _{BE(on)}	-0.6 -	- -	-0.75 -0.82	mV
SMALL-SIGNAL CHARACTERISTICS					
Current-Gain-Bandwidth Product I _C =-10mA, V _{CE} =-5.0Vdc, f=100MHz	f _T	100	-	-	MHz
Output Capacitance (V _{CB} =-10V, f=1MHz)	C _{obo}	-	-	4.5	pF
Noise Figure I _C =-0.2mA, V _{CE} =-5.0Vdc, R _S =2.0kΩ, 1.0kHz, BW=200Hz	NF	-	-	10	dB



BC847CPN

TYPICAL NPN CHARACTERISTICS

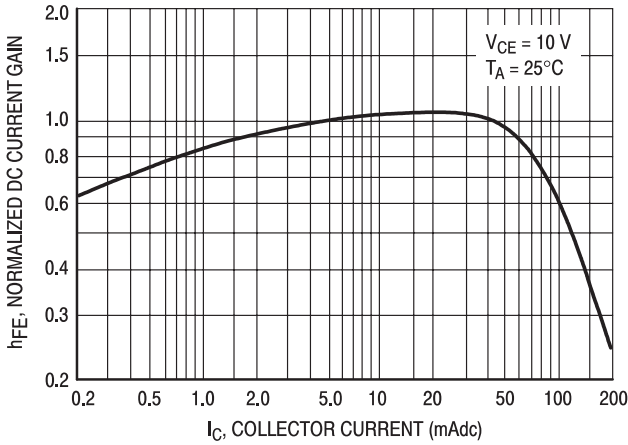


Figure 1 . Normalized DC Current Gain

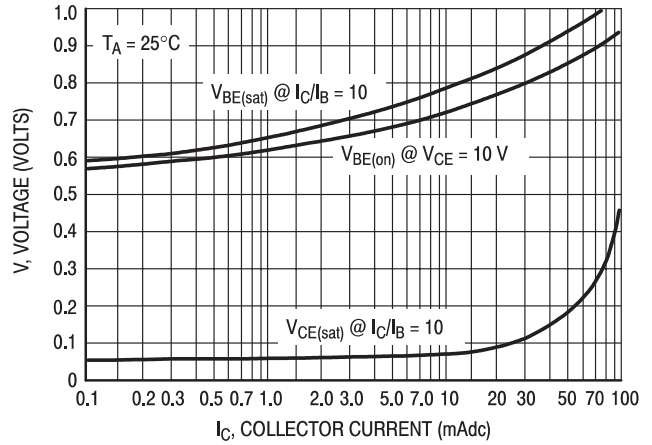


Figure 2 . "Saturation" and "On" Voltages

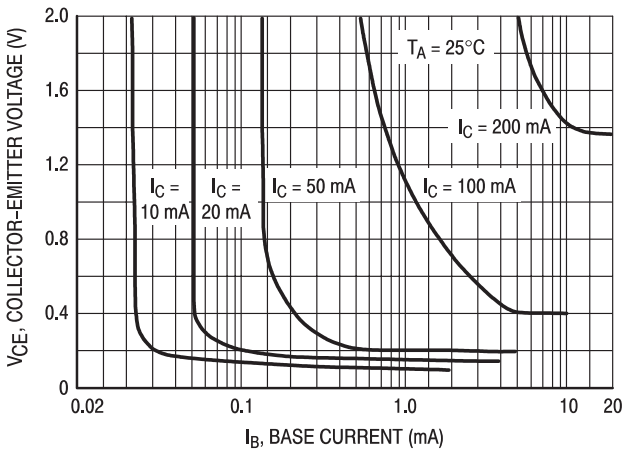


Figure 3 . Collector Saturation Region

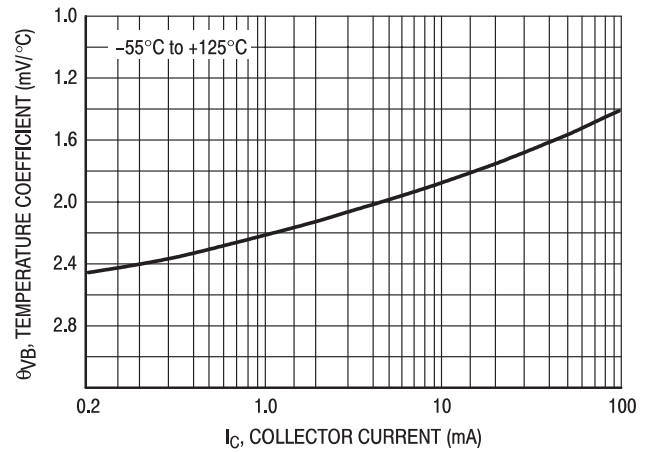


Figure 4 . Base-Emitter Temperature Coefficient

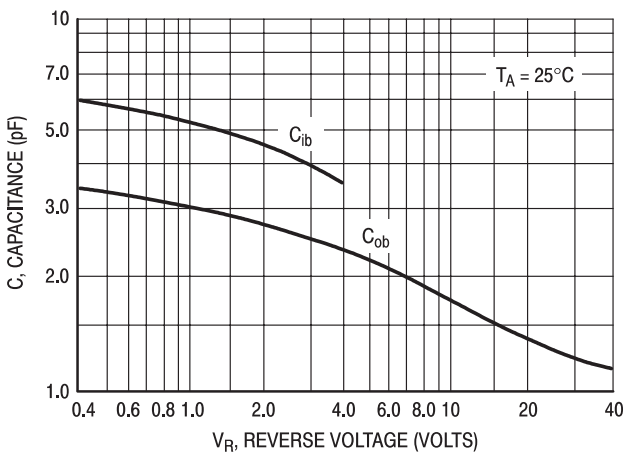


Figure 5 . Capacitances

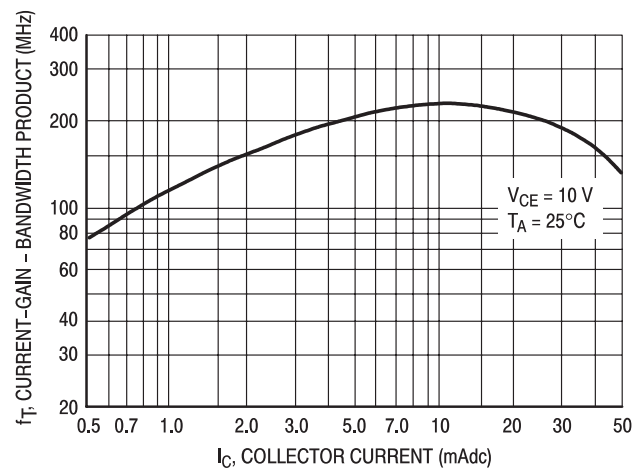


Figure 6 . Current-Gain - Bandwidth Product



BC847CPN

TYPICAL PNP CHARACTERISTICS

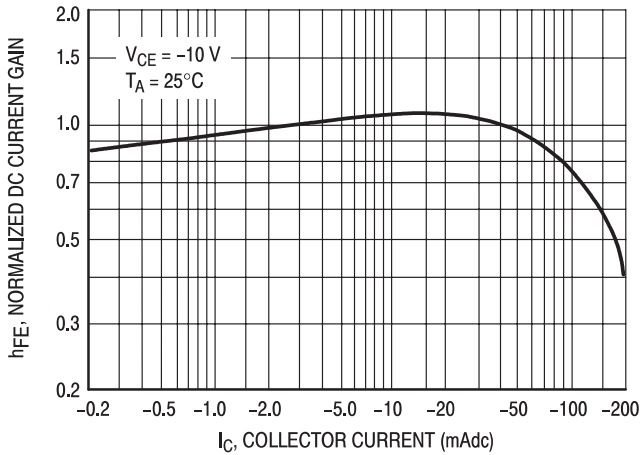


Figure 7 . Normalized DC Current Gain

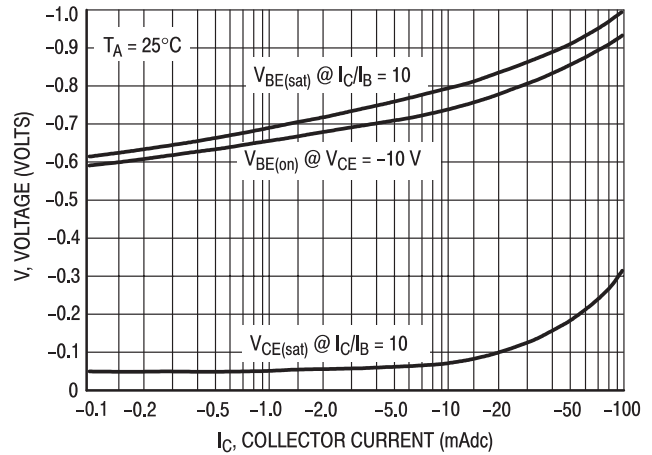


Figure 8 . "Saturation" and "On" Voltages

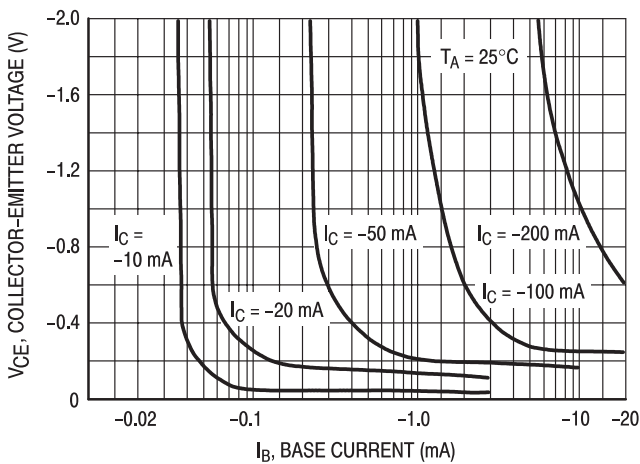


Figure 9 . Collector Saturation Region

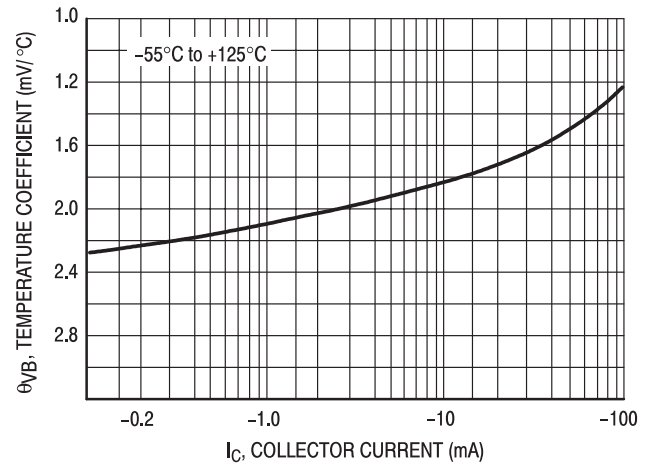


Figure 10 . Base-Emitter Temperature Coefficient

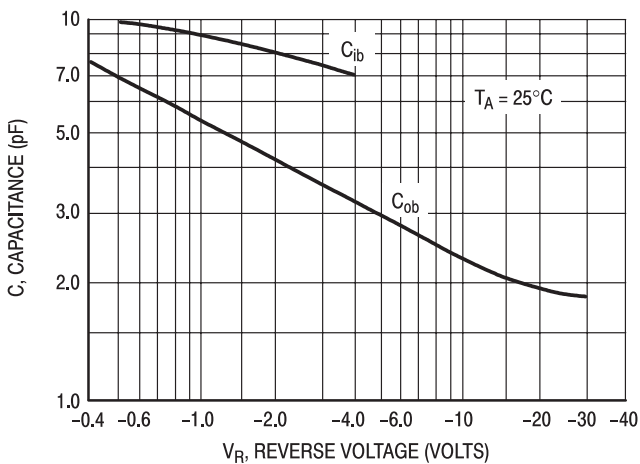


Figure 11 . Capacitances

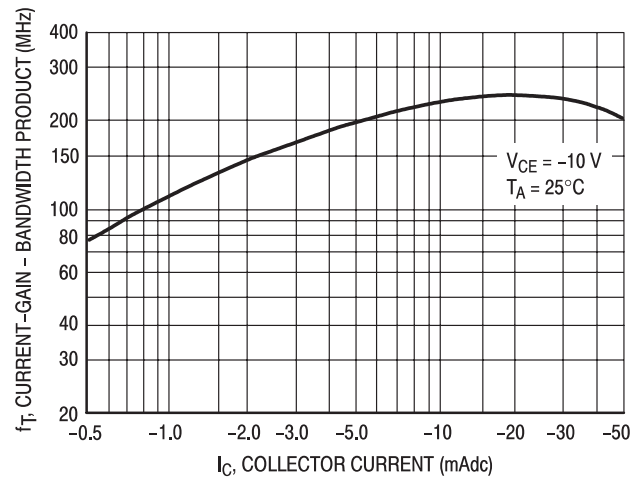


Figure 12 . Current-Gain - Bandwidth Product



BC847CPN

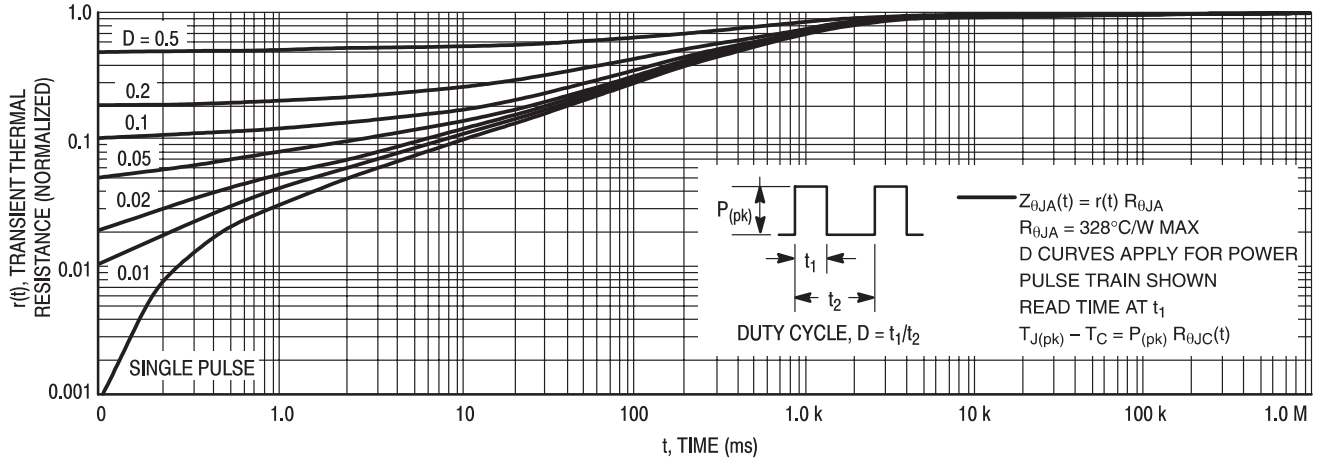


Figure 13. Thermal Response

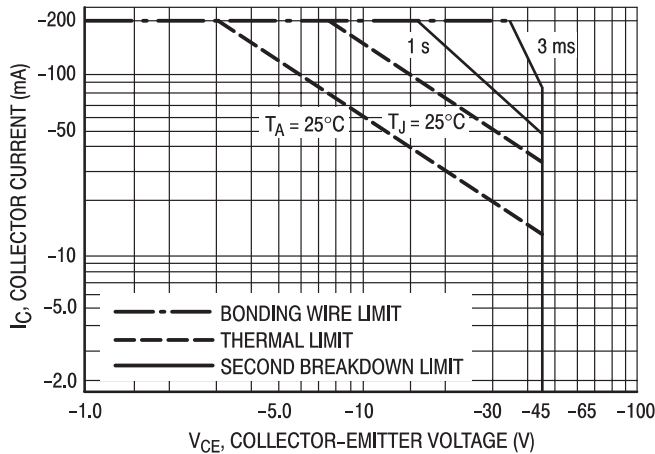


Figure 14 . Active Region Safe Operating Area


The safe operating area curves indicate I_C – V_{CE} limits of the transistor that must be observed for reliable operation. Collector load lines for specific circuits must fall below the limits indicated by the applicable curve.

The data of Figure 26 is based upon $T_{J(pk)} = 150^\circ\text{C}$; T_C or T_A is variable depending upon conditions. Pulse curves are valid for duty cycles to 10% provided $T_{J(pk)} \leq 150^\circ\text{C}$. $T_{J(pk)}$ may be calculated from the data in Figure 25. At high case or ambient temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by the secondary breakdown.



BC847CPN

MOUNTING PAD LAYOUT

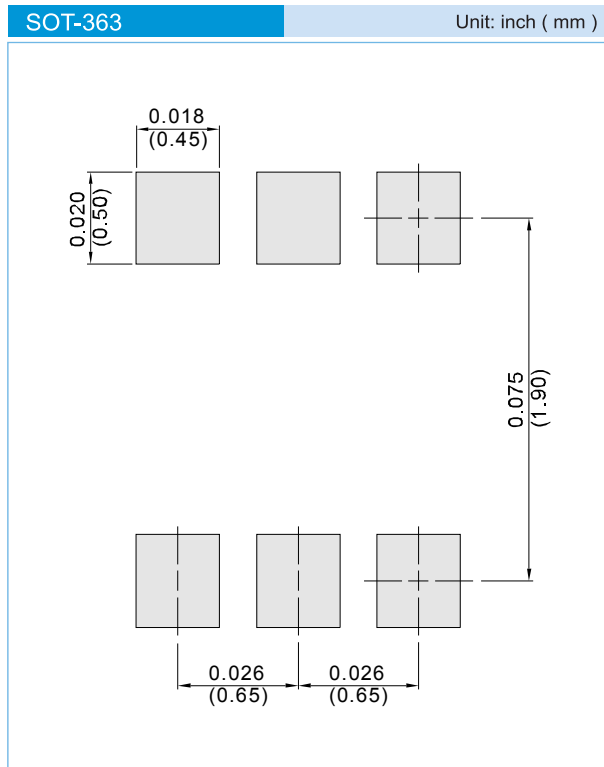

ORDER INFORMATION

- Packing information
 - T/R - 10K per 13" plastic Reel
 - T/R - 3K per 7" plastic Reel



BC847CPN

Part No_packing code_Version

BC847CPN_R1_00001

BC847CPN_R2_00001

For example :

RB500V-40_R2_00001



Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



BC847CPN

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.