

PNP BC261 – BC262 – BC263

LOW NOISE GENERAL PURPOSE AUDIO AMPLIFIERS

They are silicon planar epitaxial PNP transistors mounted in TO-18 metal package.

The BC261 is intended for audio amplifier driver stages.

The BC262 is intended for general purpose applications.

The BC263 is intended for low noise, high gain pre-amplifier stage.

Compliance to RoHS.

ABSOLUTE MAXIMUM RATINGS

Symbol		BC261	BC262	BC263	Unit
V_{CEO}	Collector-Emitter Voltage ($I_B = 0$)	-45	-25	-25	V
V_{CES}	Collector- Emitter Voltage ($V_{BE} = 0$)	-50	-30	-30	V
V_{EBO}	Emitter-Base Voltage ($I_C = 0$)	-5			V
I_C	Collector Current	-100			mA
I_{CM}	Collector Peak Current	-200			mA
P_D	Total Power Dissipation @ $T_{amb} = 25^\circ$	300			mW
T_J	Junction Temperature	175			$^\circ\text{C}$
T_{Stg}	Storage Temperature range	-55 to +150			$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS

$T_j = 25^\circ\text{C}$ unless otherwise specified

Symbol	Ratings	Test Condition(s)	Min	Typ	Max	Unit
I_{CBO}	Collector Cutoff Current $I_E = 0$	$V_{CB} = -45\text{ V}$ BC261	-	-	-50	nA
		$V_{CB} = -45\text{ V}$ $T_j = 150^\circ\text{C}$ BC261	-	-	-50	μA
		$V_{CB} = -20\text{ V}$ BC262 BC263	-	-	-50	nA
		$V_{CB} = -20\text{ V}$ $T_j = 150^\circ\text{C}$ BC262 BC263	-	-	-50	μA
V_{CEO}	Collector-Emitter Breakdown Voltage	$I_C = -2\text{ mA}$ $I_B = 0$ BC261	-45	-	-	V
		BC262	-25	-	-	
		BC263	-25	-	-	
V_{CES}	Collector- Emitter Voltage ($V_{BE} = 0$)	$I_C = -10\ \mu\text{A}$ $V_{BE} = 0$ BC261	-50	-	-	V
		BC262	-30	-	-	
		BC263	-30	-	-	
V_{EBO}	Emitter-Base Breakdown Voltage	$I_E = -10\ \mu\text{A}$ $I_C = 0$ BC261	-5	-	-	V
		BC262				
		BC263				

PNP BC261 – BC262 – BC263

ELECTRICAL CHARACTERISTICS

T_j=25°C unless otherwise specified

Symbol	Ratings	Test Condition(s)	Min	Typ	Max	Unit
V _{CE(SAT)}	Collector-Emitter saturation Voltage	I _C = -10 mA I _B = -0.5 mA	BC261	-	-	-300
			BC262			
			BC263			
		I _C = -100 mA I _B = -5 mA	BC261	-	-500	-
			BC262			
			BC263			
V _{BE(SAT)}	Base-Emitter Saturation Voltage	I _C = -10 mA I _B = -0.5 mA	BC261	-	-	-900
			BC262			
			BC263			
		I _C = -100 mA I _B = -5 mA	BC261	-	-850	-
			BC262			
			BC263			
H _{fe}	Small Signal Current Gain	I _C = -2 mA V _{CE} = 5 V f = 1 KHz	BC261A	125	-	260
			BC262A			
			BC263A			
			BC261B	240	-	500
			BC262B			
			BC263B			
			BC261C	450	-	900
			BC262C			
BC263C						
f _T	Transition frequency	I _C = -10 mA V _{CE} = -5 V f = 100 MHz	BC261	150	-	-
			BC262			
			BC263			
F	Noise figure	I _C = -200 μA V _{CE} = -5 V f = 1kHz R _g = 2kΩ	BC261	-	-	10
			BC262			10
			BC263			4
C _c	Collector capacitance	I _E = 0 V _{CB} = -10 V f = 1MHz	BC261	-	-	6
			BC262			
			BC263			


THERMAL CHARACTERISTICS

Symbol	Ratings	Value	Unit
R _{thJ-a}	Thermal Resistance, Junction to mounting base	500	°C/W
R _{thJ-c}	Thermal Resistance, Junction to ambient in free air	200	°C/W

PNP BC261 – BC262 – BC263

ECHANICAL DATA CASE TO-18

DIMENSIONS (mm)		
	min	max
A	12.7	-
B	-	0.49
C	0.9	-
D	-	5.3
E	-	4.9
F	-	5.8
G	2.54	-
H	-	1.2
I	-	1.16
L	45°	-

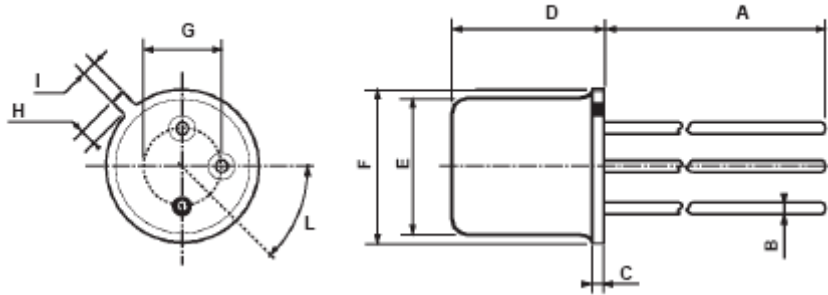

Pin 1 :	emitter
Pin 2 :	base
Pin 3 :	Collector
Case :	Collector

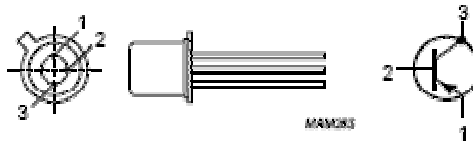


Fig.1 Simplified outline (TO-18) and symbol.

Revised November 2013

Information furnished is believed to be accurate and reliable. However, Comset Semiconductors assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may results from its use. Data are subject to change without notice. Comset Semiconductors makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Comset Semiconductors assume any liability arising out of the application or use of any product and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Comset Semiconductors' products are not authorized for use as critical components in life support devices or systems.