


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00136	Connector, dc plug, 4.0x1.7xL19.0 mm, spring contacts, brass nickel plated, yellow insulator	1	
2	30-00404	Wire, 2C TS, 24 AWG, UL2468, 300V, 80C, 3.0 mm, VW-1, PVC, 87A	1	
3	24-00001	Overmold, PVC	1	black

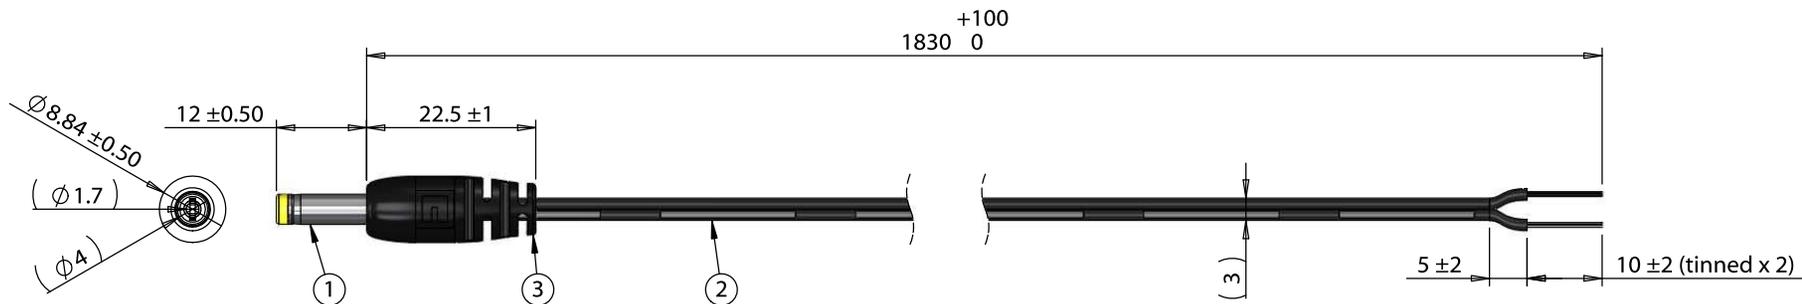

Notes:
Functionally equivalent components may be substituted

Wiring Diagram	
50-00136	wire color
center	black with stripe
sleeve	black

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>	
A	01/26/2018	Initial release	GL <small>Digitally signed by GL Date: 20180126 14:03:33 -0800</small>			RoHS compliant
			Verified:	Function test: no open, no short circuit, no intermittent	Size:	
			JP <small>Digitally signed by JP Date: 2018.02.13 13:36:03 -08'00'</small>	Description:	Part number:	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Cable, 1830 mm, 4.0x1.7x12 mm 50-00136 dc plug to 10 mm tinned, 24 AWG, UL2468, 30-00404 wire	A 10-02482	
					Scale: 1:1	
						Sheet 1 of 1

5

4

3

2

1