


Datamate J-Tek Connectors

Male Crimp Kit Extended Wall

- Extended Wall Datamate allows back potting to be performed.
- Fully shrouded contacts.
- Large Bore 22 AWG, Small Bore 24 – 28 AWG.
- Part numbers are for a complete kit of a housing and the applicable number of contacts.
- Crimp contacts are rear insertable and replaceable.
- Crimp contacts supplied loose.

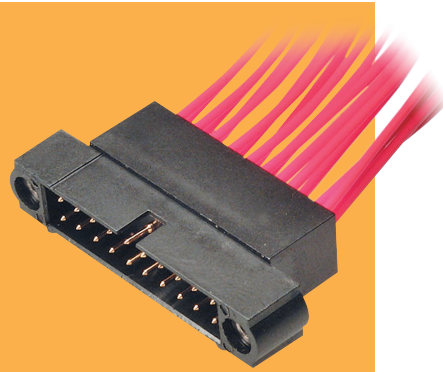

DATAMATE J-TEK

WITHOUT JACKSCREWS	WITH JACKSCREWS																
<div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <p style="text-align: center; background-color: #f4a460; margin: 0;">CALCULATION</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="background-color: #f4a460; width: 20px;">A</td> <td>B + 12</td> </tr> <tr> <td style="background-color: #f4a460;">B</td> <td>Total no. of contacts - 2</td> </tr> <tr> <td style="background-color: #f4a460;">C</td> <td>B + 7</td> </tr> </table> </div>	A	B + 12	B	Total no. of contacts - 2	C	B + 7											
A	B + 12																
B	Total no. of contacts - 2																
C	B + 7																
TOOLS	WIRE STRIPPING DETAILS																
<p>Recommended Crimp Tool - M22520/2-01</p> <p>Positioner - Z80-193</p> <p>Contact Insertion/Removal Tool - Z80-280</p> <ul style="list-style-type: none"> Spare contacts shown on following pages. Instruction sheets available at www.harwin.com/instructions. 																	
HOW TO ORDER																	
<p>M80 - 5XX XX 05 X</p>																	
<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p style="background-color: #f4a460; margin: 0;">SERIES CODE</p> </div> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="background-color: #f4a460;">TYPE</th> <th></th> </tr> </thead> <tbody> <tr> <td style="background-color: #f4a460;">575</td> <td>Large Bore (22 AWG), without Jackscrews</td> </tr> <tr> <td style="background-color: #f4a460;">576</td> <td>Small Bore (24-28 AWG), without Jackscrews</td> </tr> <tr> <td style="background-color: #f4a460;">565</td> <td>Large Bore (22 AWG), with Jackscrews</td> </tr> <tr> <td style="background-color: #f4a460;">566</td> <td>Small Bore (24-28 AWG), with Jackscrews</td> </tr> </tbody> </table>	TYPE		575	Large Bore (22 AWG), without Jackscrews	576	Small Bore (24-28 AWG), without Jackscrews	565	Large Bore (22 AWG), with Jackscrews	566	Small Bore (24-28 AWG), with Jackscrews	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p style="background-color: #f4a460; margin: 0;">WALL SIZE</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="background-color: #f4a460;">BLANK</td> <td>Wall = 5mm</td> </tr> <tr> <td style="background-color: #f4a460;">A</td> <td>Wall = 1mm</td> </tr> </table> </div> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p style="background-color: #f4a460; margin: 0;">FINISH</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="background-color: #f4a460;">05</td> <td>Gold</td> </tr> </table> </div> <div style="border: 1px solid black; padding: 5px;"> <p style="background-color: #f4a460; margin: 0;">TOTAL NO. OF CONTACTS</p> <p style="margin: 0;">06, 10, 14, 20, 26, 34</p> </div>	BLANK	Wall = 5mm	A	Wall = 1mm	05	Gold
TYPE																	
575	Large Bore (22 AWG), without Jackscrews																
576	Small Bore (24-28 AWG), without Jackscrews																
565	Large Bore (22 AWG), with Jackscrews																
566	Small Bore (24-28 AWG), with Jackscrews																
BLANK	Wall = 5mm																
A	Wall = 1mm																
05	Gold																

All dimensions in mm.